


REVISIONS	
A	March 2024

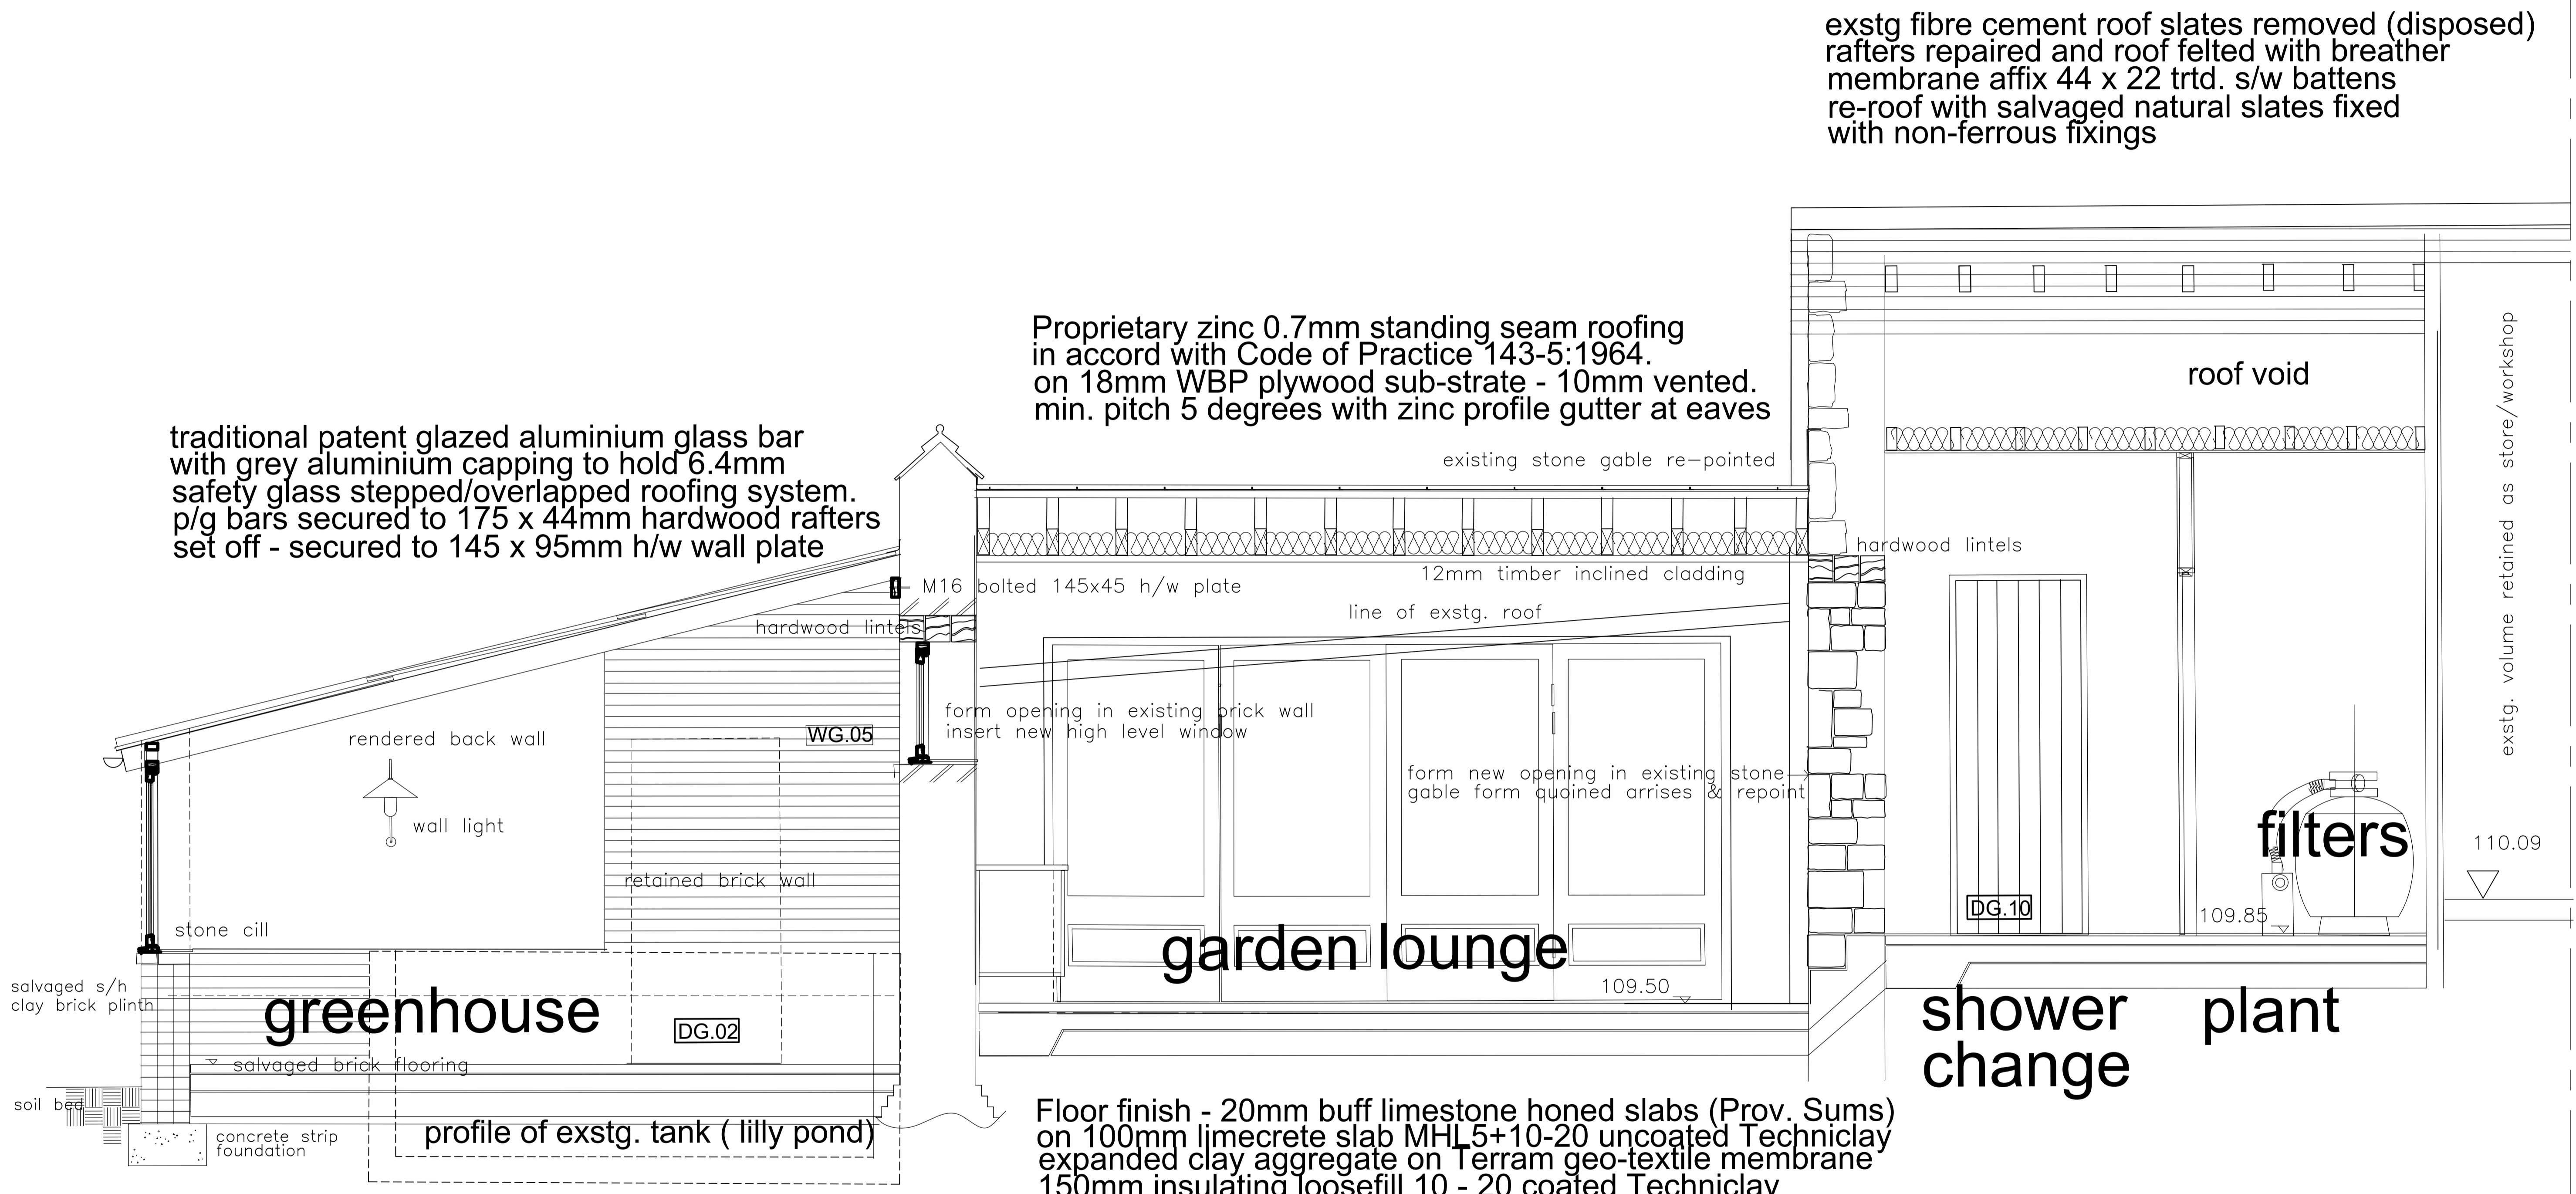

demolish existing conservatory and re-construct;
excavate trench for 500 x 300mm depth concrete
foundation strip - build solid 340mm salvaged red stock
clay brick plinth walls for a hardwood direct glazed
wall frame - incorporating DG 02 see details.

Floor finish - 20mm buff limestone honed slabs (Prov. Sums)
on 100mm limecrete slab MHL5+10-20 uncoated Techniclay
expanded clay aggregate on Terram geo-textile membrane
150mm insulating loosefill 10 - 20 coated Techniclay

SECTION X - LOWER BARNS

T H
A

TONY HERRING ASSOCIATES LTD
CHARTERED ARCHITECTS

JOB		
CEDAR LODGE NORTH SIDE STEEPLE ASTON OX25 4SE		
CLIENT		
ALEX & FRANCIS PASTEUR		
TITLE		
PROPOSED DETAIL SECTION X		
SCALE	DATE	DRWG. REF
1:20	Jan 2024	668.15A