

Viewpoint 4 - Existing View



Viewpoint Information			
OS Grid Reference	447094.50 231661.60	Horizontal Field of View	73°
Ground Level (AOD)	121.71m	Camera / Lens	Canon 5DS R / TS-e 24mm
Viewer Height	1.60m	Date / Time	03/01/2020 - 12:32
Distance to Site	0.5m	Weather Conditions	80% cloud, good visibility

Date: 10 November 2020
Drawing Number: C237_01/P01b
Drawn by: MP
Checked by: AP

Project title: Clifton Road, Deddington
Client:
Drawing Title: Viewpoint 4



Derelict building to be demolished

Chain-link fence to be removed

Rough grassland to be pasture



Braeside, Cotswold Close, Bourne, Brimscombe, Stroud, Gloucestershire GL5 2UA
t 01454 323348 e info@troopershill.co.uk www.troopershill.co.uk
Troopers Hill Limited Registered in England & Wales Number 02028113 Registered Office Braeside, Cotswold Close, Bourne, Brimscombe, Stroud, Gloucestershire GL5 2UA

Date: 10 November 2020
Drawing Number: C237_01/P01b
Drawn by: MP
Checked by: AP

Project title: Clifton Road, Deddington
Client:
Drawing Title: Viewpoint 4

Viewpoint 5 - Existing View




Viewpoint Information			
OS Grid Reference	447071.08 231771.45	Horizontal Field of View	73°
Ground Level (AOD)	124.90m	Camera / Lens	Canon 5DS R / TS-e 24mm
Viewer Height	1.60m	Date / Time	03/01/2020 - 14:44
Distance to Site	1.5m	Weather Conditions	80% cloud, good visibility

Date: 10 November 2020
Drawing Number: C237_01/P01b
Drawn by: MP
Checked by: AP

Project title: Clifton Road, Deddington
Client:
Drawing Title: Viewpoint 5

Viewpoint 5 - Proposed View

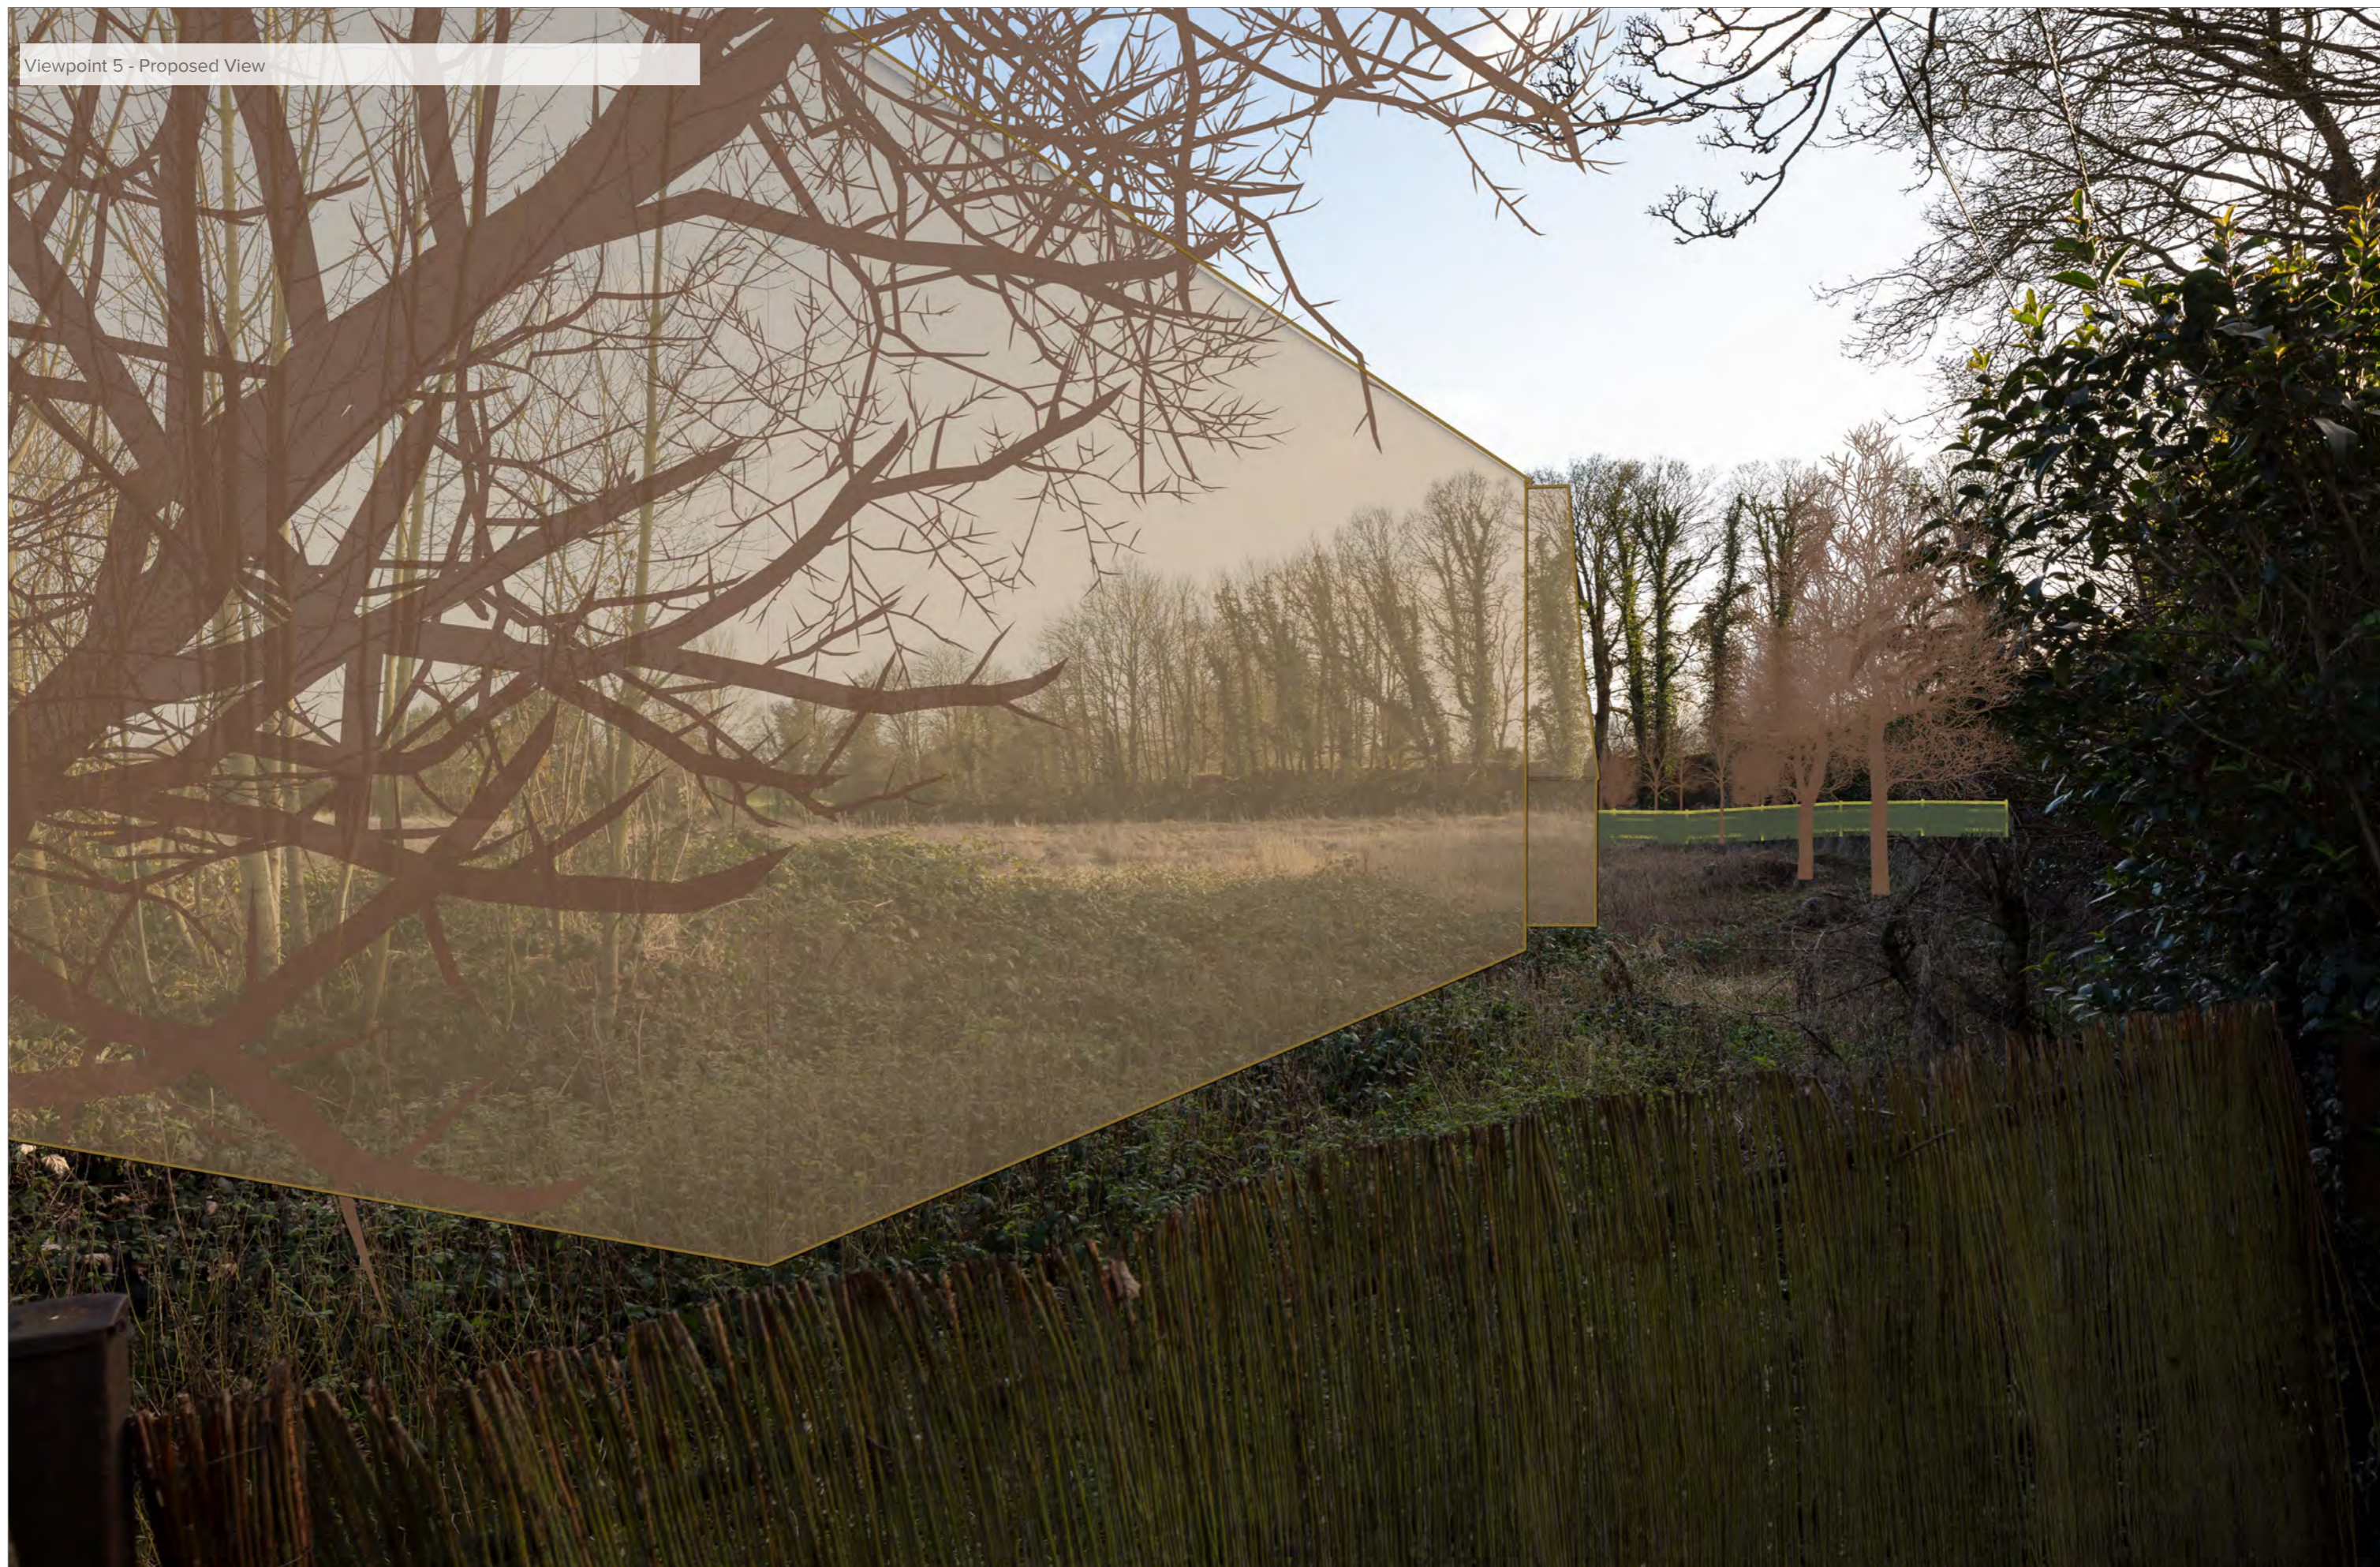

Braeside, Cotswold Close, Bourne, Brimscombe, Stroud, Gloucestershire GL5 2UA
t 01454 323348 e info@troopershill.co.uk www.troopershill.co.uk
Troopers Hill Limited Registered in England & Wales Number 02028113 Registered Office Braeside, Cotswold Close, Bourne, Brimscombe, Stroud, Gloucestershire GL5 2UA

Date: 10 November 2020
Drawing Number: C237_01/P01b
Drawn by: MP
Checked by: AP

Project title: Clifton Road, Deddington
Client:
Drawing Title: Viewpoint 5



Braeside, Cotswold Close, Bourne, Brimscombe, Stroud, Gloucestershire GL5 1UA
t 01454 323348 e info@troopershill.co.uk www.troopershill.co.uk
Troopers Hill Limited Registered in England & Wales Number 02052813 Registered Office Braeside, Cotswold Close, Bourne, Brimscombe, Stroud, Gloucestershire GL5 2UA

Date: 10 November 2020
Drawing Number: C237_01/P01b
Drawn by: MP
Checked by: AP

Project title: Clifton Road, Deddington
Client:
Drawing Title: Viewpoint 5

Viewpoint 6 - Existing View



Viewpoint Information			
OS Grid Reference	447141.60 231784.51	Horizontal Field of View	73°
Ground Level (AOD)	124.86m	Camera / Lens	Canon 5DS R / TS-e 24mm
Viewer Height	1.60m	Date / Time	03/01/2020 - 10:16
Distance to Site	7.5m	Weather Conditions	80% cloud, good visibility

Date: 10 November 2020
Drawing Number: C237_01/P01b
Drawn by: MP
Checked by: AP

Project title: Clifton Road, Deddington
Client:
Drawing Title: Viewpoint 6



Rough grassland to be pasture

Wire fence to be removed



Braeside, Cotswold Close, Bourne, Brimscombe, Stroud, Gloucestershire GL5 2UA
t 01454 323348 e info@troopershill.co.uk www.troopershill.co.uk
Troopers Hill Limited Registered in England & Wales Number 02028113 Registered Office Braeside, Cotswold Close, Bourne, Brimscombe, Stroud, Gloucestershire GL5 2UA

Date: 10 November 2020
Drawing Number: C237_01/P01b
Drawn by: MP
Checked by: AP

Project title: Clifton Road, Deddington
Client:
Drawing Title: Viewpoint 6

Clifton Road, Deddington
Appendix: Technical Methodology

June 2020

Overview

The process of generating verified views (also referred to as accurate visual representations (AVR)) for the Proposed Development at Clifton Road, Deddington, was carried out in conjunction with Troopers Hill (THL).

High quality/resolution photographs were taken from the agreed locations by Troopers Hill. An adequate number of visible features were subsequently surveyed, including the precise location and bearing of the camera. A geo-referenced development model was constructed to OSGB36. With a known camera position and orientation, photographic and surveyed existing visible features, the development model was accurately aligned to the photograph.

The AVRs produced have an estimated accuracy tolerance of +/-10cm.

The pages in this document should be printed at their intended size and not be scaled to fit smaller page sizes. Pages should be printed on A3 landscape paper (297mmx420mm), and viewed at a constant distance of 500mm.

Site visit

Troopers Hill visited the site on the 3rd January and 15th June 2020 to obtain viewpoint photography. The view positions were marked with paint and documented using photography of the exact positions. A survey was completed on the 29th December to record the precise co-ordinates of camera and control points.

Technical Methodology

This section explains in detail the processes involved in the preparation of Accurate Visual Representations (AVR) The following procedures set out an efficient, consistently accurate, robust, repeatable and traceable approach to achieve a high level of accuracy.

Verified photomontages, also referred to as Accurate Visual Representations (AVR) or Visually Verified Montages (VVM), are the 'top level' in terms of accuracy and documentation. Verified imagery is relied upon at public inquiry and in support of contentious planning applications/appeals and must therefore be robust and free from erroneous/ambiguous information. From the outset, a project where verified photomontages are required MUST be approached with the intention of absolute precision and will be based upon a traceable data set.

Standards

The work fully complies with the following guidance:

1. The Landscape Institute/IEEMA Guidelines for Landscape and Visual Impact Assessment (3rd edition 2013);
2. The Landscape Institute TGN 6/19 Visual representation of development proposals
3. The SPG London View Management Framework (March 2012).

Preparation

Following a formal instruction from the client, the scope of the project was agreed. The client identified a number of viewpoints and supplied a map of required view locations.

Focal length, image format, required content and context and AVR was agreed prior to the site visit. The photographer was familiar with the scope of the project and read any relevant information that was made available by the client.

Photography

The site visit was done on 3rd January and 15th June 2020, and consideration was made to:

1. Forecast weather conditions
2. Shot itinerary based on sun position/time of day
3. Access / distance to site / duration of journey to site and required time on site
4. Suitable parking

Equipment used (see Appendix B for specification):

1. Camera, in working order with charged batteries (Canon EOS 5DS R)
2. Empty CF cards, at least 3x32Gb cards and 128Gb across additional cards in various capacities in case of failure
3. Battery charger
4. Canon TS-e 24mm f/3.5LII
5. Lens cloth
6. Remote cabled shutter release
7. Tripod with indexed/panoramic head (Manfrotto 303)
8. Tripod head levelling base (Manfrotto 438)
9. Small magnetic spirit level
10. Plumb bob
11. Spray paint (upside down street marking paint)
12. Hilti nails / pegs and hammer
13. Tape measure

Lens Selection Criteria

In consideration of the townscape setting of the views and in order to capture appropriate and relevant context, it was agreed that a 24mm lens was the most appropriate lens for the localised shots, and a 50mm lens for the distant shot.

On site procedure

1. Based on the order of viewpoints on the itinerary, each view location was visited. The tripod was erected and camera attached, along with the 50mm/24mm lens, shutter release, spirit level and plumb bob. The bob was hung from the bottom of central tripod assembly after a nodal point adjustment

had been made.

2. The height of the lens' central axis above ground level was measured and set to 1.60m using the tape measure.
3. A spray paint mark was used directly below the plumb bob to mark the location for the surveyor to measure.
4. Using a camera phone 4 shots (n,e,s,w) were taken of the assembled tripod, camera and bob in situ over the marker. A shot of the marker was also captured.
5. The following camera settings were used:
 - Manual 'M' mode
 - Bracket set to +/- 0.75 stops
 - Aperture at f8 to ensure wide depth of field and minimal diffraction.
 - ISO <100
 - Auto White Balance (AWB)
 - Evaluative metering
 - RAW capture only to avoid loss of dynamic range and image quality degradation associated with 8bit jpeg format
 - Enabled highlight warning
 - Check that TS-E lens is not 'tilted' or shifted if in use
 - Used 'Live View' and zoom function to fix and verify focus on the site, This also enables 'mirror lockup' and therefore less camera shake.
 - Evaluative metering
6. A sufficient horizontal field of view was determined to include the site and sufficient relevant context, vertical field of view was also considered based on height of the proposals and proximity to the site.
7. The tripod was levelled using the tripod mounted level. Following this the tripod head was levelled using the levelling base. The levelling base was micro-adjusted by partially engaging the clamp. Using the digital level built in to the camera, pitch and yaw angles were adjusted to achieve level.
8. With the camera centred on the site, 'live view' and x10 magnification was enabled and an appropriate point was identified to focus on.
9. Once focused, and accounting for conditions, the correct exposure was achieved by adjusting the shutter speed.
10. Three bracketed shots were taken at -0.75 0.00 +0.75.
11. Shots were previewed to check the quality, focus, highlight warning and histogram for the shots to ensure that a well exposed usable set of photographs had been captured.
12. ETR (expose to the right) method was used to achieve noise free shots - using the histogram and bracketing the shutter speed was adjusted to achieve an over exposed (but not clipped) +0.75 bracket shot.

Date: 12 May 2020
Drawing Number: C237_01/P01
Drawn by: MP
Checked by: AP

Project title: Clifton Road, Deddington
Client:

Photography Post Processing

RAW files were processed in Adobe Camera Raw after shot approval in Adobe Bridge. The processed RAW files were then taken into Adobe Photoshop to be saved as full resolution TIF files. The process was as follows:

AVR Control (Survey)

The AVR control survey was carried out 3rd January and 15th June 2020.

Survey Methodology

Survey Equipment Required (see Appendix B for specification)

- Leica 1200 series GPS Smartnet enabled dual receiver (GPS and GLONASS)
- Leica Total Station (1201 or TS16) 1' accuracy with 1000m reflectorless laser

Field Survey Methodology

- **Camera locations:** where possible, the camera position was used as a setup point for the total station, enabling the re-creation of the view as seen in the imagery and reducing the risk of incorrect interpretation of detail. Connection was via GPS Smartnet derived control points in OSGB datum and grid. 3-4 control stations were used, to ensure long distance accuracies and to identify possible outliers.
- Reference points visible in the photography were measured with reflectorless means from the total station. Where long distance views had suitable detail too far from the camera station, further setups were used closer to the detail. Common visible detail points were observed from different setup points to check and increase accuracy achieved.
- Using realtime correction (RTK) accuracies of camera positions are to the low centimetre, while accuracies of surveyed detail vary due to setup geometry and distance, but will be usually in the low centimetre range and always below 30 centimetres.

Data Processing & Delivery

Data was processed using industry standard software (Leica GeoOffice and TerraModel) to create points listings. Digital photos were taken by the survey Total Station to aid identification of points. All points are to OSGB36 grid and datum, to allow the use of common Ordnance Survey products and industry standard site surveys.

AVR Production

Modelling of the Proposals

A model of the proposed development was provided by the project Architect. A full set of CAD (DWG) floor plans was also made available by the project architect in order to verify the accuracy of the supplied 3D model.

Autodesk 3DS MAX 2019 was used to bring together the proposed scheme model, site plans and survey data to generate a master 3D environment.

Autodesk 3DS Max has poor floating point performance and requires that OSGB36 coordinate based drawings and models need to be reprojected nearer to scene origin (0,0).

A project global shift value (x and y axis) was designated when modelling was started. This value was a coordinate for the centre of the site. All drawings were corrected by the global shift value.

Importing of AVR Control Survey Data

The point data provided by the surveyor for control points and camera location was in e,n,z format and delivered as a *.csv. This data was imported in to 3DS Max using a script and was also corrected to the global shift value. When imported virtual cameras were created where specified in the data, and all control points were positioned where specified in the data.

Aligning the 3D Scene to the Baseline Photography

3DS MAX was used to generate high resolution *renders from the virtual cameras set up in the 3D environment

**Rendering is the process of generating an image from a model (or models in what collectively could be called the 3D environment), by means of computer programs - specifically, in this case Chaos Group V-Ray Next for Autodesk 3Ds Max 2019.*

The virtual camera was configured to match the same field of view and bearing to that of the baseline photograph.

The render from each camera shows each control point as a red cross. In order for the render to match the planar projection of the photograph it was necessary to render the points to a planar projection (using the default camera projection in V-Ray Next by specifying exact horizontal and vertical field of view parameters)

This render of the control points was taken into Adobe Photoshop converted to a smart object and overlaid on to the baseline photograph. The smart object was scaled (uniformly) so that the control point markers aligned to the same objects measured by the surveyor. The position of the smart object was locked so that it could not be moved accidentally.

The baseline photography was then effectively aligned to the 3D environment, and when the proposed model was rendered (in planar projection) from this environment and placed in to the smart object it was therefore automatically correctly positioned in the photograph.

Output of the finished AVR

The style of AVR was discussed with the client and it was agreed that wireframe visualisations were required.

To produce the wireframes a render was generated from the 3D model and subsequently inserted in to the aligned smart object. Masks were applied to the smart object to hide aspects of the proposed scheme that are hidden by existing features.

Using Adobe InDesign, each completed AVR was presented in a document that conforms with the relevant guidance.

Mitchell Peacock



On behalf of Troopers Hill Limited
Braeside, Cotswold Close
Bourne
Brimscombe
Stroud
Gloucestershire
GL5 2UA

Date:	12 May 2020
Drawing Number:	C237_01/P01
Drawn by:	MP
Checked by:	AP

Project title:	Clifton Road, Deddington
Client:	

Appendix B: Equipment Specification

Camera: Canon 5DSR



Image sensor type	CMOS sensor
Image sensor size	Approx. 36.0 x 24.0 mm
Processor	Dual DIGIC 6
Effective pixels	Approx. 50.6 megapixels
Max resolution	8688 x 5792 pixels
Lens mount	Canon EF mount
Image type	JPEG, RAW (14-bit Canon original), RAW+JPEG simultaneous recording possible
Crop/aspect ratio	Full-frame / Approx. 1.3x [crop] / Approx. 1.6x [crop] / 1:1 [aspect ratio] / 4:3 [aspect ratio] / 16:9 [aspect ratio]
LCD Monitor-type	TFT color, liquid-crystal monitor
Monitor size and dots	3.2"-in [3.2] with approx. 1.04 million dots
AF points	61 (up to 41 cross-type points)
Focus operation	One-Shot AF, AI Servo AF, AI Focus AF, Manual Focusing (MF)
AF fine adjustment	AF Micro adjustment [All lenses by the same amount, Adjust by lens]
Exposure Metering mode	Approx. 150,000-pixel RGB+IR metering sensor and 252-zone TTL metering at max. aperture EOS iSA [Intelligent Subject Analysis] system
ISO speed	100 - 6400 [expandable to 50 and 12800]
Exposure compensation	±5 [at 1/3 EV, 1/2 EV steps]
AE Bracketing	±3 stops in 1/3- or 1/2-stop increments [can be combined with manual exposure compensation]
Anti-flicker	Possible
Interval timer	Shooting interval and shot count settable
Bulb timer	Bulb exposure time settable
HDR Shooting - Dynamic range adjustment	Auto, ±1, ±2, ±3
Multiple exposures -Shooting method	Function/control priority, Continuous shooting priority
Number of multiple exposures	2 to 9 exposures
Multiple-exposures control	Additive, Average, Bright, Dark
Shutter speed	1/8000 sec. to 30 sec. Bulb, X-sync at 1/200 sec.
Continuous shooting speed	Approx. 5 frames-per-second
Max. burst [With full-frame]*	JPEG Large/Fine : Approx. 31 shots [approx. 510 shots] RAW : Approx. 12 shots [approx. 14 shots] RAW+JPEG Large/Fine : Approx. 12 shots [approx. 12 shots]
Compatible Speedlites	EX-series Speedlites
Flash metering	E-TTL II autofocus
Flash exposure compensation	±3 stops in 1/3- or 1/2-stop increments
PC terminal	Provided
Live view shooting - focus method	Contrast-detection AF system [Face+Tracking, FlexiZone-Single] Manual focus [approx. 6x and 16x magnified view possible for focus check]
Continuous AF	Provided
Recording format	MOV
Movie	MPEG-4 AVC / H.264 Variable (average) bit rate
Audio	Linear PCM
Recording size and frame rate	Full HD [1920x1080] : 29.97p/25.00p/23.98p HD [1280x720] : 59.94p/50.00p VGA [640x480] : 29.97p/25.00p
Dimensions [W x H x D]:	Approx. 152.0 x 116.4 x 76.4mm / 5.98 x 4.58 x 3.01 in.
Weight:	Approx. 930 g / 32.80 oz. [Based on CIPA Guidelines] Approx. 845 g / 29.80 oz. [Body only]

Lens: Canon 50mm f/1.4 USM



Angle of view (horzntl, vertl, diagnl)	40°, 27°, 46°
Lens construction (elements/groups)	7/6
No. of diaphragm blades	8
Minimum aperture	22
Closest focusing distance (m)	0.45
Maximum magnification (x)	0.15
AF actuator	Micro USM ¹
Filter diameter (mm)	58
Max. diameter x length (mm)	73.8 x 50.5
Weight (g)	290

Lens: Canon TS-E 24mm 3.5L II



Angle of view (horzntl, vertl, diagnl)	74°, 53°, 84°
Lens construction (elements/groups)	16/11
No. of diaphragm blades	8
Minimum aperture	22
Closest focusing distance (m)	0.21
Maximum magnification (x)	0.34
Distance information	Yes
Filter diameter (mm)	82
Max. diameter x length (mm)	88.5 x 106.9
Weight (g)	780

Tripod Head: Manfrotto 303PIUS Panoramic Head + 300N Rotation Unit



- sliding plates for nodal point positioning
- Elbow bracket to allow camera to be mounted in either portrait or landscape orientation

Survey GPS: Leica 1200



Receiver	GX1230
Type	Dual frequency
Channels	12 L1 + 12 L2 / WAAS / EGNOS
RTK	Yes
Power consumption	5.2W (receiver + controller + antenna)
Batteries	Two Li-Ion 3.8Ah/7.2V mini batteries
	Power receiver + controller + antenna for about 15 hours (static mode)
	Power receiver + controller + antenna + radio for about 10 hours (RTK mode)
External supply	Nominal 12V DC (10.5 to 28V allowed)
Weight	1.20kg
Temperature	Operation: -40 to +65 C, Storage: -40 to 80 C
RTK Accuracy	Horizontal: 10mm + 1ppm, Vertical: 20mm + 1ppm (kinematic)
Post-Processed	Horizontal: 5mm + 0.5ppm, Vertical: 10mm + 0.5ppm (static)
Data logging	Compact Flash cards: 256Mb, typical spec:- About 4,400 hours L1+L2 logging at 15 sec rate About 17,600 hours L1+L2 logging at 60 sec rate About 360,000 RTK points with codes
Controller	RX1210T
Display	High contrast 1/4 VGA touch screen, 11 lines x 32 characters
Keypad	Full illuminated QWERTY keypad with user definable keys
Weight	0.48kg
Temperature	Operation: -30 to +65 C, Storage: -40 to 80 C
Antenna	SmartTrack AX1202
Weight	0.44kg
Temperature	Operation: -40 to +70 C, Storage: -55 to 85 C

Survey Total Station: Leica TPS 1201+



Angle measurement		Type 1201+	Type 1202+	Type 1203+	Type 1205+
Accuracy (std. dev., ISO 17123-3)	1", V	1" (0.3 mgon)	2" (0.6 mgon)	3" (1 mgon)	5" (1.5 mgon)
	Display resolution:	0.1" (0.1 mgon)	0.1" (0.1 mgon)	0.1" (0.1 mgon)	0.1" (0.1 mgon)
Method	absolute, continuous, diametrical				
Compensator	Working range:	4' (0.07 gon)	4' (0.07 gon)	4' (0.07 gon)	4' (0.07 gon)
	Setting accuracy:	0.5" (0.2 mgon)	0.5" (0.2 mgon)	1.0" (0.3 mgon)	1.5" (0.5 mgon)
	Method:	centralized dual axis compensator			

Distance measurement (IR-Mode)	
Range	Round prism (GPR1): 3000 m
(average atmospheric conditions)	360° reflector (GR24): 1500 m
	Mini prism (CAMP101): 1200 m
	Reflective tape (60 mm x 60mm): 250 m
	Shortest measurable distance: 1.5 m
Accuracy / Measurement time	Standard mode: 1 mm + 1.5 ppm / typ. 2.4 s
(standard deviation, ISO 17123-4)	Fast mode: 3 mm + 1.5 ppm / typ. 0.8 s
	Tracking mode: 3 mm + 1.5 ppm / typ. <0.15 s
	Display resolution: 0.1 mm
Method	Special phase shift analyzer (crosshair, visible red laser)

PinPoint R400/R1000 reflectorless distance measurement (RL-Mode)	
Range	PinPoint R400: 400 m / 200 m (Kodak Gray Card: 90% reflective / 18% reflective)
(average atmospheric conditions)	PinPoint R1000: 1000 m / 500 m (Kodak Gray Card: 90% reflective / 18% reflective)
	Shortest measurable distance: 1.5 m
	Long Range to round prism (GPR1): 1000 m - 7500 m
Accuracy / Measurement time	Reflectorless < 500 m: 2 mm + 2 ppm / typ. 3 - 6 s, max. 12 s
(standard deviation, ISO 17123-4)	Reflectorless > 500 m: 4 mm + 2 ppm / typ. 3 - 6 s, max. 12 s
	Long Range: 5 mm + 2 ppm / typ. 2-5 s, max. 12 s
	(objects in shade, sky overcast)
Laser dot size	At 30 m: approx. 7 mm x 10 mm
	At 50 m: approx. 8 mm x 20 mm
Method	PinPoint R400 / R1000: System analyzer (crosshair, visible red laser)

Date: 12 May 2020
 Drawing Number: C237_01/P01
 Drawn by: MP
 Checked by: AP

Project title: Clifton Road, Deddington
 Client: