




PLANTING NOTES
 All plants to be supplied in accordance with the JTA National Plant Specification and from a HTA certified nursery. All plants and trees to be planted in accordance with BS3096 and BS6545. Delivery and handling of all plant material to be in accordance with BS4285:CLC/CPSE Code of Practice for 'Handling and Establishing Landscape Plants' Parts I, II and III and BS6545.
Planting Pit and Trench Preparation
 Tree pits in soft landscape to be excavated to 1m x 1m x 1m depth prior to topsoiling and all shrub planting areas excavated to 400mm depth. All proposed hedge planting trenches to be excavated to 600mm depth. Unless otherwise specified, all tree pits in hard landscape to be 2m x 2m x 1m, backfilled with compacted Urban Tree Soil.
 The preparation of planting pits, beds or trenches shall comply with the appropriate British Standards, namely BS4043, BS4428, BS5037 and BS6545.
 Excavation of planting pits, beds or trenches shall not take place when the ground is frozen or waterlogged such that damage may occur to the structure of the soil. All excavated areas to be backfilled with either site won topsoil or imported topsoil to be BS3082 General purpose grade. All topsoiled areas to be clear of rocks and rubble larger than 50mm diameter and any other debris that may interfere with the establishment of plants. The Contractor shall break up and subgrade at the base of the trenches or planting pits. The sides of the trenches or planting pits shall be loosened with a fork or other similar implement. All stones and the like over 75mm in any dimension, deleterious matter, weeds and weed seeds brought to the surface by any cultivation of excavations shall be removed of site. The Contractor shall remove of site the excavated subsoil/fill material when preparing planting pits. The imported topsoil should make up any deficiencies caused by the removal of the subsoil/fill material. Trenches and pits shall have the topsoil and any subsoil/fill material thoroughly broken up and mixed prior to backfilling.
 All trees shall be supplied root balled, unless otherwise stated. Root balled trees shall be well grown, healthy and with a compact, contained rootball. They shall be nursery grown and have been regularly watered. Prior to planting, all plant material shall be stored and stored at in accordance with best practice.
Planting
 All plants shall be planted in a random fashion avoiding formal regimented lines at densities indicated in the schedule, unless otherwise specified. Unless otherwise specified, all hedgerows shall be planted in a double staggered rows and hedgerow mixes shall be planted in groups of 7, 9 & 13 at densities indicated on the schedule. Ornamental shrub planting mixes shall be planted in groups of 5, 7, 9, 11 and native shrub planting mixes shall be planted in groups of 9, 13 & 15. The selection, procurement, handling, storage and planting operations of all proposed trees shall be in accordance with BS6545:2014 - 'Trees from nursery to implementation in the landscape', recommendations.
 Planting and associated operations shall comply with BS4043, BS4428, BS5037 and BS6545. Unless otherwise stated planting shall be carried out during the period of 1 Nov to 31 March when the ground is not frozen or water logged, if planting is required outside this period agreement shall be sought and all bare root plants shall be substituted with container grown stock.
Watering
 All plants shall be watered in to field capacity immediately after planting and mulched with 20mm depth of medium grade crushed mulch. The Contractor shall water the trees, shrubs and hedges once planted so that the entire tree pit or planted area is maintained to field capacity, i.e. 'the amount of water retained by previously saturated soil once full drainage has ceased'. Watering to field capacity shall continue frequently and on a regular basis as considered necessary by the landscape contractor and as necessary to ensure the successful establishment and continued thriving of all planting. Additional watering shall be undertaken during summer months and/or periods of drought. Post planting management and maintenance specifically for new tree planting shall include ongoing irrigation and formative pruning as outlined in BS6545. The period over which regular irrigation required for transplanted trees is likely to be at least two full growing seasons to ensure successful establishment. As the root system develops the frequency of irrigation can be reduced.
Staking
 All trees within soft landscape areas to be double staked with cross bar and tied, using 1.5m long, 75mm diameter rounded free stakes 75mm brace, rubber tie and spacer block. Stakes not to extend more than 650mm above ground level. All trees within hardstanding/highway visibility areas to be clear stem to 1.5m high unless otherwise specified. Trees within hardstanding / specific pits to be underground guyed unless otherwise specified.
Root Barriers
 Root barriers (ReRoot 1000 or equivalent) to be included adjacent to buildings and services where necessary. Landscape contractor shall check all planting operations comply with appropriate standards and that in the absence of detailed surveys, any necessary underground investigations are undertaken to ensure there are no conflicts with existing or proposed utilities, services or foundations.
 Existing trees to be retained shall be protected in accordance with BS5037, from commencement to completion of all works on site.

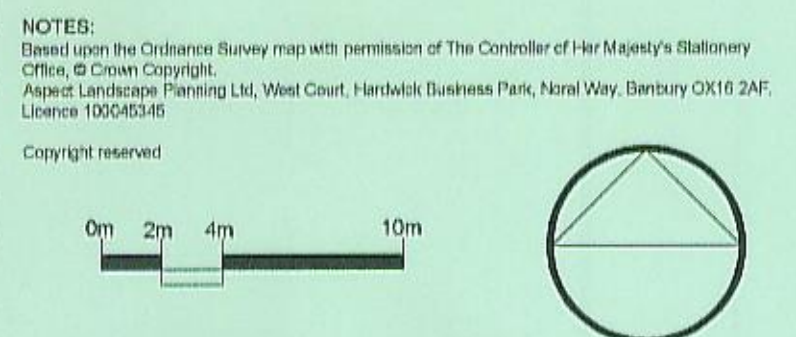

- KEY:**
- Site Boundary
 - Existing Trees
 - Existing Shrubs
 - Proposed Trees
 - Proposed Hedge
 - Proposed Feature Shrub
 - Proposed Shrubs
 - Proposed Amenity Grass / Turf
 - Proposed Wildflower Mix
 - Tree Protection Fencing
 - Proposed Root Barrier
 - Visibility Splay

- KEY:**
- Existing BT Main Underground
 - Existing Drainage Foul Water
 - Existing Drainage Surface Water
 - Existing Electricity Main High Voltage Underground
 - Existing Electricity Main Low Voltage Underground
 - Existing Gas Main Low Pressure (diameter & material shown)
 - Existing Water Main (diameter & material shown)
 - Existing Water Main Wash Out
 - Existing Water Main Skilake Valve
 - Existing Water Main Fire Hydrant
 - Proposed Water Main (diameter & material shown)
 - Proposed Water Service
 - Proposed Water Main Washout
 - Proposed Water Main Skilake Valve
 - Proposed Water Main Fire Hydrant
 - Proposed Gas Main Low Pressure (diameter & material shown)
 - Proposed Gas Service
 - Proposed Electricity Main High Voltage Underground
 - Proposed Electricity Main Low Voltage Underground
 - Proposed Electricity Service
 - Proposed Electricity Feeder Pillar
 - Proposed BT Main Underground
 - Proposed BT Service

CHEWELL DISTRICT COUNCIL
 Plan No. 16/00/344/1/DC
 Amended/additional plans received
 17.11.16 with Applicants/Agent's
 Letter dated 17.11.16
 16/00/344/1/DC

REV	DATE	NOTE	CW	AM
B	22.11.16	Updated to clients comments to show services	CW	AM
A	10.11.16	Updated to planners comments and foundations	CW	AM
			CW	AM

aspect landscape planning

TITLE
 Kingsmere
 Planting Plan - 2 of 4

CLIENT
 Bellway Homes

SCALE	DATE	DRAWN	CHKD
1:250@A1	AUG 2016	CW	AM
DRAWING NUMBER	REVISION		
57971 ASP.5.2	B		