

2. UNLESS NOTED OTHERWISE, ALL VERTICAL DIMENSIONS ARE MEASURED FROM DPC/FFL.

INDICATES THE VERTICAL DISTANCE ABOVE DPC/FFL

3. EAVES DIMENSION SHOWN MEASURED FROM BRICK/BLOCK FACE TO EXTERNAL FACE OF FASCIA

4. WINDOW LEGEND, REFERENCES AND ABBREVIATIONS USED:

W WINDOW/EXTERNAL DOOR
SG DENOTES SAFETY GLASS

**DENOTES SAFETY GLASS

**DENOTES SAFETY GLASS

**DENOTES SAFETY GLASS

WITH AD PART BI

BUT EXTERNAL MOVEMENT JOINT

FFL FINISHED FLOOR LEVEL

FFL FINISHED JELING LEVEL


RWP RAIN WATER PIPE


(OB) DENOTES OBSCURE GLASS

5. MINIMUM DISTANCE BETWEEN EXTRACTS AND OPENINGS TO BE 300MM. SIZES OF EXTRACTS AND FLUES TO BE AS MANUFACTURER'S RECOMMENDATIONS. COLOURS TO MATCH SURROUNDING MATERIAL AS APPROPRIATE.

8. FOR ALL MOVEMENT JOINT LOCATIONS REFER TO STRUCTURAL ENGINEERS DRAWINGS - COLOUR OF MOVEMENT JOINT SEALANT TO MATCH FACING BRICK.

9. ELEVATIONS SHOWN ARE FOR A TYPICAL DETACHED UNIT "AS DRAWN". REFER TO THE RELEVANT BLOCK PLAN DRAWINGS FOR TERRACE GARAGES.




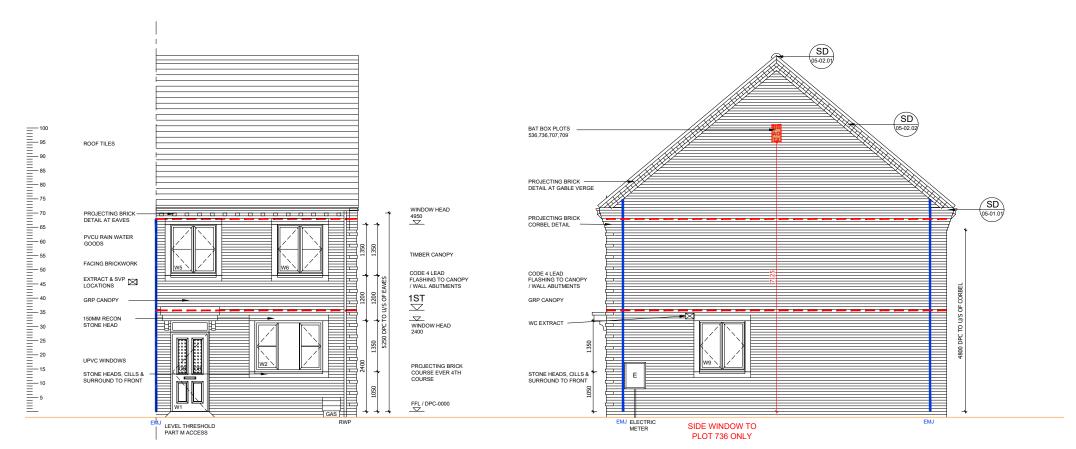

FRONT ELEVATION

SIDE ELEVATION

TYPICAL BRICK CORBEL DETAIL

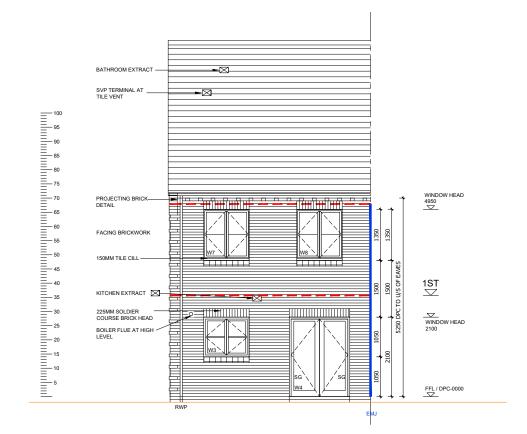

REAR ELEVATION

WINDOW/EXTERNAL DOOR SCHEDULE					
REF	WIDTHXHEIGHT	ROOM NAME	LINTEL REF.	SAFETY GLAZING	REMARKS
W1	1065 X 2400	ENTRANCE HALL	L1	PAS 24	914X2000 DOOR LEAF - PART M ACCESS
W2	1850 X 1350	LIVING ROOM	L2	PAS 24	MIN 2500MM2 TRICKLE VENTILATION
W3	1250 X 1050	KITCHEN	L3	PAS 24	MIN 2500MM2 TRICKLE VENTILATION
W4 SG	1650 X 2100	DINING	L4	PAS 24	PATIO DOORS- SAFETY GLAZING
W5#	1250 X 1350	BEDROOM 1	L5	NO	MIN 2500MM ² TRICKLE VENTILATION P1A GLAZING
W6#	1250 X 1350	BEDROOM 1	L6	NO	MIN 2500MM2 TRICKLE VENTILATION
W7#	1250 X 1350	BEDROOM 3	L7	NO	MIN 2500MM ² TRICKLE VENTILATION P1A GLAZING
W8#	1250 X 1350	BEDROOM 2	L8	NO	MIN 2500MM ² TRICKLE VENTILATION P1A GLAZING
W9	1250 X 1350	LIVING ROOM	L9	PAS 24	PLOTS 518 & 736 ONLY MIN 2500MM ² TRICKLE VENTILATION

PHASE 9A PLOTS - (AS) 536 - (OPP) 537 PHASE 9D PLOTS - (AS) 706,708,736 - (OPP) 707,709,735

