



Our Ref: P1637

Date: 14th October 2021

Cherwell District Council
Bodicote House
White Post Rd
Bodicote
Banbury
OX15 4AA

Grosvenor House
75-76 Francis Road
Edgbaston
Birmingham B16 8SP

T 0121 455 9455
F 0121 455 6595

Dear Sirs,

**West Of Cricket Field Nor, Wykham Lane, Bodicote
Replan of the western part of the residential development permitted through Reserved
Matters application 19/00895/REM for the delivery of 107 dwellings.
Energy Statement**

Harris Lamb Planning Consultancy ("HLPC") are instructed on behalf of BDW Trading Limited ("The Applicant") to submit a full planning application for the replan of the western part of the residential development permitted through Reserved Matters application 19/00895/REM for the delivery of 107 dwellings. Please find enclosed the Energy Report July 2019 and Addendum Report dated June 2020 submitted in respect of the above application.

Both of these documents have previously been approved as part of the discharge of condition 26 of planning permission reference 15/01326/OUT (application reference 19/01643/DISC). A copy of the Decision Notice is enclosed at item 3. Below for your reference. The Energy Report and Addendum have already been approved and are applicable to this Application site and the wider site. It is, therefore, proposed that the same measures will be applied to the dwellings proposed under this application in order to ensure consistency with the wider site. The Energy Report and Addendum are, therefore, resubmitted as part of this application.

I trust that the above is in order. If you have any questions, please do not hesitate to ask.

Kind regards

**Olivia Morris BA (Hons) MSc MRTPI
Planner**
Olivia.morris@harrislamb.com

BIRMINGHAM
0121 455 9455

NOTTINGHAM
0115 947 6236

STOKE-ON-TRENT
01782 272555

WORCESTER
01905 22666



1. Energy Report - July 2019





Energy Report

White Post Road

Client: Barratt Mercia

Author: William Vincent

Revision History

<i>Version</i>	<i>Date Issued</i>	<i>Reason for Issue</i>	<i>Issued by</i>	<i>QA Check</i>
1	17/07/2019	Report provided in support of planning application	 <i>William Vincent</i>	 <i>Michael Woodbridge</i>

Contents

1. Project Overview	1
1.1. Introduction	1
1.2. Description of Site	1
1.3. Client Brief	1
2. Improvement Measures	2
2.1. Assessment Methodology	2
2.2. Design Philosophy	3
2.3. Specification Improvements	4
2.3.1. Product Improvements	4
2.3.2. Fabric Improvements	5
2.3.3. Hi-Therm Lintels	6
2.3.4. Waste Water Heat Recovery Systems (WWHRS)	6
2.4. Low and Zero Carbon Technologies	7
2.4.1. Photovoltaic (PV) Cells	7
2.4.2. Solar Hot Water (SHW)	8
2.4.3. Air Source Heat Pumps (ASHP)	9
2.4.4. Ground Source Heat Pumps (GSHP)	9
2.4.5. Biomass Heating Systems	10
2.4.6. Wind Turbines	10
2.4.7. Comparison	11
3. Evaluation	12
3.1. Conclusion	12
Appendix A	13
Appendix B	14
Appendix C	16
Appendix D	21

1. Project Overview

1.1. Introduction

This energy and carbon compliance study was prepared by Environmental Economics Ltd on behalf of Barratt Mercia. The report assesses measures to reduce the energy demand and carbon emissions for the domestic housing on site through an improvement in materials and products used.

1.2. Description of Site

The site consists of 280 plots. These units comprise a range of detached, semi-detached and terraced dwellings.

The proposed site location/boundary for the whole site is shown in Appendix A.

This report addresses a domestic development being undertaken by Barratt Mercia, and does not include any further proposals for subsequent developments or non-residential parcels.

1.3. Client Brief

The planning authority for this site is Cherwell District Council. In order to achieve compliance with Part L 2013 Building Regulations the design carbon emissions (DER) do not surpass the target carbon emissions (TER), and that the fabric energy efficiency of the design (DFEE) is either equivalent or better than the target fabric energy efficiency (TFEE).

2. Improvement Measures

2.1. Assessment Methodology

Environmental Economics have modelled the proposed dwellings using NHER Plan Assessor software. The software provides a number of outputs which can be used to assess and compare the improvements from any number of build specifications in terms of:

- *Building regulations compliance*
- *Energy usage per year (kWh/annum)*
- *Carbon emissions as a measure of building regulations compliance (kg CO₂/m²/year)*
- *Energy costs per year (£/annum)*
- *More detailed breakdowns by end use (space heating, water heating, cooking, lighting, appliances)*
- *Code for Sustainable Homes compliance*
- *Effective air change rate*

Each of these outputs can be used in different ways to analyse the performance of the dwelling. The total regulated carbon emissions for each property is based upon:

- *Space heating*
- *Water heating*
- *Electricity for pumps and fans*
- *Electricity for lighting*

Two models were created in order to calculate the different carbon emissions from the specification improvements. The total emission of carbon for the site is calculated for each of the models, and then the difference used to establish the level of improvement. In order to achieve this representative house types have been utilised.

The emissions calculation for the space and water heating, as well as the electricity for pumps, fans and lighting were all assessed using the Standard Assessment Procedure (SAP 2012) through version 6 of the NHER Plan Assessor software. An example SAP worksheet is shown in Appendix C.

2.2. Design Philosophy

Barratt Mercia has upgraded a number of elements from a standard build specification in order to improve energy efficiency across the development. The site adopts the good design principles endorsed and promoted by The Zero Carbon Hub, the construction industries' key advisors and partners with the Governments Communities and Local Government Department. This guidance follows the general good principles of energy efficiency as the industry moves towards zero carbon. The principles are illustrated in figure 1 below.

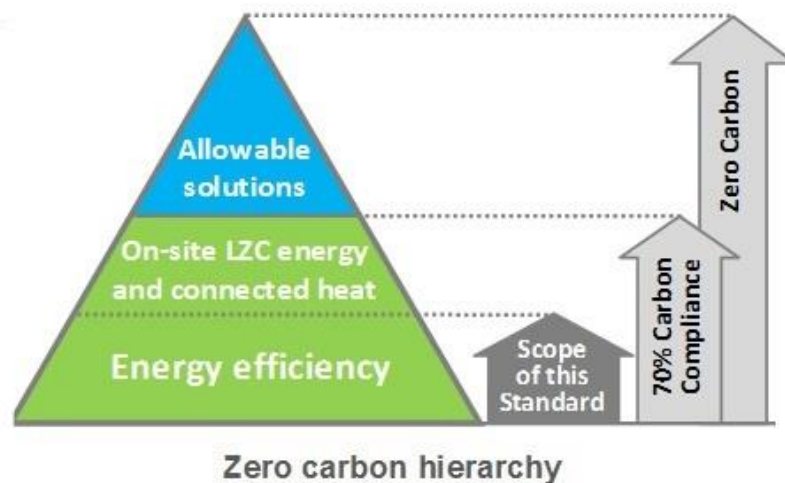


Figure 1

In order to reduce the residual carbon emissions a number of improvements were made to the standard material and product specification. These improvements include:

- *Upgraded heating and hot water controls*
- *Delayed start thermostat*
- *Design air permeability of 5.01m³/hr/m²*
- *Bespoke thermal bridging details*

2.3. Specification Improvements

In order to improve energy efficiency the products and the fabric of the dwellings was improved from basic compliance with Part L1A 2013 to an enhanced specification.

2.3.1. Product Improvements

The systems used in a property to supply hot water and heating, as well as control it, are important to the overall energy demand of a property. The 2013 Building Regulations state that all systems and their controls must adhere to the minimum standards shown in Domestic Heating Compliance Guide.

For a mains gas fired system the minimum boiler efficiency required is 86%. Barratt Mercia intends to use Ideal Logic condensing boilers throughout the site for both combination and cylinder based systems. These boilers achieve a SAP 2012 rated efficiency of at least 89% and are recommended by the Energy Saving Trust.

Where installed, hot water cylinders can lose a significant amount of energy. In order to minimise this energy loss and corresponding carbon emissions Barratt Mercia will utilise Kingspan Tribune Cylinders which have higher levels of insulation in comparison to typical hot water cylinders.

Finally 100% Low-E lighting fixtures shall be fitted to all properties.

2.3.2. Fabric Improvements

The building fabric for all dwellings was improved from basic compliance with Part L1A 2013 to an enhanced specification. These fabric improvements reduce the space heating requirement upon a property. The improvements have been made through a combination of upgraded materials and increased insulation thicknesses. Enhanced glazing with a larger transmittance factor allowing for increased solar gains will also be used. Changes to the U-Value of external elements are shown in table 1 below.

<i>Element</i>	<i>Minimum Standard</i>	<i>Improved Specification</i>	
-	<i>W/m²k</i>	<i>Description</i>	<i>W/m²k</i>
Walls	0.30	50mm Alreflex Platinum Cavity	0.27
Roof	0.20	400mm Mineral Wool Horizontal Ceiling, Loft Space	0.11
		Flat Roof	0.17
Floors	0.25	150mm TE Platinum Beam & Block Floor	0.14 - 0.15
Doors	2.00	Double glazed Low-E, u-PVC frame	1.00 – 1.70
Glazing	2.00	Double glazed Low-E, u-PVC frame	1.41

Table 1

As improvements are made to the thermal conductivity of main elements, thermal bridging and air permeability becomes increasingly significant in the overall fabric performance. Barratt Merciautilise bespoke thermal bridging designs assessed by H&H Celcon, which achieve much lower heat loss levels in comparison with standard practice.

As a result of following these junction details and focusing on build quality air permeability will also decrease. A target air pressure rating of 5.01m³/hr.m² has been set for all houses on site which is a 50% improvement on the maximum allowable rating in the 2013 Building Regulations.

2.3.3. Hi-Therm Lintels

As the latest set of building regulations have incorporated a Target Fabric Energy Efficiency (TFEE) standard for all new houses, some of the bespoke thermal bridging details would not be sufficient to achieve the latter.

Since a significant amount of heating energy is lost through the dwellings lintels, Barratt Mercia intend to use IG Hi-Therm lintels on this site. IG Hi-Therm lintels achieve a lower linear thermal transmittance (Psi value) of 0.05W/mK, in comparison to the normal IG lintels which achieve a Psi value of 0.23W/mK. More details are shown in Appendix D.

2.3.4. Waste Water Heat Recovery Systems (WWHRS)

WWHRS recovers heat from the warm waste water as it passes through a double walled heat exchanger, before going in the drainage system. The heat is transferred to the mains cold water supply, which is then supplied to the mains cold feed to the shower and/or a combination boiler or a hot water storage cylinder.

This process makes a significant reduction to the energy demand for providing hot water. The energy recovered depends on the temperature of the cold water feed to the dwelling, which varies by month, and the number of systems that are installed. The WWHRS is installed vertically below the point of demand, i.e. within the waste ducting below the shower or bath. A simple schematic of a WWHRS is shown in figure 2.

The housetypes with WWHRS are H417--7 and H456--7.

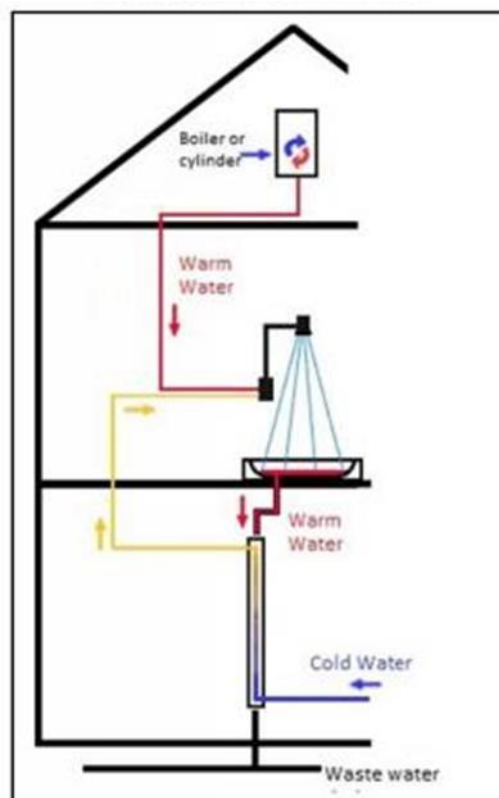


Figure 2

2.4. Low and Zero Carbon Technologies

2.4.1. Photovoltaic (PV) Cells

The efficiency of PV cells has improved rapidly over the last 15 years. This has made a previously uneconomical technology an increasingly viable solution to rising energy costs and demand. The cells can be produced in a variety of formats but are typically manufactured as a panel or a roof tile for domestic housing applications.

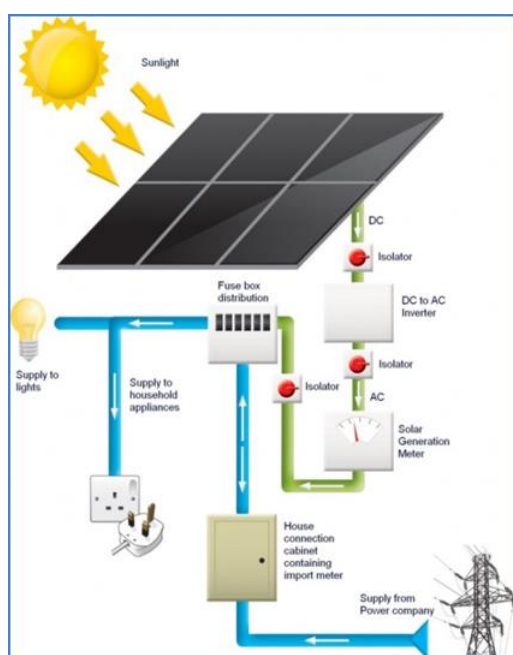


Figure 3

The PV system typically produces direct current (DC) which is then sent through an inverter to supply the house with electricity. If a greater amount of electricity is produced than used by the household, this extra can be sold back to the national grid, as can be seen in figure 3.

A PV cell is assessed on its peak power rating. This is tested by exposing the cell to the equivalent of full solar radiation and measuring the power output. The peak power is input into the NHER software as well as the physical attributes of the installation such as pitch, orientation and over-shading. A total energy saving per year can then be calculated through SAP for the PV installation. This is then offset against the electricity energy demand for the house.

2.4.2. Solar Hot Water (SHW)

SHW systems provide hot water to a household usually in conjunction with a conventional boiler and cylinder system. Because of this they are best suited to houses with a need for a cylinder hot water system rather than a combi boiler.

There are two main SHW systems; evacuated tubes and flat plate collectors. Evacuated tubes are more efficient at transferring solar irradiation to the fluid although flat plate collectors are considered to be better aesthetically and to install. An example of the latter can be seen in figure 4.



Figure 4

The final energy contribution to the household, calculated through SAP, is based on a number of factors:

- *Pitch, orientation and over-shading*
- *Heat absorption efficiency for the collector*
- *Average hot water usage of the dwelling*

The majority of the energy savings will be made in the hot water demand for the dwelling however, adding a SHW system will impact upon other energy demands.

2.4.3. Air Source Heat Pumps (ASHP)

ASHP provide heating and hot water to a home through thermal energy gathered from air outside the dwelling. Systems can be designed to work in conjunction with a boiler system but in the case of energy efficient new builds it is possible for an ASHP unit to provide 100% of the heating and hot water demand.



Figure 5

The thermal performance of the unit depends on the outside temperature as well as the unit's Coefficient of Performance. This is the ratio of thermal energy produced to energy used. A typical value for this would be around 3.5, meaning that for every 1kW of electricity consumed the unit would provide 3.5kW of thermal energy to the household. This efficiency leads to large carbon and energy savings for both space and water heating.

ASHP are assessed by their power output and the size of unit chosen depends on the demand from the household. An example external unit can be seen above in figure 5. The units with a larger power output can provide a larger amount of hotter water even in colder climates

2.4.4. Ground Source Heat Pumps (GSHP)

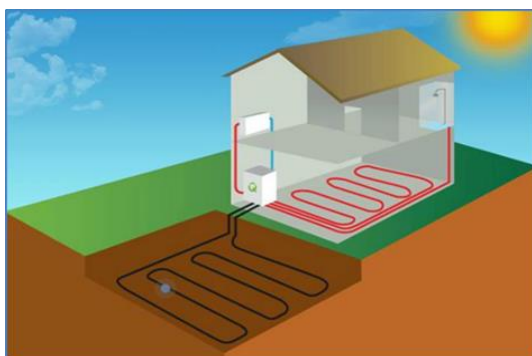


Figure 6

GSHP provide heating and hot water to a dwelling through geothermal effects. A GSHP system would offset the energy demand from the main space heating. There is, however, an additional electricity demand for the pump and control system. This would reduce energy savings from the installation.

GSHP are expensive to install and rely on having appropriate ground conditions and suitable space around the dwelling for the pipe looping. Energy savings are dependent upon the type of system being replaced and the way the system is operated by the homeowner. A typical system can be seen above in figure 6.

2.4.5. Biomass Heating Systems

Biomass heating systems burn fuels, considered carbon neutral, to heat the water required for a dwelling. There are a large variety of systems available and choice depends on the type of fuel to be burned and the level of automation.



Figure 7

The system would offset the energy demand from the hot water and main space heating. However, biomass systems typically require a large amount of maintenance and monitoring. An example system can be seen in figure 7.

The savings from such a system, in terms of CO₂ and money, depends upon what it is replacing. The savings are greatest when replacing an electrical hot water system but are considerably less for replacing mains gas.

2.4.6. Wind Turbines



Figure 8

Wind turbines provide electricity directly to a dwelling. They can be added to a property in two ways: pole mounted or building mounted. The pole mounted systems are free standing and therefore require enough space around them to allow for the construction and maintenance of the structure, as well as to allow for efficient operation. The building mounted systems have a lower power output but do not require additional structures, as can be seen in figure 8.

The energy produced from a wind turbine is heavily dependent upon the surrounding landscape. The energy saved will be offset against the electricity usage of the dwelling.

2.4.7. Comparison

SHW can be easily incorporated into new build house designs and has the potential to reduce the energy demand from hot water considerably. The site layout has taken into account passive solar gains and therefore is suitable to benefit fully from solar technology.

The product and installation cost make ASHP an expensive option. There is also a degree of uncertainty about the energy saving that can be obtained from the system as it requires diligent operation. The same can be said of GSHP, as well as the fact that additional extensive ground work is required in order to make use of the system.

Biomass hot water systems are more suited to the replacement of inefficient, carbon heavy systems such as electrical immersion heaters. The requirement of maintenance and monitoring makes it unsuitable for large scale new build developments

The density of the site is a major restriction on the potential energy that could be generated from wind turbines. Surrounding houses and the inner city location would restrict wind speeds. In order to obtain the energy savings required, larger, more expensive pole mounted systems would be required.

The solution of PV panel systems isn't required to meet the reduction, as the fabric performance is sufficient to meet the required targets.

3. Evaluation

3.1. Conclusion

The tables presented in Appendix B shows the results of the reduction in carbon and energy reduction across the site.

The total carbon emissions target of the Part L 2013 compliance model is 496,721kgCO₂/Annum. The total carbon emission for the actual model with the improved specification that would achieve Part L 2013 compliance is 474,782kgCO₂/Annum. This results in a 21,939kgCO₂/Annum reduction in energy demand, which achieves a 4.42% saving across the site.

The TFEE of the Part L 2013 compliance model is 1,566.2MWh/Annum. The DFEE for the actual model with the improved specification that would achieve Part L 2013 compliance is 1,387.7MWh/Annum. This results in a 178.5MWh/Annum reduction in energy demand, which achieves an 11.4% saving across the site.

Approved for Release



Date: 17/07/2019

[illegible]

Appendix B

Carbon Reduction Study
White Post Road

Client:	Barratt Mercia					
Project:	White Post Road					
Report:	Carbon Emissions Reduction from Fabric and General Specification Improvements					
House Type/ Plot Number	Standard Regulatory Model CO ₂ Emissions Rate	Improved Model CO ₂ Emissions Rate	Improvement over Regulatory Model	SAP Floor Area	Number of Plots	Annual Carbon Emissions from Improved Model
-	kgCO ₂ /m ² .yr	kgCO ₂ /m ² .yr	%	m ²	-	kgCO ₂ /yr
Alderney Detached	17.01	15.75	7.4%	114	16	28,693
Chester Detached	18.17	17.63	3.0%	94	13	21,640
Ennerdale Detached	18.57	17.60	5.2%	85	9	13,477
H403-C7 Detached	17.61	16.60	5.7%	101	9	15,032
H417---7 Detached	16.33	15.23	6.7%	135	10	20,488
H418---7 Detached	17.12	16.63	2.9%	137	9	20,541
H421---7 Detached	15.40	15.27	0.8%	164	2	5,023
H455---7 Detached	16.26	16.16	0.6%	127	9	18,482
H456---7 Detached	16.16	15.63	3.3%	140	15	32,866
H469-X7 Detached	15.82	15.69	0.8%	143	14	31,412
H577---7 Detached	14.97	14.64	2.2%	181	10	26,554
H588---7 Detached	15.08	14.81	1.8%	184	8	21,752
Lutterworth Det BB	18.50	17.73	4.2%	92	1	1,623
Maidstone Semi-Detached	18.44	17.18	6.8%	77	29	38,360
P341-E-7 Semi-Detached	17.92	16.72	6.7%	93	4	6,224
P382-E-7 Semi-Detached	18.70	17.53	6.3%	77	21	28,456
Radleigh Detached	16.63	16.50	0.8%	121	17	33,867
SH50 Semi-Detached	19.95	18.98	4.9%	70	8	10,584
SH52 Semi-Detached	18.23	17.01	6.7%	86	19	27,790
SH55 Semi-Detached	17.56	16.54	5.8%	89	1	1,472
Type 50 Semi-Detached	19.60	18.54	5.4%	70	12	15,509
Type 52 Semi-Detached	17.91	16.62	7.2%	86	28	40,039
Type 75 Semi-Detached	22.39	21.52	3.9%	43	16	14,897
Total Annual Carbon Emissions (kgCO₂/yr)						474,782
Floor Area Weighted Average Improvement (%)						4.4%
Notes						
#1: Calculated by SAP2012 to include total energy demand for space heating, hot water, lighting, pumps and fans.						

*Energy Demand Reduction Study
White Post Road*

Client:	Barratt Mercia					
Project:	White Post Road					
Report:	Energy Demand Reduction from Fabric and General Specification Improvements					
House Type/ Plot Number	Standard Regulatory Model Fabric Efficiency	Improved Model Fabric Efficiency	Improvement over Regulatory Model	SAP Floor Area	Number of Plots	Annual Energy Demand from Improved Model
-	kWh/m ² .yr	kWh/m ² .yr	%	m ²	-	kWh/yr
Alderney Detached	54.48	48.51	11.0%	114	16	88,368
Chester Detached	54.23	48.79	10.0%	94	13	59,881
Ennerdale Detached	55.70	50.90	8.6%	85	9	38,964
H403-C7 Detached	53.20	48.10	9.6%	101	9	43,547
H417---7 Detached	57.52	51.04	11.3%	135	10	68,662
H418---7 Detached	61.11	52.12	14.7%	137	9	64,379
H421---7 Detached	56.39	49.83	11.6%	164	2	16,393
H455---7 Detached	55.50	49.44	10.9%	127	9	56,542
H456---7 Detached	56.19	50.13	10.8%	140	15	105,408
H469-X7 Detached	55.47	49.21	11.3%	143	14	98,521
H577---7 Detached	55.88	48.71	12.8%	181	10	88,357
H588---7 Detached	56.58	49.39	12.7%	184	8	72,549
Lutterworth Det BB	56.12	50.69	9.7%	92	1	4,640
Maidstone Semi-Detached	50.77	44.62	12.1%	77	29	99,627
P341-E-7 Semi-Detached	53.01	46.33	12.6%	93	4	17,241
P382-E-7 Semi-Detached	52.90	46.98	11.2%	77	21	76,263
Radleigh Detached	55.34	48.93	11.6%	121	17	100,426
SH50 Semi-Detached	56.71	51.37	9.4%	70	8	28,654
SH52 Semi-Detached	51.98	46.38	10.8%	86	19	75,760
SH55 Semi-Detached	49.74	45.05	9.4%	89	1	4,010
Type 50 Semi-Detached	53.29	47.35	11.1%	70	12	39,606
Type 52 Semi-Detached	49.77	43.98	11.6%	86	28	105,920
Type 75 Semi-Detached	54.74	49.08	10.3%	43	16	33,974
Total Annual Energy Requirements (kWh/yr)						1,387,693
Floor Area Weighted Average Improvement (%)						11.4%
Notes						
#1: Calculated by SAP2012 to include total energy demand for space heating, hot water, lighting, pumps and fans.						

Appendix C

DER Worksheet
Design - Draft

This design submission has been carried out using Approved SAP software. It has been prepared from plans and specifications and may not reflect the property as constructed.

Assessor name	5982 Hazel Black	Assessor number	5982
Client		Last modified	04/05/2019
Address	XX XX, XX, XX		

1. Overall dwelling dimensions

	Area (m ²)	Average storey height (m)	Volume (m ³)
Lowest occupied	56.93 (1a) x	2.33 (2a) =	132.65 (3a)
+1	56.93 (1b) x	2.55 (2b) =	145.17 (3b)
Total floor area	(1a) + (1b) + (1c) + (1d)...(1n) = 113.86 (4)		
Dwelling volume	(3a) + (3b) + (3c) + (3d)...(3n) = 277.82 (5)		

2. Ventilation rate

		m ³ per hour
Number of chimneys	0 x 40 =	0 (6a)
Number of open flues	0 x 20 =	0 (6b)
Number of intermittent fans	3 x 10 =	30 (7a)
Number of passive vents	0 x 10 =	0 (7b)
Number of flueless gas fires	0 x 40 =	0 (7c)

Infiltration due to chimneys, flues, fans, PSVs	(6a) + (6b) + (7a) + (7b) + (7c) = 30	÷ (5) = 0.11 (8)
---	---------------------------------------	------------------

If a pressurisation test has been carried out or is intended, proceed to (17), otherwise continue from (9) to (16)

Air permeability value, q50, expressed in cubic metres per hour per square metre of envelope area	5.01 (17)
---	-----------

If based on air permeability value, then (18) = [(17) ÷ 20] + (8), otherwise (18) = (16)	0.36 (18)
--	-----------

Number of sides on which the dwelling is sheltered	2 (19)
--	--------

Shelter factor	1 - [0.075 x (19)] = 0.85 (20)
----------------	--------------------------------

Infiltration rate incorporating shelter factor	(18) x (20) = 0.30 (21)
--	-------------------------

Infiltration rate modified for monthly wind speed:

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Monthly average wind speed from Table U2	5.10	5.00	4.90	4.40	4.30	3.80	3.80	3.70	4.00	4.30	4.50	4.70

Wind factor (22)m ÷ 4	1.28	1.25	1.23	1.10	1.08	0.95	0.95	0.93	1.00	1.08	1.13	1.18
-----------------------	------	------	------	------	------	------	------	------	------	------	------	------

Adjusted infiltration rate (allowing for shelter and wind factor) (21) x (22a)m	0.39	0.38	0.37	0.34	0.33	0.29	0.29	0.28	0.30	0.33	0.34	0.36
---	------	------	------	------	------	------	------	------	------	------	------	------

Calculate effective air change rate for the applicable case:

If mechanical ventilation: air change rate through system	N/A (23a)
---	-----------

If balanced with heat recovery: efficiency in % allowing for in-use factor from Table 4h	N/A (23c)
--	-----------

d) natural ventilation or whole house positive input ventilation from loft	0.58	0.57	0.57	0.56	0.55	0.54	0.54	0.54	0.55	0.55	0.56	0.56
--	------	------	------	------	------	------	------	------	------	------	------	------

Effective air change rate - enter (24a) or (24b) or (24c) or (24d) in (25)



0.58	0.57	0.57	0.56	0.55	0.54	0.54	0.54	0.55	0.55	0.56	0.56	(25)
------	------	------	------	------	------	------	------	------	------	------	------	------

3. Heat losses and heat loss parameter

Element	Gross area, m ²	Openings m ²	Net area A, m ²	U-value W/m ² K	A x U W/K	κ-value, kJ/m ² .K	A x κ, kJ/K						
Window			19.85	x 1.33	= 26.49		(27)						
Door			1.93	x 1.00	= 1.93		(26)						
Ground floor			56.93	x 0.14	= 7.97		(28a)						
External wall			138.79	x 0.27	= 37.47		(29a)						
Roof			56.93	x 0.11	= 6.26		(30)						
Total area of external elements ΣA, m ²			274.43				(31)						
Fabric heat loss, W/K = Σ(A x U)					(26)...(30) + (32) =	80.13	(33)						
Heat capacity Cm = Σ(A x κ)					(28)...(30) + (32) + (32a)...(32e) =	N/A	(34)						
Thermal mass parameter (TMP) in kJ/m ² K						120.30	(35)						
Thermal bridges: Σ(L x Ψ) calculated using Appendix K						8.81	(36)						
Total fabric heat loss					(33) + (36) =	88.94	(37)						
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
Ventilation heat loss calculated monthly 0.33 x (25)m x (5)	52.76	52.49	52.23	50.99	50.76	49.68	49.68	49.48	50.10	50.76	51.23	51.72	(38)
Heat transfer coefficient, W/K (37)m + (38)m	141.70	141.43	141.16	139.93	139.70	138.62	138.62	138.42	139.03	139.70	140.16	140.65	
	Average = Σ(39)1...12/12 =											139.93	(39)
Heat loss parameter (HLP), W/m ² K (39)m ÷ (4)	1.24	1.24	1.24	1.23	1.23	1.22	1.22	1.22	1.22	1.23	1.23	1.24	
	Average = Σ(40)1...12/12 =											1.23	(40)
Number of days in month (Table 1a)	31.00	28.00	31.00	30.00	31.00	30.00	31.00	31.00	30.00	31.00	30.00	31.00	(40)

4. Water heating energy requirement

Assumed occupancy, N													2.84	(42)	
Annual average hot water usage in litres per day $V_{d,average} = (25 \times N) + 36$													101.56	(43)	
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec			
Hot water usage in litres per day for each month $V_{d,m} = \text{factor from Table 1c} \times (43)$															
	111.71	107.65	103.59	99.53	95.46	91.40	91.40	95.46	99.53	103.59	107.65	111.71			
													$\Sigma(44)_{1...12} =$	1218.69	(44)
Energy content of hot water used = $4.18 \times V_{d,m} \times n_m \times T_m / 3600$ kWh/month (see Tables 1b, 1c 1d)															
	165.67	144.89	149.52	130.35	125.08	107.93	100.01	114.77	116.14	135.35	147.74	160.44			
													$\Sigma(45)_{1...12} =$	1597.90	(45)
Distribution loss $0.15 \times (45)m$															
	24.85	21.73	22.43	19.55	18.76	16.19	15.00	17.22	17.42	20.30	22.16	24.07		(46)	
Water storage loss calculated for each month $(55) \times (41)m$															
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		(56)	
If the vessel contains dedicated solar storage or dedicated WWHRs $(56)m \times [(47) - V_s] \div (47)$, else (56)															
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		(57)	
Primary circuit loss for each month from Table 3															
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		(59)	
Combi loss for each month from Table 3a, 3b or 3c															
	14.15	12.77	14.12	13.62	14.04	13.55	13.98	14.02	13.59	14.08	13.67	14.14		(61)	
Total heat required for water heating calculated for each month $0.85 \times (45)m + (46)m + (57)m + (59)m + (61)m$															

URN: Alderney Detached version 1
 NHER Plan Assessor version 6.2.3
 SAP version 9.92

179.82	157.67	163.63	143.98	139.12	121.48	113.99	128.79	129.73	149.43	161.41	174.58	(62)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

Solar DHW input calculated using Appendix G or Appendix H

0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	(63)
------	------	------	------	------	------	------	------	------	------	------	------	------

Output from water heater for each month (kWh/month) (62)m + (63)m

179.82	157.67	163.63	143.98	139.12	121.48	113.99	128.79	129.73	149.43	161.41	174.58	
$\Sigma(64)1...12 =$											1763.63	(64)

Heat gains from water heating (kWh/month) $0.25 \times [0.85 \times (45)m + (61)m] + 0.8 \times [(46)m + (57)m + (59)m]$

58.62	51.37	53.24	46.75	45.10	39.27	36.75	41.67	42.01	48.52	52.54	56.88	(65)
-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

5. Internal gains

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Metabolic gains (Table 5)

141.81	141.81	141.81	141.81	141.81	141.81	141.81	141.81	141.81	141.81	141.81	141.81	(66)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

Lighting gains (calculated in Appendix L, equation L9 or L9a), also see Table 5

25.36	22.52	18.31	13.87	10.36	8.75	9.45	12.29	16.50	20.94	24.45	26.06	(67)
-------	-------	-------	-------	-------	------	------	-------	-------	-------	-------	-------	------

Appliance gains (calculated in Appendix L, equation L13 or L13a), also see Table 5

276.99	279.86	272.62	257.20	237.74	219.44	207.22	204.35	211.59	227.01	246.47	264.77	(68)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

Cooking gains (calculated in Appendix L, equation L15 or L15a), also see Table 5

37.18	37.18	37.18	37.18	37.18	37.18	37.18	37.18	37.18	37.18	37.18	37.18	(69)
-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Pump and fan gains (Table 5a)

3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	(70)
------	------	------	------	------	------	------	------	------	------	------	------	------

Losses e.g. evaporation (Table 5)

-113.44	-113.44	-113.44	-113.44	-113.44	-113.44	-113.44	-113.44	-113.44	-113.44	-113.44	-113.44	(71)
---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	------

Water heating gains (Table 5)

78.79	76.44	71.56	64.93	60.62	54.55	49.39	56.00	58.35	65.22	72.97	76.45	(72)
-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Total internal gains (66)m + (67)m + (68)m + (69)m + (70)m + (71)m + (72)m

449.68	447.37	431.04	404.54	377.26	351.28	334.61	341.18	354.98	381.72	412.44	435.82	(73)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

6. Solar gains

	Access factor Table 6d	Area m ²	Solar flux W/m ²	g specific data or Table 6b	FF specific data or Table 6c	Gains W	
NorthEast	0.77	x 4.68	x 11.28	x 0.9 x 0.71	x 0.70	= 18.19	(75)
SouthEast	0.77	x 5.27	x 36.79	x 0.9 x 0.71	x 0.70	= 66.78	(77)
SouthWest	0.77	x 6.75	x 36.79	x 0.9 x 0.71	x 0.70	= 85.54	(79)
NorthWest	0.77	x 3.15	x 11.28	x 0.9 x 0.71	x 0.70	= 12.24	(81)

Solar gains in watts $\Sigma(74)m...(82)m$

182.75	321.40	466.60	623.14	739.04	751.76	717.26	628.03	520.38	362.46	220.74	155.21	(83)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

Total gains - internal and solar (73)m + (83)m

632.43	768.77	897.64	1027.68	1116.30	1103.05	1051.87	969.21	875.36	744.17	633.17	591.03	(84)
--------	--------	--------	---------	---------	---------	---------	--------	--------	--------	--------	--------	------

7. Mean internal temperature (heating season)

Temperature during heating periods in the living area from Table 9, Th1(°C)

21.00	(85)
-------	------

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Utilisation factor for gains for living area n1,m (see Table 9a)

0.98	0.97	0.94	0.89	0.79	0.65	0.52	0.57	0.77	0.92	0.97	0.98	(86)
------	------	------	------	------	------	------	------	------	------	------	------	------

Mean internal temp of living area T1 (steps 3 to 7 in Table 9c)

18.63	18.92	19.36	19.93	20.43	20.77	20.91	20.89	20.61	19.95	19.18	18.57	(87)
-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Temperature during heating periods in the rest of dwelling from Table 9, Th2(°C)

19.88	19.89	19.89	19.90	19.90	19.91	19.91	19.91	19.90	19.90	19.90	19.89	(88)		
Utilisation factor for gains for rest of dwelling n2,m														
0.98	0.96	0.93	0.86	0.75	0.58	0.41	0.46	0.71	0.90	0.96	0.98	(89)		
Mean internal temperature in the rest of dwelling T2 (follow steps 3 to 7 in Table 9c)														
16.72	17.14	17.79	18.60	19.28	19.71	19.85	19.83	19.53	18.64	17.53	16.65	(90)		
Living area fraction										Living area ÷ (4) =			0.14	(91)
Mean internal temperature for the whole dwelling fLA x T1 +(1 - fLA) x T2														
16.99	17.39	18.01	18.79	19.44	19.86	20.01	19.98	19.68	18.83	17.77	16.92	(92)		
Apply adjustment to the mean internal temperature from Table 4e where appropriate														
16.84	17.24	17.86	18.64	19.29	19.71	19.86	19.83	19.53	18.68	17.62	16.77	(93)		

8. Space heating requirement

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec		
Utilisation factor for gains, η_m														
	0.96	0.94	0.90	0.83	0.72	0.56	0.41	0.45	0.68	0.87	0.94	0.97	(94)	
Useful gains, $\eta_m G_m$, W (94)m x (84)m														
	609.17	723.21	810.01	854.26	802.31	619.73	426.88	440.90	596.92	645.51	598.16	572.52	(95)	
Monthly average external temperature from Table U1														
	4.30	4.90	6.50	8.90	11.70	14.60	16.60	16.40	14.10	10.60	7.10	4.20	(96)	
Heat loss rate for mean internal temperature, L_m , W [(39)m x ((93)m - (96)m)]														
	1777.39	1745.51	1603.92	1362.48	1060.49	708.37	451.35	475.35	755.32	1128.16	1474.23	1768.15	(97)	
Space heating requirement, kWh/month $0.024 \times ((97)m - (95)m) \times (41)m$														
	869.15	686.99	590.67	365.92	192.08	0.00	0.00	0.00	0.00	359.09	630.77	889.55	(98)	
										$\Sigma(98)1...5, 10...12 =$				
										4584.22				
Space heating requirement kWh/m ² /year										$(98) \div (4) =$				(99)
										40.26				

9a. Energy requirements - individual heating systems including micro-CHP

Space heating

Fraction of space heat from secondary/supplementary system (table 11)

0.00

(201)

Fraction of space heat from main system(s)

1 - (201) =

1.00

(202)

Fraction of space heat from main system 2

0.00

(202)

Fraction of total space heat from main system 1

(202) x [1 - (203)] =

1.00

(204)

Fraction of total space heat from main system 2

(202) x (203) =

0.00

(205)

Efficiency of main system 1 (%)

90.50

(206)

JanFebMarAprMayJunJulAugSepOctNovDec

Space heating fuel (main system 1), kWh/month

960.39759.10652.67404.33212.250.000.000.000.00396.78696.99982.93

Σ(211)1...5, 10...12 =

5065.44

(211)

Water heating

Efficiency of water heater

89.9389.8889.7989.5789.1387.3087.3087.3087.3089.5489.8389.96

(217)

Water heating fuel, kWh/month

199.95175.41182.25160.74156.09139.15130.57147.52148.60166.90179.69194.07

Σ(219a)1...12 =

1980.94

(219)

Annual totals

Space heating fuel - main system 1

5065.44

Water heating fuel

1980.94

Electricity for pumps, fans and electric keep-hot (Table 4f)

central heating pump or water pump within warm air heating unit	30.00	(230c)
boiler flue fan	45.00	(230e)
Total electricity for the above, kWh/year	75.00	(231)
Electricity for lighting (Appendix L)	447.78	(232)
Total delivered energy for all uses	(211)...(221) + (231) + (232)...(237b) = 7569.16	(238)

10a. Fuel costs - individual heating systems including micro-CHP

	Fuel kWh/year		Fuel price		Fuel cost £/year	
Space heating - main system 1	5065.44	x	3.48	x 0.01 =	176.28	(240)
Water heating	1980.94	x	3.48	x 0.01 =	68.94	(247)
Pumps and fans	75.00	x	13.19	x 0.01 =	9.89	(249)
Electricity for lighting	447.78	x	13.19	x 0.01 =	59.06	(250)
Additional standing charges					120.00	(251)
Total energy cost			(240)...(242) + (245)...(254) =		434.17	(255)

11a. SAP rating - individual heating systems including micro-CHP

Energy cost deflator (Table 12)	0.42	(256)
Energy cost factor (ECF)	1.15	(257)
SAP value	83.99	
SAP rating (section 13)	84	(258)
SAP band	B	

12a. CO₂ emissions - individual heating systems including micro-CHP

	Energy kWh/year		Emission factor kg CO ₂ /kWh		Emissions kg CO ₂ /year	
Space heating - main system 1	5065.44	x	0.216	=	1094.13	(261)
Water heating	1980.94	x	0.216	=	427.88	(264)
Space and water heating			(261) + (262) + (263) + (264) =		1522.02	(265)
Pumps and fans	75.00	x	0.519	=	38.93	(267)
Electricity for lighting	447.78	x	0.519	=	232.40	(268)
Total CO ₂ , kg/year			(265)...(271) =		1793.34	(272)
Dwelling CO ₂ emission rate			(272) ÷ (4) =		15.75	(273)
EI value					84.87	
EI rating (section 14)					85	(274)
EI band					B	

13a. Primary energy - individual heating systems including micro-CHP

	Energy kWh/year		Primary factor		Primary Energy kWh/year	
Space heating - main system 1	5065.44	x	1.22	=	6179.83	(261)
Water heating	1980.94	x	1.22	=	2416.74	(264)
Space and water heating			(261) + (262) + (263) + (264) =		8596.58	(265)
Pumps and fans	75.00	x	3.07	=	230.25	(267)
Electricity for lighting	447.78	x	3.07	=	1374.70	(268)
Primary energy kWh/year					10201.52	(272)
Dwelling primary energy rate kWh/m ² /year					89.60	(273)

Appendix D



Cavity Wall

Cavity widths from 90mm to 165mm

OUTER LEAF	INNER LEAF
102mm	100mm

If lintels are required to carry loads not indicated on the load tables, please contact IG's Technical Department.


LINTEL HOTLINE
01633 486486

Fax Back Enquiry Forms are also available for download.
www.iglintels.com/technical

IG Fastrack CAD Database is accessible from iglintels.com

Hi-Therm Lintel

IG leads the way with the development of a completely unique lintel range to address the thermal requirements of new building regulations.

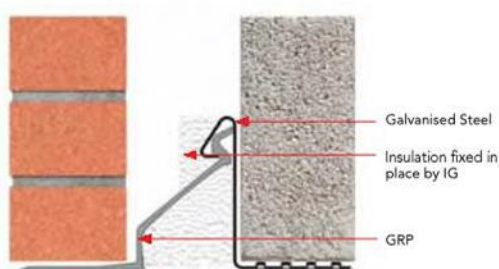

Psi 0.05 W/m·K

Building regulations require that lintels should be assessed for their effect on the thermal performance of a building. The thermal performance of a lintel is expressed in terms of Psi Values (Ψ) i.e. linear thermal transmittance.

Psi COMPARISON CHART

To help understand the immense thermal benefits of the Hi-Therm Lintel it must be compared to other lintel types.

Lintel type comparison	Values
IG Hi-Therm Lintel	0.05 W/m·K
Typical IG Lintel	0.23 W/m·K
Non-plated Steel Lintel (default)	0.3 W/m·K
Plated Steel Lintel (default)	0.5 W/m·K



THERMAL
PERFORMANCE
TESTING

Testing of IG's Hi-Therm Lintel was carried out by the BRE (Building Research Establishment) using Physibel's thermal analysis software TRISCO which complies with BS EN ISO 10211-1. The modeling follows the requirements of the BRE conventions document BR497.

KEY BENEFITS

- Up to 5 times more thermally efficient than a steel cavity wall lintel, Hi-Therm outperforms other lintels.
- The significant reductions in thermal bridging due to the GRP component will assist in the building design process to achieve compliance with Part L and The Code for Sustainable Homes.
- The use of Hi-Therm will make a significant contribution to a buildings performance in respect of the Fabric Energy Efficiency Standards (FEES).
- Outperforms Stainless Steel on price and corrosion resistance.
- Hi-Therm has achieved the 1 hour fire resistance test as carried out by Exova Warringtonfire utilising the heating conditions of BS EN 1363-1 1999.

DESIGN FEATURES

- Patented GRP and Galvanised Steel hybrid design.
- Galvanised steel is used to support the heavier load on the inner leaf of the cavity wall.
- Profiled CFC free insulation ensures the continuity of insulation.

DAMP PROOFING

Not required on Hi-Therm lintels.
*Check severe exposure.

2. Energy Statement Addendum – June 2020

24th June 2020

Dear David Green,
Senior Technical Manager,
BDW Mercia

Multi-disciplinary Consultants:

- Energy Reports
- Sustainability Statements
- Daylight and Sunlight Studies
- Dynamic Overheating Analysis
- SAP / SBEM / EPC
- Carbon Reporting
- ISO14001 / 50001

Energy Statement: Proposed development at Bodicote, Oxfordshire

Please see below for an elaboration and clarification on the key points within the approved energy statement for Land West of White Post Road, Banbury, as compiled by an external consultant.

- Section 2 – 2.4.1 – Meeting building regulations Part L 2013 – This will be done through the use of an enhanced fabric specification, resulting in an improvement to the U-values on those required by the regulations. Depending upon the house type design and orientation, fabric improvements alone may not be sufficient to comply with the current building regulations.
- Section 3 – 3.1.3 – Where fabric improvements are required, WWHR will be incorporated to achieve the requirements of the building regulations. The developer has opted to install WWHR throughout in order to ensure the site exceeds the carbon emissions target over and above the requirements of the building regulations. The intention is for the following house types to utilise WWHR:

Alderney	Bloxham	Chester	DWB33
H417	H456	H457	H469
H497	H577	H588	Lutterworth
GF Maisonette	FF Maisonette	Maidstone	MBLO
Moresby	N107	P331	P341
P382	Radleigh	SH50	SH52
SH54	SH55	SH72	T50
T52	T55	Thornton	Wykham

- Section 3 – 3.2-3.9 – The development will use an improved specification, such as materials with better thermal properties and increased insulation, in order to achieve the enhanced U-values for each element mentioned in the energy statement. These improvements will also result in an improvement in the thermal bridging. The client has had these values calculated to demonstrate the improvements over the default values. Finally, the dwellings are to be designed in such a way that will limit the air tightness in order to comply with the regulations.

- Section 3 – 3.11 - WWHRS recovers heat from the warm waste water as it passes through a double walled heat exchanger, before going in the drainage system. The heat is transferred to the mains cold water supply, which is then supplied to the mains cold feed to the shower and/or a combination boiler or a hot water storage cylinder.

This process makes a significant reduction to the energy demand for providing hot water. The energy recovered depends on the temperature of the cold-water feed to the dwelling, which varies by month, and the number of systems that are installed. The WWHRS is installed vertically below the point of demand, i.e. within the waste ducting below the shower or bath.

There are three types of instantaneous WWHRS available:

- System A- the recovered heat is fed back in to both the boiler/cylinder and the shower
- System B- the recovered heat is fed in to only the shower
- System C- the recovered heat is fed back in to only the boiler/cylinder

WWHRS are considered as a low carbon technology and this is reflected when it is taken in to account for the SAP calculation. The principle behind the technology is that by recovering heat from water that would otherwise be going to waste, the energy demand required for the boiler to heat the incoming water is reduced. This in turn causes a reduction in the carbon emissions of the dwelling, resulting in a better DER value from the SAP calculation.

After analysing different options, it has been decided that in the event that the fabric improvements aren't sufficient, waste water heat recovery shall be installed in the relevant dwellings. This will reduce the carbon emissions of the dwellings and help achieve and exceed the minimum standard required by regulations.

I trust this information proves to be sufficient, please to do not hesitate to contact the undersigned if you have any further queries.

Kind regards,

Andrew Maughan

Email: andrew.maughan@ee-ltd.co.uk

Phone: 01582 544250



www.environmental-economics.co.uk Tel: 01582 544250

Reg. Office: Thermal House 8 Cardiff Road Luton Beds LU1 1PP Reg. No.06212758 Company VAT Number: 931 3723 40
Joint Managing Directors: R.Belanyi & H.Brown Technical Director: T.James

The Company's services are supplied on the terms and conditions set out in the Company's standard conditions of sale which shall prevail over any conflicting terms of the purchaser.

3. Decision Notice



Cherwell
DISTRICT COUNCIL
NORTH OXFORDSHIRE

NOTICE OF DECISION

TOWN AND COUNTRY PLANNING ACT 1990 (AS AMENDED)

Name and Address of Agent/Applicant:

BDW Trading Limited
Remus 2
2 Cranbrook Way
Solihull Business Park
Solihull

Planning Condition(s) Determination

Date Registered: 14th August 2019

Proposal: Discharge of Condition 20 (Site Environmental Management Plan), 21 (management, storage and/or disposal of spoil), 25 (archaeological Written Scheme of Investigation), 26 (on-site renewable energy provision) and 27 (34 space public car park) of 15/01326/OUT

Location: OS Parcels 6741 And 5426 West Of Cricket Field Nor, Wykham Lane, Bodicote

Parish(es): Bodicote Bodicote

CONFIRMATION OF CLEARANCE OF PLANNING CONDITION(S)

The Cherwell District Council, as Local Planning Authority, hereby **CONFIRMS** the clearance of the above condition(s), **IN ACCORDANCE WITH THE DETAILS OVERLEAF.**

Cherwell District Council
Bodicote House
Bodicote
BANBURY
OX15 4AA

David Peckford
Assistant Director – Planning and
Development

Date of Decision: 7th January 2021

Checked by: Andy Bateson

SCHEDULE OF DETAILS

1. Condition 20

Approval is given for the revised submission which addresses OCC's original concerns, in accordance with drawing numbers: 7942/CTMP/01 Rev C; BOD.TMP-01; and Compound Layout drawings DB-SD13-16A; and DB-SD 13-017.

2. Condition 21

Approval is given for the written statement and calculations submitted with the application and clarified by Drawing numbers: S13/352-1 Rev D; S13/352-2 Rev D; S13/352-3 Rev D; 957-05-101; 957-05-16; and 957-05-17.

3. Condition 25

Approval is given for the Revised Archaeological Written Scheme of Investigation received 14th October 2019.

4. Condition 26

Approval is given for the Energy Report Version 1 dated July 2019 and subsequent Addendum by Environmental Economics dated 24th June 2020.

5. Condition 27

Approval is given for the provision of the car park in accordance with drawing numbers: 957-0013; 957-00-13 Rev A; and 957-05-13 Rev C and the Micro-drainage calculations received 20th October 2020.

DEVELOPMENT MONITORING

The Council has identified the development hereby approved as one that it considers appropriate to monitor during construction. We would therefore be grateful if you could let us know of your intention to start the development at least 14 days prior to the commencement of work on site. You can do this by emailing the Council on: monitoring@cherwell-dc.gov.uk and providing us with the following information: application number; application address; and the date you intend to start the development. During the monitoring period, we will be assessing the development against the approved plans, and compliance with any conditions imposed on the permission. It is in your interest to comply with this request as it will help to avoid any unnecessary, and possibly expensive, corrective works.

PLANNING NOTES