



NOTES

- ALL WATER MAINS AND SERVICES HAVE BEEN LAD TO LINES AND LEVELS STARTED ON THIS AS LAD DRAWING
- ALL WATER APPARATUS HAVE BEEN CORRECTLY CHAMBERED AND HAVE BEEN FITTED WITH COVERS SUITABLE AND COMPLIANT WITH THE APPARATUS CONTAINED THEREIN.


LEEP WATER MAIN		BOUNDARY METER	
SUPPLY MAIN		BULK SUPPLY	
SLUCE VALVE		WASH OUT HYDRANT	
AIR VALVE		FIRE HYDRANT	
2-WAY MANIFOLD		MAINS DUCT	
6-WAY MANIFOLD		SERVICE DUCT	
PRIVATE MAIN			

New Main	Material	Approx. Length of Main (m)
355mm	HPPE	315m
250mm	HPPE	553m
180mm	HPPE	1354m
125mm	HPPE	2832m
125mm	PEB	688m
90mm	HPPE	9328m
90mm	PEB	936m
63mm	HPPE	1800m
63mm	PEB	139m

The information shown on this plan is given without obligation or warranty. The accuracy thereof cannot be guaranteed. Where service pipes are shown their position is approximate. No liability of any kind whatsoever is accepted by the company, its agents or servants for any error or omission. The actual position of mains and services must be verified and established on site before any excavations are carried out or any mechanical plant used.

Rev	Date	Purpose of Revision	Drawn	Checked	Reviewed	Approved
0	06.11.2019	First Submission - For Approval	GT	JC	-	-

POTABLE WATER INFRASTRUCTURE

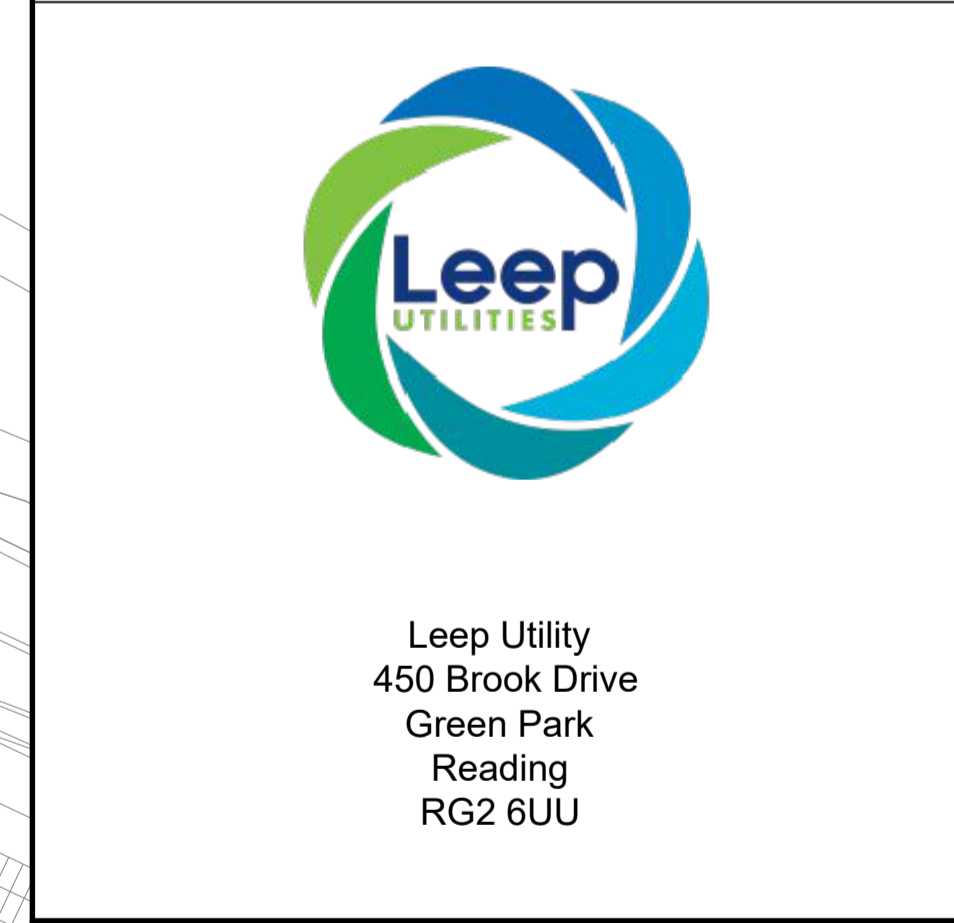

PROJECT TITLE
KINGSMERE
PAGE 2 of 3
FOR APPROVAL

DRAWING TITLE
SW BICESTER
CHERWELL
OXFORDSHIRE
OX26 1AE

DATE	SCALE	MASTER SIZE
06/11/2019	1:1200	A1

Based upon Ordnance Survey Digital Data with the permission of the controller of H.M.S.O. Crown Copyright Reserved