


THE FINEST TIMBER WINDOWS & DOORS

Estimate : 19061717

Item : 7 (Please Note: Image viewed from outside. Arrow denotes hinge position)

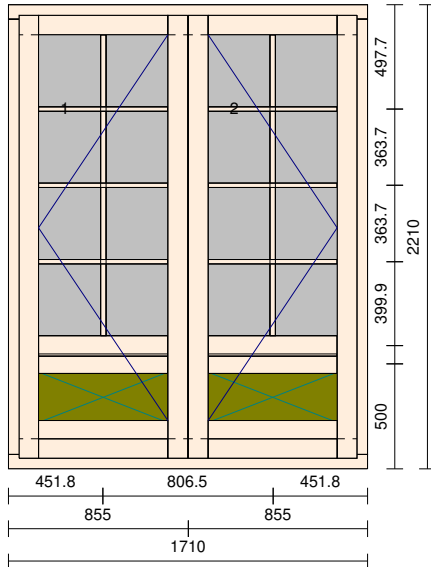

Quantity	Description	Per Item	Total
1	<p>D3 Product: Conservation Open Out Door Size: 1710 mm x 2210 mm Weight: 124 kg Frame Timber: Laminated Larch / Engineered Hardwood Sash Timber: Laminated Larch Finish: Fully Finished Paint 3 Coat Colour: RAL 9003 Signal White Frame/Sash: Ovolo /Ovolo Swedish Joint Sash Bar: Door Midrail 22mm Ovolo Applied Glazing Bars Sash: Outward Door Openings: LH French 1st Outward Door RH French 2nd Outward Door Hardware: Windsor Lever Handle Brass (Sent Loose) Butt Hinge - Lift Off Powdercoat White -- FSC Material Used -- Brass Euro Cylinder Lever-Operated Multi-point Lock Door Cylinder sent loose Attachments: 34 x 60mm Cill Extender No Window Board Groove Glass Spec: 4mm Clear Toughened / 16mm Argon / 4mm Clear Toughened Soft Coat Low-E PLUS 28mm HDF Flat Panel (Standard Bead) Options: White WarmEdge Spacer (Std)</p>		

