ELEVATIONS VIEWED FROM OUTSIDE

SYSTEM

ROOFLIGHT MANUFACTURED FROM 3.5mm THICK MILD STEEL SHEET CURB PRESSINGS AND 3mm THICK MILD STEEL SHEET VENT PRESSINGS

CORNERS MITRED AND FULLY WELDED

FINISH

POLYZINC 770 AFTER ALL FABRICATION.
POWDER COATED TO BS6497 / BS EN 13438
POLYESTER POWDER COATED RAL 9005 (BLACK) MATT

HARDWARE & ATTACHMENTS

1PAIR. WELD-ON HINGES FITTED WITH WELDED MOUNTING PLATES TO FRAME AND VENT PROFILES TO ACCOMODATE VENT OPERATOR.

GLAZING

PREPARED FOR & SUPPLIED WITH CLEMENT 24mm SEALED UNITS, WITH STEPPED BOTTOM EDGE; WITH SILICONE SEALANT


SPACER BAR - SILVER SILICONE CAPPING - BLACK. PERIMETER POINTING - BLACK.

GLASS SPECIFICATION:-


OUTER - 4mm TOUGHENED BIOCLEAN II (SELF CLEANING GLASS)

INNER - 4mm TOUGHENED THERMOFLOAT (STEPPED BACK AT BOTTOM BY 55mm)


DIM CHART	Overall Size W x H	Aperture Size W x H	Between Timber Trimmers W x H
Clement SH	960 x 1270	652 x 962	730 x 1026

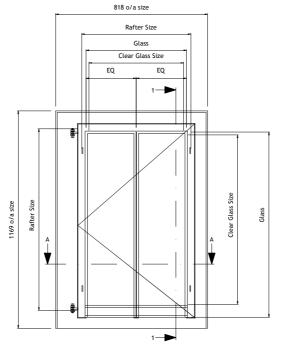

SLATE ROOF APPLICATION

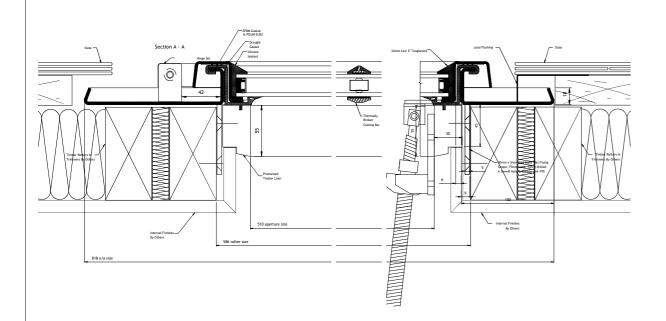

HALF FULL SIZE

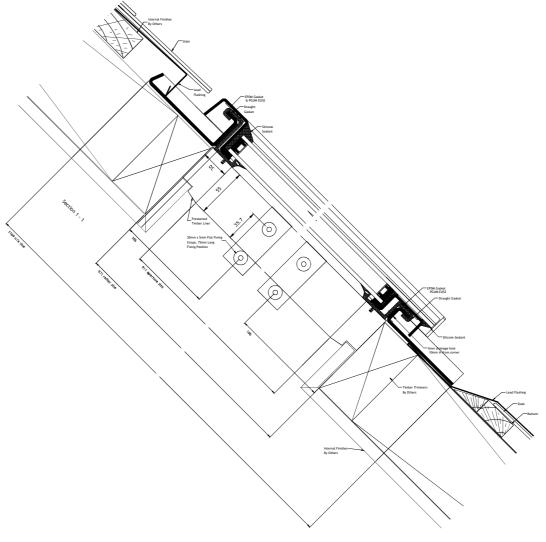

HALF FULL SIZE @ A1

1. DO NOT SCALE

2. PLEASE NOTE THAT ALL PRODUCT ARE SUBJECT TO MANUFACTURING TOLERENCE OF +0mm / -2mm

REVISIONS

For Information

COMMENTS

Drawing Title

CLEMENT CONSERVATION ROOFLIGHT
SLATE APPLICATION
SIDE HUNG
SHEET 1

Project/Site

Contractor/Client ROOFLIGHT DEPARTMENT

DATE REV INT

Scale @ A1: 1:2 & 1:10

Drawn By:

Date: 24-05-17

Haslemere Surrey, GU27 1HR Tel: 01428 643393 Fax: 01428 644436 E-mail: Info@clementwg.co.uk

Drawing No. D-CRPM-07