

LITEHOUSE ROOT MOUNTED

LED


CFL



Black
LHR/B



Titanium
LHR/X



Size	LHR
A	260mm
B	1015mm
C	400mm
D	153mm



LED / Lamp Types

- 26W 4000K TC-D 4-Pin G24q-3 Cap.
- 42W 4000K TC-T 4Pin.
- 150W (max) (E27 version also available).
- LED options.

Materials


- Head: Vandal resistant UV stabilised polycarbonate.
- Diffuser 1: Vandal resistant UV stabilised polycarbonate fresnel lens + Optical Louvre with top reflector.
- Diffuser 2: Vandal resistant UV stabilised opal polycarbonate.
- Body 1: Extruded aluminium column finished with a UV stabilised polyester powder coated in black.
- Body 2: High impact PVC column in black.
- Ground Trim / Kick Plate: Extruded aluminium (optional extra).

Installation

- Root mounted.
- IP65 Seal.
- No visible fixings.
- Easy lamp maintenance.
- 3 way mains terminal block. 4 way terminal block for photocell versions.

Standards

- IP65.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

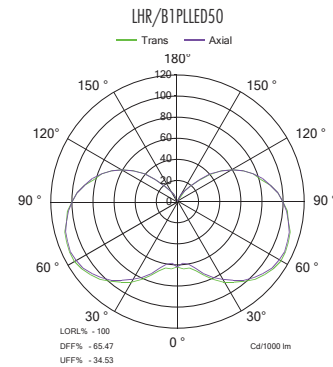

Options

LED	Lighthouse Root Mounted Code	Colour Finish	Diffuser	IP Rating	CRI	CCT	System Power	Delivered Lumens	Efficacy	Emergency	Photocell
LED Standard Output	LHR/B1PLLED35	Black	Premium Opal	IP65	75	4000K	14.1W	953lm	67.5lm/W	✓	✓
LED High Output	LHR/B1PLLED50	Black	Premium Opal	IP65	75	4000K	19.5W	1258lm	64.5lm/W	✓	✓

CFL	Lighthouse Root Mounted Code	Colour Finish	Diffuser	IP Rating	Emergency	Photocell
150W	LHR/B1PL150U	Black	Premium Opal	IP65	✓	✓
26W HF	LHR/B1PL126E	Black	Premium Opal	IP65	✓	✓
42W HF	LHR/B1PL142E	Black	Premium Opal	IP65	✓	✓

Code Options (Add suffix to code)



3 Hour Maintained
Emergency
M



Photocell
C

Option	Code
Black Foot Trim	LHT/B
Root First Fit Kit	LHF/KIT1

Diffuser Option	Change code
Fresnel	LHR/_ _ _ F
Body Option	Change code
Aluminium	LHR/_ _ A