



FOOTPATH SURFACE TO BE ROTAVATED TO A DEPTH OF 200mm

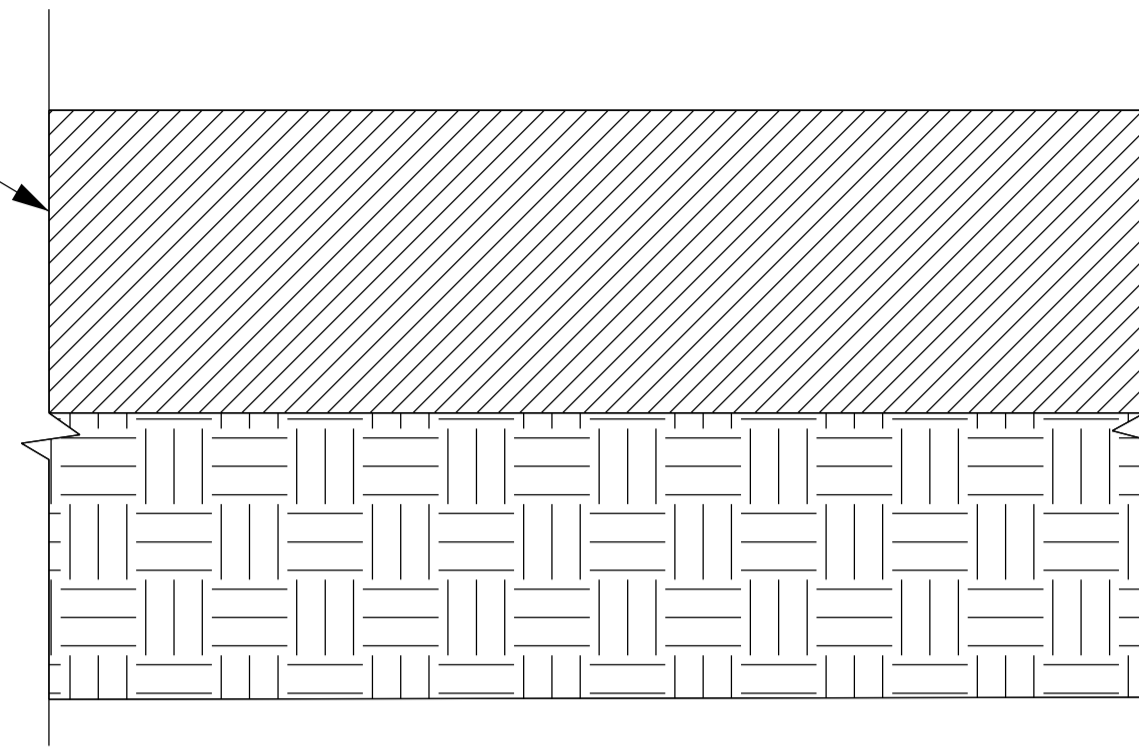

EXTINGUISHED FOOTPATH TO BE SEEDED WITH GENERAL GRASS SEED WHERE APPLICABLE

FOOTPATH TO BE EXTINGUISHED


NEW FOOTPATH TO BE ROTAVATED TO A DEPT OF 150mm AND THEN COMPACTED WITH NO VIBRATIONS

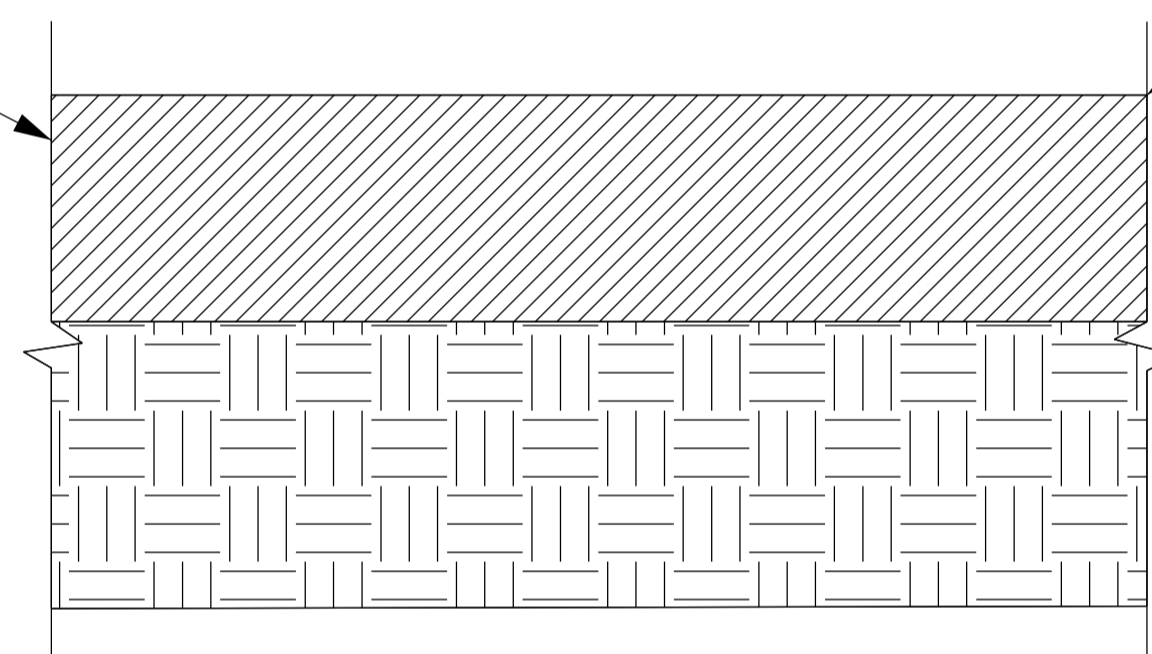

FOOTPATH TO BE SEEDED WITH GENERAL GRASS SEED WHERE APPLICABLE

NEW UNSURFACED FOOTPATH

NEW FOOTPATH TO BE ROTAVATED TO A DEPT OF 150mm AND THEN COMPACTED

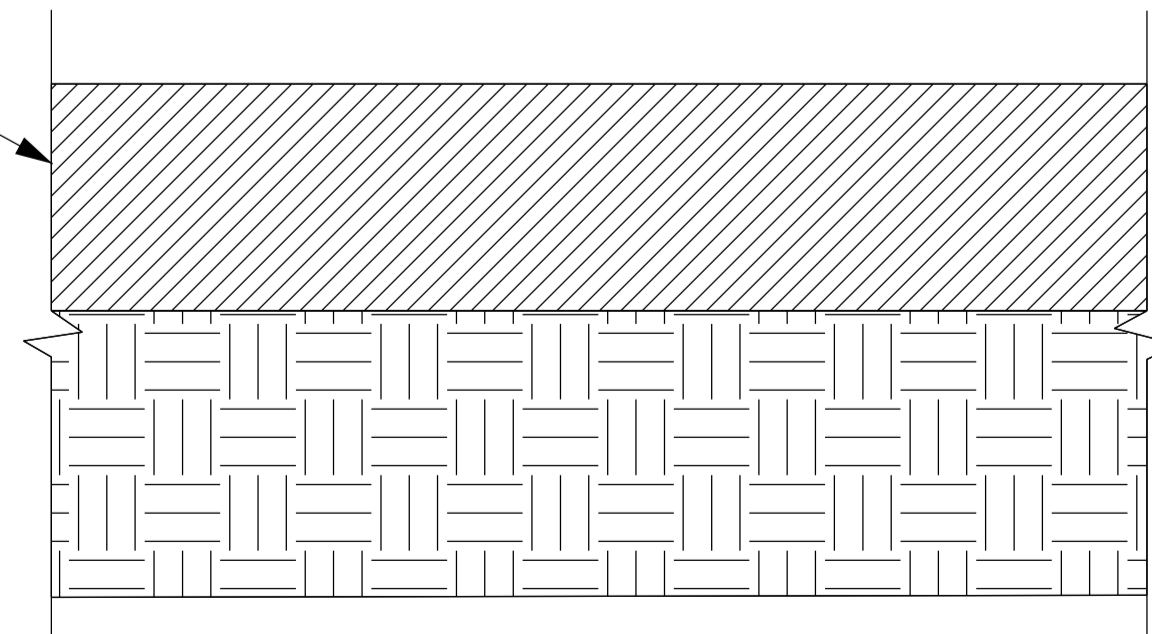

NEW FOOTPATH

NETWORK RAIL (EAST WEST RAIL WESTERN SECTION PHASE 2)

1. ALL DIMENSIONS ARE IN MILIMETRES UNLESS STATED OTHERWISE.
2. PRIOR TO PLANNED WORKS SUCH AS ESTABLISHMENT OF A NEW ROUTE OR EXTINGUISHMENT OF AN ESTABLISHED ROUTE BEING UNDERTAKEN, THE LANDOWNER WILL BE CONSULTED TO ENSURE THE EXTINGUISHED ROUTE IS TO BE PHYSICALLY REMOVED AND THE PRoW OFFICER LIAISED WITH TO CONFIRM THE PLANNED START OF WORKS.

Rev	Date	Description of Revisions	Dsnd	Chkd	Appr
B01	24/04/20		--	--	--
Status					Appr Suitability



Project
East West Rail
(Western Section)
Phase 2

Drawing Title
STANDARD CONSTRUCTION DETAIL
PRoW FOOTWAY CONSTRUCTION

Designed	---	Signed	---	Date	---
Drawn	Tamsin Leaman-Hewitt	Signed	T. Leaman-Hewitt	Date	24/04/20
Checked	---	Signed	---	Date	---
Approved	---	Signed	---	Date	---

Scale(s)
1:5
ELR - Project Chainage (Miles Yards)
XX -

Design Package Risk Classification
Normal
Sheet
1 of 1

Alternative Reference
Revision
B01

Drawing Number
133735_RW-EWR-XX-XX-DR-CH-000227