

Softworks Schedule

Trees				
Number	Abbreviation	Species	Specification	Density
2	BETPE	Betula pendula	RB	Counted

Shrubs				
Number	Abbreviation	Species	Specification	Density
7		Miscanthus 'Kleine Fontaine'	C	1/m ²
7	ROSOFFB	Rosmarinus officinalis 'Benenden Blue'	C	1/m ²


5 No. Miscanthus 'Kleine Fontaine'
5 No. Rosmarinus officinalis 'Benenden Blue'

2 No. Rosmarinus officinalis 'Benenden Blue'
2 No. Miscanthus 'Kleine Fontaine'

2 No. Betula pendula

- A** Signage to be secured at the entrance in to the play space. Exact wording and design to be confirmed
- B** Site leveling and groundworks by others
- C** Pathways by others
- D** Premium grade turf to mounding
- E** Self binding gravel to 50mm depth, laid over MOT type 1 retained with timber edging
- F** Mounding works up to 0.5m height created using spoil generated on site. Additional suitable fill and topsoil by others if required
- G** Bonded rubber mulch Natural colour, laid over 50mm MOT type 1 with edges cut into turf - depths of rubber mulch to relate to the appropriate free fall heights
- H** Play Spec 1m High galvanised and powdercoated Black Bowtop Fencing
- I** Single leaf hydraulic Pro-Safe self closing pedestrian access gate 1.2m wide in red for partially sighted users
- J** Area sown with amenity grass seed mix
- K** Area sown with wildflower seed mix to create 'toddler maze'

Vinci Play
Timber Basic Tower
Code: PVR1041-B-PT

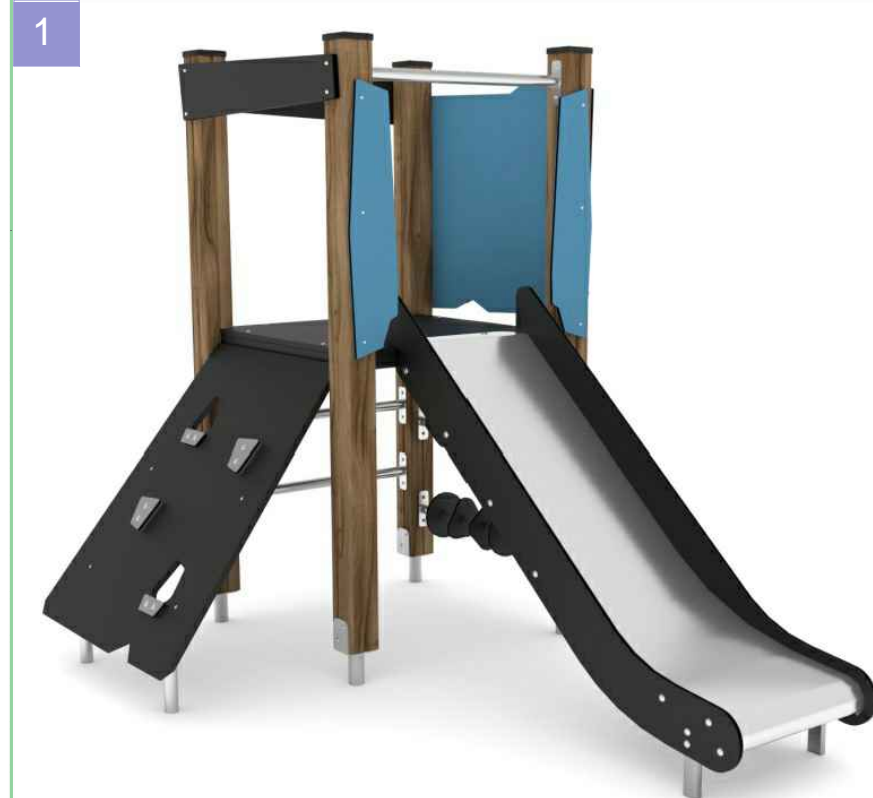

Broxap
Medway Seat
Code: BX144026



Broxap
Derby E Slimline Little Bin
Code: BX45G 2596-E



Images are an indicative representation, colours and specification subject to variation