


CAPPING LAYER THICKNESS	
CBR	6F1 LAYER THICKNESS BELOW SUB-BASE
<3%	600mm / REFER TO ENGINEER
3%	250mm
4%	250mm
5%	250mm
>5%	200mm

IN AREAS OF VERY SOFT SUBGRADE THE CAPPING LAYER THICKNESS SHALL BE INCREASED TO 600MM AND A GEOTEXTILE SUCH AS TERRAM INCORPORATED BENEATH THE CAPPING LAYER. ALL MATERIAL WITHIN 450MM OF THE FINISHED LEVELS TO BE NON FROST-SUSCEPTIBLE.

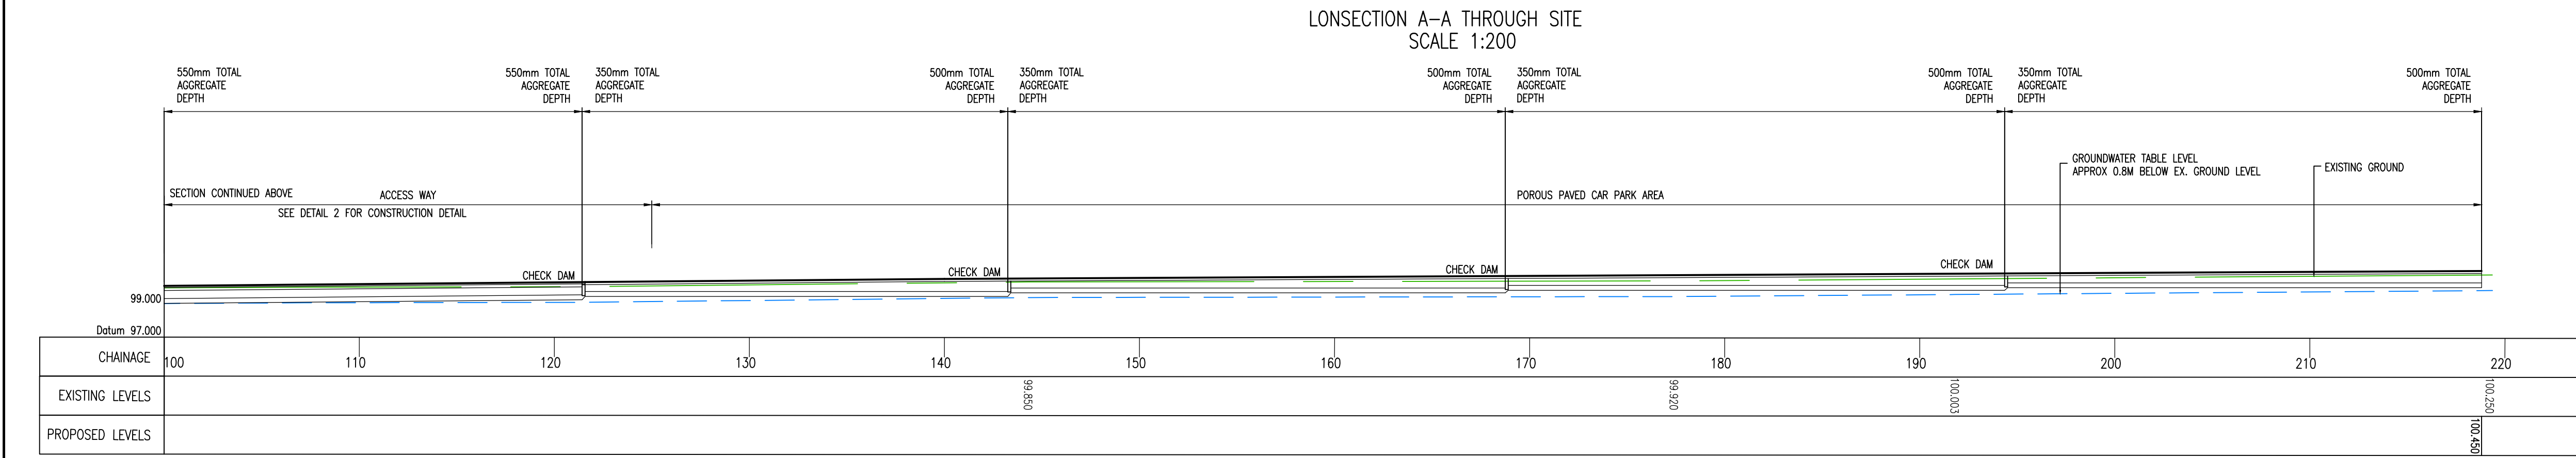

P03	13/02/2018	RW	DETAIL 5 ADDED	MB	MB
P02	01/02/2018	MM	AGGREGATE SPECI UPDATED. NOTE 2 REVISED AGGREGATE DEPTHS ADDED TO LONG SECTION	AJG	MB
P01	15/12/2017	MLH	FIRST ISSUE	AJG	MB
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS: S2 - FOR INFORMATION

wsp

Unit 9 The Chase, John Tate Road, Foxholes Business Park, Hertford, SG13 7NN, UK
T+ 44 (0) 1992 526 000, F+ 44 (0) 1992 526 001
wsp.com

CLIENT: ATLAS HOTELS GROUP

ARCHITECT: NORR

SITE/PROJECT: HOLIDAY INN EXPRESS BICESTER GATEWAY

TITLE: PAVEMENT AND DRAINAGE SECTION AND DETAILS

SCALE @ A1:	CHECKED:	APPROVED:
1:500	AJG	MB
PROJECT NO:	DESIGNED:	DRAWN:
70033775	MM	MM
		DATE:
		January 18

DRAWING NO:	REV:
3775-WSP-00-ZZ-DR-CE-1004	P03

© WSP UK Ltd

File name: I:\UK\WSP\GROUP\CONCENTRAL DATA\PROJECTS\70033775\70033775-00-ZZ-DR-CE-1004.DWG, printed on 13 February 2018 14:55:01, by Willek, Kadi