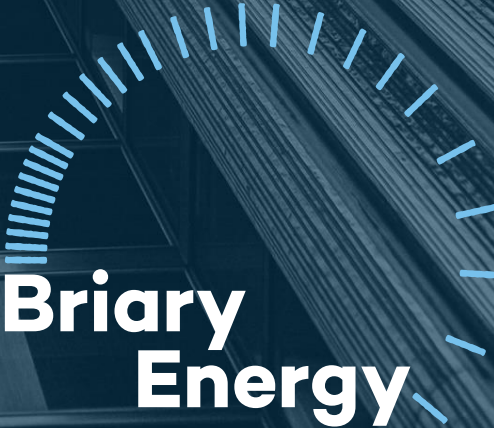


# Part G Water Efficiency Calculation

Hempton Road - Plot 13

---

Burrington Estates

The logo for Briary Energy features a stylized sunburst or fan shape composed of numerous thin, parallel lines radiating from a central point. The lines are white and blue, creating a sense of motion and energy. Below the graphic, the words "Briary" and "Energy" are stacked in a bold, white, sans-serif font.

**Briary  
Energy**

January 2022

# Water Use Assessment Calculation Report

Certificate Ref: BE44581928

Issued: 20 January 2022

Client: Burrington Estates

Project Details: Hempton Road - Plot 13

Performance Target: 110 (litres / person / day)

*Building Regulations Part G - 110l*

Number of Bedrooms: 3

Occupancy for Calculation Purposes: 4

Installation Type	Unit	Capacity/ Flow Rate	Use Factor	Fixed use (l/p/day)	Total Use (l/p/day)
WC Single Flush	Volume (l)	0.00	4.42	0.00	0.00
WC Dual Flush	Full Flush (l)	0.00	1.46	0.00	0.00
	Pt Flush (l)	0.00	2.96	0.00	0.00
WC's (Multiple)	Volume (l)	4.00	4.42	0.00	17.68
Taps Exc. Kitchen	Flow Rate	5.00	1.58	1.58	9.48
Bath (shower present)	(l/s)	156.00	0.11	0.00	17.16
Shower (bath present)	(l/s)	8.00	4.37	0.00	34.96
Bath Only	(l)	0.00	0.50	0.00	0.00
Shower Only	(l/s)	0.00	5.60	0.00	0.00
Kitchen Taps	(l/s)	10.20	0.44	10.36	14.85
Washing Machines	(l/kgdry)	7.43	2.10	0.00	15.60
Dishwashers	(l/place)	0.98	3.60	0.00	3.53
Waste Disposal	(l/s)	0.00	3.08	0.00	0.00
Water Softener	(l/s)	0.00	1.00	0.00	0.00
Total Calculated Water Use (l/p/day)					113.26
Grey/Rainwater Reused (l)					0.00
Normalisation Factor					0.91
External Water Use Allowance (l)					5.00
<b>Total Consumption Part G (l/p/day)</b>					<b>108.07</b>

Part G Reg Assessment Result

Pass ✓

The calculation methodology uses the water consumption figures provided from manufacturers' product details. Where details have not been provided, assumed figures have been used to achieve compliance. These must be met in order to satisfy the Part G Calculation for Hempton Road - Plot 13. The calculation methodology is to be used to assess compliance against the water performance targets in Regulation 36. It is not a design tool for water supply and drainage systems. It is also not capable of calculating the actual potable water consumption of a new dwelling. Behaviour and changing behaviour can also have an effect on the amount of potable water used throughout a home.

## Appliance/Usage Details

### Taps (Excluding Kitchen Taps)

Tap Fitting Type	Flow Rate Litres/Min	Quantity (No.)	Total per Fitting type
Bathroom sink mixer taps	5	3	15.00
			0.00
			0.00
			0.00
			0.00
			0.00
Total No. of Fittings (No.)			3
Total Flow (l/s)			15.00
Maximum Flow (l/s)			5.00
Average Flow (l/s)			5.00
Weighted Average Flow (l/s)			3.50
Flow for Calculation (l/s)			5.00

### Showers

Shower fitting Type	Flow Rate Litres/Min	Quantity (No.)	Total per Fitting type
Shower above bath	8	0	0.00
Shower	8	2	16.00
			0.00
			0.00
			0.00
			0.00
Total No. of Fittings (No.)			2
Total Flow (l/s)			16.00
Maximum Flow (l/s)			8.00
Average Flow (l/s)			8.00
Weighted Average Flow (l/s)			5.60
Flow for Calculation (l/s)			8.00

### Baths

Bath Type	Capacity to Overflow	Quantity (No.)	Total per Fitting type
Bath	156	1	156.00
			0.00
			0.00
Total No. of Fittings (No.)			1
Total Capacity (l)			156.00
Maximum Capacity (l)			156.00
Average Capacity (l)			156.00
Weighted Average Capacity (l)			109.20
Capacity for Calculation (l)			156.00

### WCs

WC Type	Full Flush Volume	Part Flush Volume	Quantity (No)
Dual flush toilet	6	3	3
Total number of fittings			3
Average effective flushing volume			4.00

### Dishwashers

Dishwasher Type	L per Place Setting	Quantity (No.)	Total per Fitting type
Dishwasher	0.98	1	0.98
			0.00
Total No. of Fittings (No.)			1
Total Consumption (l)			0.98
Maximum Consumption (l)			0.98
Average Consumption (l/s)			0.98
Weighted Average Consumption (l)			0.69
Consumption for Calculation (l/s)			0.98

### Washing Machines

Washing Machine Type	L per Kg Dry Load	Quantity (No.)	Total per Fitting type
Washing Machine	7.43	1	7.43
			0.00
Total No. of Fittings (No.)			1
Total Consumption (l)			7.43
Maximum Consumption (l)			7.43
Average Consumption (l/s)			7.43
Weighted Average Consumption (l)			5.20
Consumption for Calculation (l/s)			7.43

### Kitchen Taps

Tap Fitting Type	Flow Rate Litres/Min	Quantity (No.)	Total per Fitting type
Kitchen Tap	10.2	1	10.20
			0.00
			0.00
Total No. of Fittings (No.)			1
Total Flow (l/s)			10.20
Maximum Flow (l/s)			10.20
Average Flow (l/s)			10.20
Weighted Average Flow (l/s)			7.14
Flow for Calculation (l/s)			10.20

### Other Fittings

Waste Disposal Y/N	N
Water softener	
Consumption beyond 4% l/	0.00

### Use of grey water and harvested rainwater

Total Grey water from WHB taps (l)	0.00
Total Available Grey Water Supply (l)	208.48
Possible Demand (l)	133.13
Grey/Rain Installed Capacity (l)	0.00
Figure for Calculation lit/person/day	0.00



+44 20 3397 1373  
info@briaryenergy.co.uk

**BRIARYENERGY.CO.UK**

Bishops Court  
17a The Broadway  
Old Hatfield  
Hertfordshire  
AL9 5HZ  
England