STOCKING LANE
SHENINGTON

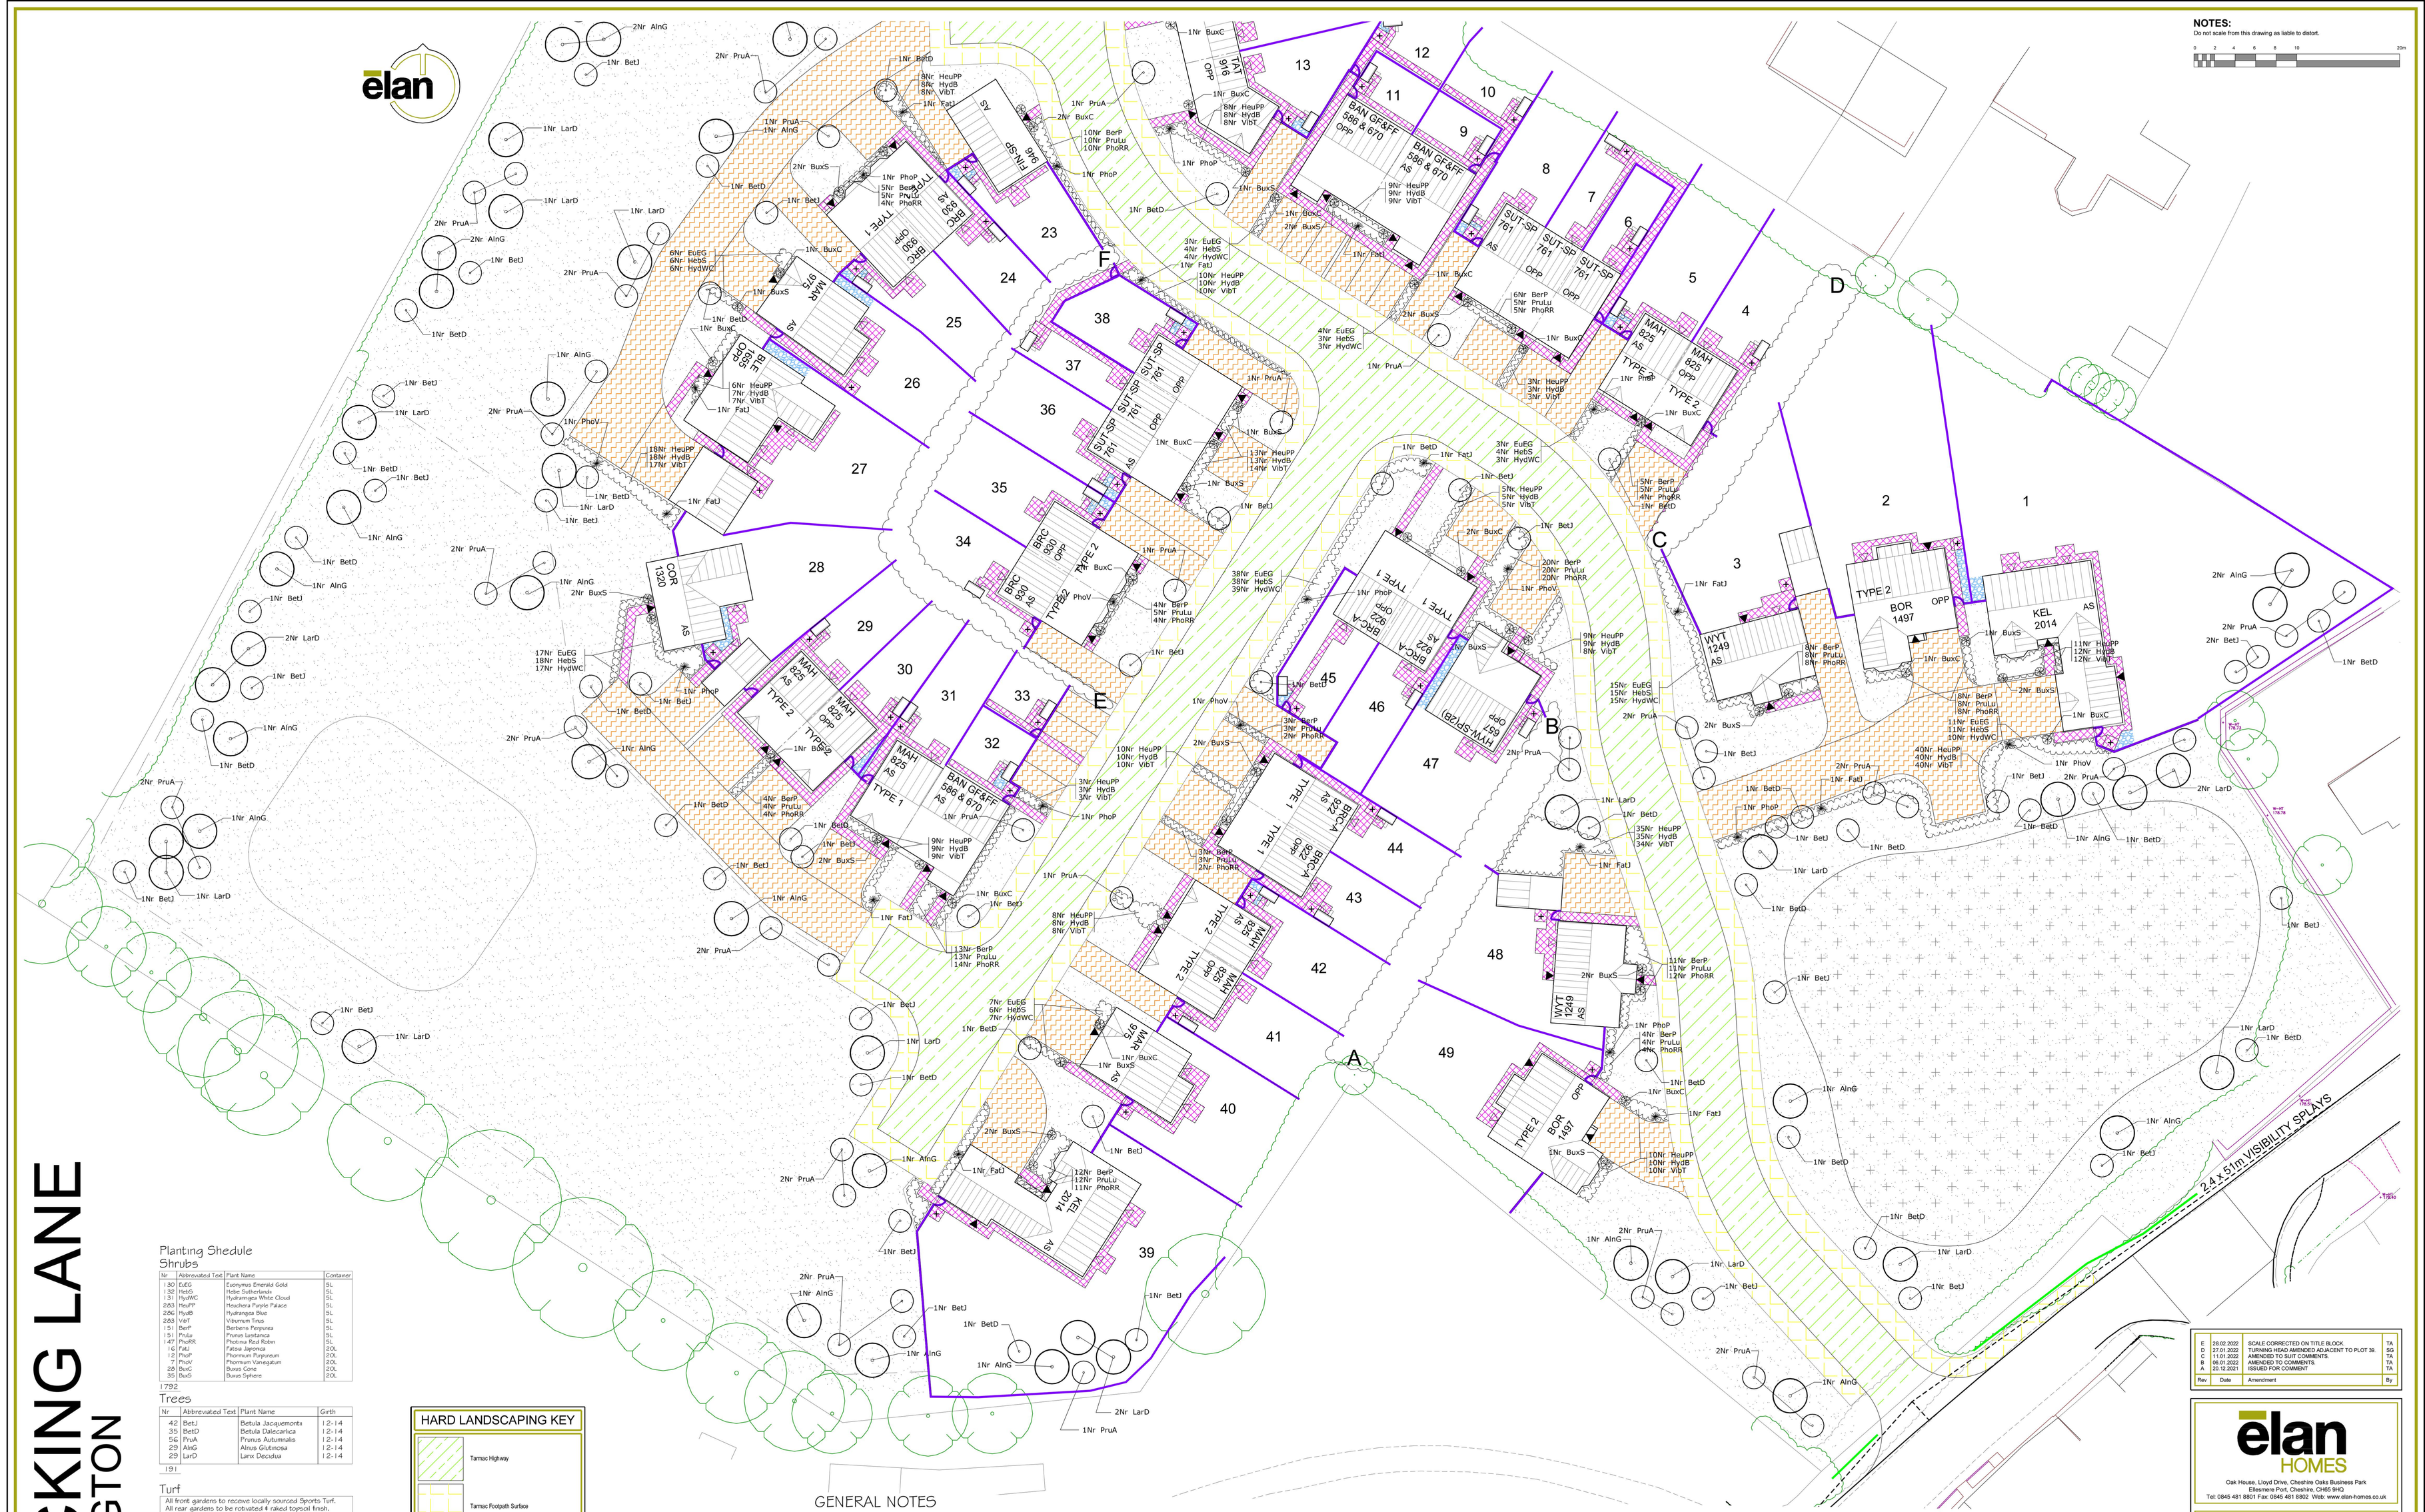

Planting Shedule

Shrubs

Nr	Abbreviated Text	Plant Name	Container
130	EuEG	Euonymus Emerald Gold	5L
132	HebS	Hebe Sutherlandii	5L
131	HydWC	Hydrangea White Cloud	5L
283	HeuPP	Heuchera Purple Palace	5L
286	HydB	Hydrangea Blue	5L
253	VibT	Viburnum Tinus	5L
151	BerP	Berberis Pinpurea	5L
151	PruLu	Prunus Lusitanica	5L
147	PhoRR	Photinia Red Robin	5L
16	FatJ	Fatsia Japonica	20L
12	PhoP	Phormium Purpureum	20L
7	PhoV	Phormium Variegatum	20L
28	BuxC	Buxus Cone	20L
35	BuxS	Buxus Sphere	20L

1792

Trees

Nr	Abbreviated Text	Plant Name	Girth
42	BetJ	Betula Jacquemontii	12-14
35	BetD	Betula Dalecarlica	12-14
56	PruA	Prunus Autumnalis	12-14
29	AlnG	Alnus Glutinosa	12-14
29	LarD	Larix Decidua	12-14

191

Turf

All front gardens to receive locally sourced Sports Turf.
All rear gardens to be rotivated & raked topsoil finsh.

Hedges

All hedge areas to be planted with densities to allow for adequate coverage in accordance with good horticultural practice to BS 4428.

Native species hedges.

50% Hawthorn, 20% Blackthorn, 10% Holly, 10% Field Maple, 10% Wild Rose 60-90cms, cell grown transplants, planted at 5 per linear m in grow tubes (to be protected during the establishment phase and ideally be a double staggered row, 450mm between shrubs and 250mm between rows)

Distance	Hawthorn	Blackthorn	Holly	Field Maple	Wild Rose	No's
(A-B) 38m	95	38	19	19	19	190
(C-D) 23m	58	23	11	12	11	115
(E-F) 63m	157	63	32	31	32	315
Total 124m	310	124	62	62	62	620

HARD LANDSCAPING KEY

- Tarmac Highway
- Tarmac Footpath Surface
- Tarmac Private Drive & Driveways
- Riven Concrete Paved Footpath
- Gravel

KEY

- 1800mm High Close Boarded Fencing.
- 1800mm high brickwork screenwall with fence panels, with max.3m between piers.
- Reinstatement of Ironstone Wall along site frontage to Rattlecombe Road.
- 1800mm high timber gate with a pad lockable bolt to the mid point of the internal face.
- Bin storage areas.

GENERAL NOTES

1. The contractor shall ensure that all topsoil is cultivated in accordance with BS 3882. All rubbish, concrete, metal, glass, decayed vegetation, contaminated soil (soil containing subsoil, rubble, fuel, lubricants or other substances damaging to plants) and stones with largest dimension exceeding 25mm, shall be removed. Topsoil minimum depths to suit plant / turf requirements in this location & NHBC standards, whichever is the greater.
2. Cultivate and plant into moist, friable soil, free from compaction and that is not waterlogged, frozen or snow-covered, unless with the express permission of the Landscape Architect.
3. Any imported topsoil is to comply with BS 3882 and be free from all rubbish, concrete, metal, glass, decayed vegetation, contaminants (as described in 1.) and stones with largest dimension exceeding 25mm.
4. All planting and turfing shall conform to BS 3936 & 4428 and shall be carried out in strict accordance with the specification. All sizes quoted are the minimums acceptable. All plants to be supplied by nurseries listed by The Horticultural Trades Association Nursery Certification Scheme. No substitutions shall be acceptable without the prior written approval of the Landscape Architect.
5. Standard trees to be planted in 650mm x 650mm x 400mm tree pits, and supported using 1No. 75mm dia stake, 1500mm long, per tree, driven 900mm into ground and secured with steel reinforced rubber belt 5B30 & 1No. Original Standard Pad (01) per tree. Semi-mature trees to be planted in conjunction
6. Container grown shrubs to be be planted in a pit big enough to accomodate the plant the plant without root damage, and shall in any case be a minimum of 300mm x 300mm x 300mm.
7. Bare-root shrubs to be planted between mid-November and mid-March.
8. All planting pits to be backfilled with mixture of excavated topsoil and 100g/m2 of a slow release 16,10,10 fertiliser. Water all plants thoroughly, immediately after planting, using a fine-rose or sprinkler. Lightly firm soil around plants without roots and rake lightly to a fine tilth, with no hollows.
9. Areas to be turfed shall be cultivated and leveled as required, removing any debris or stone as described in 1. Add a pre-seeding fertiliser to manufacturers instructions. Use cultivated, weed-free amenity turf, laid with broken joints, well butted up. Work from planks to prevent damage and water sufficiently to prevent shrinkage
10. Areas to be seeded shall be cultivated and leveled as required, removing any debris or stone as described in 1. Sow seed only in March, April or September if possible, to manufacturers recommendations.
11. All planting beds to be mulched using an approved no-fines bark mulch, to a depth of 50mm, ensuring top of the mulch layer is 15mm below adjacent pavements or other surfaces, to prevent spillage.
12. All shrub planting to be limited to a density of 5/m2.

Rev	Date	Amendment	By
E	28.02.2022	SCALE CORRECTED ON TITLE BLOCK	TA
D	07.01.2022	TURNING HEAD AMENDED ADJACENT TO PLOT 39.	SG
C	11.01.2022	AMENDED TO SUIT COMMENTS.	TA
B	06.01.2022	AMENDED TO COMMENTS.	TA
A	20.12.2021	ISSUED FOR COMMENT	TA

elan HOMES
Oak House, Lloyd Drive, Cheshire Oaks Business Park
Ellesmere Port, Cheshire, CH65 9HQ
Tel: 0845 481 8801 Fax: 0845 481 8802 Web: www.elan-homes.co.uk

DEVELOPMENT:
LAND OFF STOCKING LANE, SHENINGTON.

TITLE:
LANDSCAPING LAYOUT 1/2

DATE:	SCALE:	DRAWN:
20.12.2021	1:200 @ A0	TA

DRAWING NO:	REV:
SHN-LL-001	E