


DOMESTIC DRIVE (No dig construction within RPA of existing trees)
 SURFACE: 50mm surface layer of 10 - 20mm Tinkers Barn (or equal and approved) Limestone chippings. 50mm overfill of Highways Agency Type 3
 BASE: Geosynthetics cell web (or equal and approved) infilled with 200mm of Highways Agency Type Type 3 aggregate. Contractor to CBR test the existing soil to confirm the depth of CellWeb
 SUB BASE: 50mm Highways Agency Type 3 laid on Ekotex 07 Geotextile

Proposed ground level carefully graded into existing ground level

Existing ground level

1:60 Fall

7 Vehicular Entrance
405

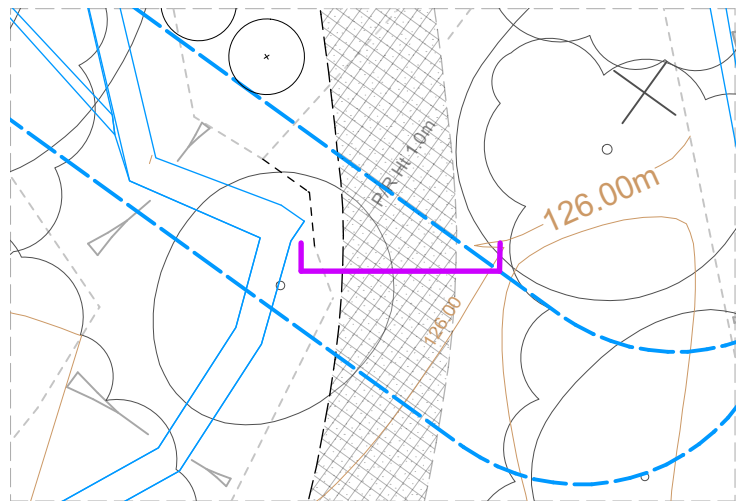

BARN & ENTRANCE LAYOUT: SECTION KK'

Notes:

1. All dimensions are in millimeters unless otherwise specified.
2. Contractors must check all dimensions and levels on site. Only figured dimensions to be worked from.

SEED
 landscape design
 Upper Floor, School House
 Bath BA1 5NA
 +44 (0)1225 424 514
 info@seedlandscape.com
 project
 Oxpens,
 Oxfordshire

rev	date	changes
Stage 4		
drawing		client
DETAIL - Vehicular Entrance		Patrick & Gilly Fennessy
number		scale
OXO_405		1:20 @A3
date		drawn by / checked by
28/06/2022		JM / MS

Contractors must check all dimensions and levels on site. Only figured dimensions to be worked from