




NOTES:
Based upon the Ordnance Survey map with permission of The Controller of Her Majesty's Stationery Office. © Crown Copyright.
Aspect Landscape Planning Ltd, West Court, Hardwick Business Park, Nosal Way, Banbury OX16 2AF.
Licence 10004345

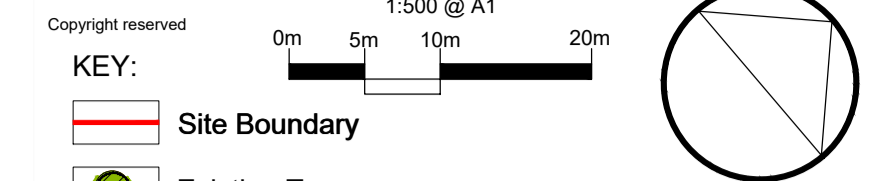

- KEY:
- Site Boundary
 - Existing Trees
 - Existing Shrubs
 - Proposed Multistem Trees
 - Proposed Trees
(to be positioned 2m from highway boundary and 1m from kerb edge)
 - Proposed Native Hedge
(Cane and Rabbit guards added with 50mm bark mulch)
 - Proposed Ornamental Hedge
(Initially clipped to 0.5m high and subsequently maintained at 0.6m high, offset 0.5m from back of highway boundary with a 0.5m bark mulch strip)
 - Proposed Feature Shrub
 - Proposed Ornamental Shrubs
(50mm Bark mulch to be included around planting)
 - Proposed Native Shrub Planting
(50mm Bark mulch to be included around planting)
 - Proposed Bulb Planting
(Scattered Randomly where to be planted)
 - Proposed Premium Grade Turf
(150mm min gravel strip with timber edge to be installed along building edge)
Rollow Mediator Turf Rolls or Similar to be included
 - Proposed Amenity Grass Seed
(Emergate EL1 Flowering Lawn Mixture, Sown at 40g/m²)
 - Proposed Wildflower Turf
Wildflower Turf Shade Tolerant Mix
 - Proposed Root Barrier
(ReRoot 1000 or equivalent)
 - Proposed Timber Seat
Desford Seat with Backrest
Supplier: Broxap
Finish: Hardwood Slats
Size: L1920mm W540mm H780mm
Root Fixed
Ref: BX12 Desford I-BR
 - Proposed Timber Bench
Desford Bench
Supplier: Broxap
Finish: Hardwood Slats
Size: L1920mm W480mm H440mm
Root Fixed
Ref: BX12 Desford I

- Okehampton Redwood Litter Bin
Supplier: Broxap
Size: D500mm W500mm H950mm
Finish: Redwood Timber Slats
Fixing: Set of 4 Stainless Anchoor Bolts
for Installation Fixed onto Tarmac and Hoggin Surface
Capacity: 120 Litres
Code: BX17 4030
- Existing Public Footpath Stile
- Proposed Allocated Space for Mobile Food/drink Van
- Proposed Walkway Pergola
Supplier: Langley Design Sheldon Pergola
Finish: Hardwood iroko slat / stainless steel frame
Fixing: Root Fixed
Size: H3140 X W2500 X L7540
Ref: SPG300
- Proposed Hypar Fabric Canopy
Supplier: Street space group
Colour: Vanilla
Finish: Powder coated frame RAL 7016
Size: (see plan for dimensions)
Installed to supplier requirements
- Proposed 1m High Planter
Stratum Versatile Planter
Supplier: Street Design
Colour: RAL 7016 Anthracite Grey
Finish: Aluminum Planters
Size: H1000 x (see plan for dimensions)
- Proposed Circular Planter
Supplier: Street Design or Similar
Colour: RAL 7016 Anthracite Grey
Finish: Aluminum Planters
Size: H800 x 1200mm
- Proposed Rocks / Boulders
Product: Recumbent Boulders
Cornish Glacial Granite
Size: 0.5 - 1.5m wide
Weight: 0.5MT - 0.75MT
0.45m High Timber Knee Rail
Posts for diamond / knee rail fencing with birds mouth top, 100 x 100mm section, softwood planed finish. Galvanised strap to secure post to rails with 50mm nails.
Rails: 75 x 75mm nominal section, 1.8m long. (posts are set at 1.35m centres)
- Proposed Timber Bollard
Grass Mound Gradient and Height to be Constructed in Line with 1:3 planting requirements.
Horizontal root barriers to be included at base for Archeological area protection.
- Archeological Area Boundary

Planting Schedule

Trees	Number	Abbreviation	Species	Specification	Height	Pot Size	Density	%
	3	A lam	Amelanchier lamarckii	Advanced Nursery Stock: Multistem 3 stems: Clear Stem min. 150	3.5-4.0m			
	18	ACE ELS	Acer campestre 'Elsrijk'	Advanced Nursery Stock: Clear Stem min. 200	16-18cm	4.0-4.5m		
	6	AcStr	Acer campestre 'Streetwise'	Advanced Nursery Stock: Clear Stem min. 200	16-18cm	4.0-4.5m		
	7	BEPE	Betula pendula	Advanced Nursery Stock: Clear Stem min. 200	16-18cm	4.0-4.5m		
	4	BET PUB	Betula pubescens	Advanced Nursery Stock: Clear Stem min. 200	16-18cm	4.0-4.5m		
	4	CARBETC	Carpinus betulus 'Columnaris'	Advanced Nursery Stock: Clear Stem min. 200	16-18cm	4.0-4.5m		
	1	CERCA	Cercis canadensis	Heavy Standard: Clear Stem min. 200	12-14cm	3.5-4.0m		
	1	CERCAF	Cercis canadensis 'Forest Pansy'	Heavy Standard: Clear Stem min. 200	12-14cm	3.5-4.0m		
	8	CERSIB	Cercis siliquastrum 'Bodnant'	Advanced Nursery Stock: Clear Stem min. 200	16-18cm	4.0-4.5m		
	2	MALTS	Malus tschonoskii	Heavy Standard: Clear Stem min. 200	12-14cm	3.5-4.0m		
	6	Pac	Prunus 'Acolade'	Advanced Nursery Stock: Clear Stem min. 200	16-18cm	4.0-4.5m		
	1	PaP	Prunus avium 'Plena'	Advanced Nursery Stock: Clear Stem min. 200	16-18cm	4.0-4.5m		
	2	SORAU	Sorbus aucuparia 'Cardinal Royal'	Advanced Nursery Stock: Clear Stem min. 200	16-18cm	4.0-4.5m		
Total	63							

Shrubs	Number	Abbreviation	Species	Specification	Height	Pot Size	Density	%
	68	Cc	Cistus corbariensis	Bushy: 3/4 brks	30-40cm	5L	4/m ²	
	57	CORSAMF	Cornus sanguinea 'Midwinter Fire'	Branched: 7/8 brks	60-80cm	10L	3/m ²	
	7	CORSAMF	Cornus sanguinea 'Midwinter Fire'	Branched: 7/8 brks	60-80cm	10L	Counted	
	67	CORSTKEG	Cornus stolonifera 'Kelsey Gold'	Branched: 6/7 brks	60-80cm	10L	3/m ²	
	33	EeGE	Elaeagnus ebbingei 'Gilt Edge'	Bushy: 6/7 brks	60-80cm	10L	3/m ²	
	76	EfEnG	Euonymus fortunei 'Emerald n' Gold'	Bushy: 3/4 brks	30-40cm	5L	3/m ²	
	95	HEBRA	Hebe rakaiensis	Bushy: 5/6 brks	30-40cm	10L	3/m ²	
	98	LAVANDB	Lavandula angustifolia 'Dwarf Blue'	Bushy: 3/4 brks	30-40cm	5L	4/m ²	
	65	MAA	Mathonia aquifolium 'Apollo'	Bushy: 3/4 brks	30-40cm	5L	3/m ²	
	6	P Y W	Phormium 'Yellow Wave'	15 leaves: C	100-125cm	10L	Counted	
	4	PHORS	Phormium tenax 'Rainbow Sunrise'	15 leaves: C	100-125cm	10L	Counted	
	26	PHOTEV	Phormium tenax 'Vareigatum'	15 leaves: C	100-125cm	10L	Counted	
	78	SARHODIPS	Sarcococca hookerana digy. 'Purple Stem'	Bushy: 4/5 brks	30-40cm	5L	3/m ²	
	72	SJRu	Skimmia japonica 'Rubella'	Bushy: 5/6 brks	30-40cm	5L	3/m ²	

Herbaceous	Number	Abbreviation	Species	Specification	Pot Size	Density	%
	61	GEROXATJ	Geranium oxonianum 'A T Johnson'	4 Buds: Full Pot	3L	4/m ²	
	224	HAKAURA	Hakonechloa macra 'Aureola'	4 Buds: Full Pot	5-7.5L	4/m ²	
	17	MISSISI	Miscanthus sinensis 'Silberturm'	7 Buds: Full Pot	5-7.5L	Counted	
	76	NEPGIAA	Nepeta 'Six Hills Giant'	4 Buds: Full Pot	5-7.5L	4/m ²	

Ferns	Number	Abbreviation	Species	Specification	Pot Size	Density	%
	236	M st	Matteuccia struthiopteris	Full Pot	3L	6/m ²	
	56	POLSE	Polystichum setiferum	Full Pot	3L	6/m ²	

Climbers	Number	Abbreviation	Species	Specification	Height	Pot Size	%
	21	TRAJA	Trachelospermum jasminoides	Several Shoots: 5 brks	200-250cm	10L	
Total	21						

Elaeagnus Hedge	Number	Abbreviation	Species	Specification	Height	Pot Size	Density	%
	662	EeGE	Elaeagnus ebbingei 'Gilt Edge'	Bushy: 3/4 brks	60-80cm	10L	3/m	

RED ROBIN HEDGE	Number	Abbreviation	Species	Specification	Height	Pot Size	Density	%
	597	PfRR	Photinia fraseri 'Red Robin'	Bushy: 4/6 brks: Clipped level at 0.5m high	60-80cm	10L	4/m	
Total	597							

Sweet Box Hedge	Number	Abbreviation	Species	Specification	Height	Pot Size	Density	%
	177	SARCO	Sarcococca confusa	Bushy: 3/6 brks	40-60cm	5L	4/m	
Total	177							

Yew Hedge	Number	Abbreviation	Species	Specification	Height	Pot Size	Density	%
	122	TAXB	Taxus baccata	Bushy: 3/4 brks	C:30-40cm	3L	4/m	

Medium Mix 1	Number	Abbreviation	Species	Specification	Height	Pot Size	Density	%
	15	BRASU	Brachyglottis 'Sunshine'	Bushy: 2/4 brks	30-40cm	5L	3/m ²	15%
	20	EISQ	Euonymus fortunei 'Silver Queen'	Bushy: 4/5 brks	30-40cm	10L	3/m ²	20%
	24	LaH	Lavandula angustifolia 'Hiicote'	Bushy: 3/4 brks	30-40cm	5L	3/m ²	25%
	15	POTFRABW	Potentilla fruticosa 'Abbotswood White'	Bushy: 3/4 brks	30-40cm	5L	3/m ²	15%
	24	ROSOFMUJ	Rosmarinus officinalis 'Miss Jessopp's Upright'	Bushy: 3/4 brks	30-40cm	5L	3/m ²	25%
Total	98							

Large Mix 3	Number	Abbreviation	Species	Specification	Height	Pot Size	Density	%
	78	CHOTE	Choisya ternata	Bushy: 3/4 brks	60-80cm	5-7.5L	3/m ²	20%
	78	CORSAMF	Cornus sanguinea 'Midwinter Fire'	Bushy: 3/4 brks	60-80cm	5-7.5L	3/m ²	20%
	78	CORSTKEG	Cornus stolonifera 'Kelsey Gold'	Bushy: 3/4 brks	60-80cm	5-7.5L	3/m ²	20%
	78	Ob	Osmanthus burkwoodii	Bushy: 5/6 brks	60-80cm	10L	3/m ²	20%
	78	PRRR	Photinia fraseri 'Red Robin'	Bushy: 3/4 brks	60-80cm	5-7.5L	3/m ²	20%
Total	390							

Native Hedge Mix	Number	Abbreviation	Species	Specification	Height	Density	%
	32	Cav	Corylus avellana	BR: Double staggered row	60-80cm	5/m	10%
	156	Cmo	Crataegus monogyna	BR: Double staggered row	60-80cm	5/m	50%
	47	LIGVU	Ligustrum vulgare	BR: Double staggered row	60-80cm	5/m	15%
	32	PRRUSP	Prunus spinosa	BR: Double staggered row	60-80cm	5/m	10%
	32	VIBLA	Viburnum lantana	BR: Double staggered row	60-80cm	5/m	10%
	16	VIBOP	Viburnum opulus	BR: Double staggered row	60-80cm	5/m	5%
Total	315						

Native Shrub Mix	Number	Abbreviation	Species	Specification	Height	Density	%
	12	CORSA	Cornus sanguinea	BR: Branched 2/3 brks	1+160-80cm	3/m ²	
	9	Cav	Corylus avellana	BR: Branched 2/3 brks	1+160-80cm	3/m ²	
	9	LIGVU	Ligustrum vulgare	BR: Branched 2/3 brks	1+160-80cm	3/m ²	
	9	PRRUSP	Prunus spinosa	BR: Branched 2/3 brks	1+160-80cm	3/m ²	
	9	RHACA	Rhamnus cathartica	BR: Branched 2/3 brks	1+160-80cm	3/m ²	
	6	VIBLA	Viburnum lantana	BR: Branched 2/3 brks	1+160-80cm	3/m ²	
	6	VIBOP	Viburnum opulus	BR: Branched 2/3 brks	1+160-80cm	3/m ²	
Total	60						

Native Bulb Mix	Number	Abbreviation	Species	Specification	Density	%
	265	GALRI	Galanthus nivalis	Grade 4/6	25/m ²	25%
	265	HyaNoSc	Hyacinthoides non-scripta	Grade 4/6	25/m ²	25%
	627	NARPSE	Narcissus pseudonarcissus	Grade 4/6	25/m ²	50%
Total	1057					

Prairie Mix 1	Number	Abbreviation	Species	Specification	Height	Pot Size	Density	%
	232	ACHTE	Achillea 'Terracotta'	7 Buds: Full Pot	5L	7/m ²	20%	
	119	CALACKF	Calamagrostis acutiflora 'Karl Foerster'	Full Pot	30-40cm	5-7.5L	7/m ²	10%
	232	ECHPUWS	Echinacea purpurea 'White Swan'	7 Buds: Full Pot	5L	7/m ²	20%	
	232	SALNELU	Salvia nemorosa 'Lobelia'	7 Buds: Full Pot	5L	7/m ²	20%	
	346	STI TAI	Stipa tenuissima 'Pony Tails'	Full Pot	30-40cm	5-7.5L	7/m ²	30%
Total	1161							

Prairie Mix 2	Number	Abbreviation	Species	Specification	Height	Pot Size	Density	%
	69	C b	Calamagrostis brachytricha	Full Pot	30-40cm	10L	7/m ²	10%
	136	E pu M	Echinacea purpurea 'Magnus'	7 Buds: Full Pot	5L	7/m ²	20%	
	136	HELMOB	Helenium 'Moerheim Beauty'	7 Buds: Full Pot	5L	7/m ²	20%	
	136	R f s G	Rudbeckia fulgida sultivanti 'Goldsturm'	7 Buds: Full Pot	5L	7/m ²	20%	
	204	STI TAI	Stipa tenuissima 'Pony Tails'	Full Pot	30-40cm	5-7.5L	7/m ²	30%
Total	681							

Shade Mix 1	Number	Abbreviation	Species	Specification	Height	Pot Size	Density	%
	48	ACAMO	Acanthus mollis	Full Pot	5-7.5L	8/m ²	5%	
	94	A mo	Alchemilla mollis	Full Pot	5-7.5L	8/m ²	10%	
	229	BLESP	Blechnum spicant	Full Pot	5-7.5L	8/m ²	25%	
	185	BRUCREA	Brunnera macrophylla 'Hadsphen Cream'	Full Pot	5-7.5L	8/m ²	20%	
	94	DRY MAS	Dryopteris filix-mas	Full Pot	5-7.5L	8/m ² </		