


Legend

- Existing trees to be retained and protected during construction. Refer to Tree Protection Plan HAY23648-03 for further details
- Proposed tree planting within soft landscape. See tree pit detail on sheet 1
- Proposed specimen shrub planting
- Proposed climbing plants to be trained up adjacent wall/ fence with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed hedge planting to be planted in a single row at 400mm centres
- Proposed *Carpinus* (hornbeam) hedge planting to be planted in a double staggered row 300mm apart and at 400mm centres in each row. To be maintained at 1m height
- Proposed mixed native hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1.8m height
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed aquatic mix to be planted in groups of 7-10no. of each species and as above
- Proposed sensory shrub mix to be planted in groups of 5-7no. of each species and as above
- Proposed native woodland and understorey to be planted in groups of 5-7no. of each species and as above
- Proposed native thicket mix to be planted in groups of 5-7no. of each species and as above
- Proposed decorative mix bulb planting, to be planted in Autumn at three times the depth of the bulb
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Proposed grassland areas to be seeded with EG22 Strong Lawn Grass Mixture as supplied by Emorsgate or similar and sown at 25 grams per msq
- Proposed areas to be seeded with EM2 Standard General Purpose Meadow Mixture as supplied by Emorsgate or similar and sown at 4 grams per msq
- Proposed areas to be seeded with EM8 Meadow Mixture for Wetlands as supplied by Emorsgate or similar and sown at 4 grams per msq
- Proposed areas to be seeded with EG10 Tussock Grass Mixture for Wetlands as supplied by Emorsgate or similar and sown at 5 grams per msq
- Proposed areas to be seeded with EH1 Hedgerow Mixture as supplied by Emorsgate or similar and sown at 4 grams per msq
- Proposed grass matta safety surfacing as supplied by Matta products or similar. To be laid to critical fall heights
- Proposed footpaths to be laid with self binding breedon gravel. To be edged with AluExcel aluminum edging, as supplied by Excel Edge or similar and laid in line with engineers details
- Proposed footpath to be laid with resin bound gravel as supplied by SureSet or similar. Laid to engineers detail
- Proposed knee rail to be 450mm high as supplied by Jacksons Fencing or similar. To include maintenance gates
- Proposed root barrier to be ReRoot 2000 as supplied by GreenBlue Urban or similar
- Proposed Willenhall Seat, product ref: BX14 4015 and Westleigh Litter Bin, product ref: BX50S 2800 as supplied by Broxap or similar
- Cut lines
- For Planting Schedule refer to sheet 1 of 3

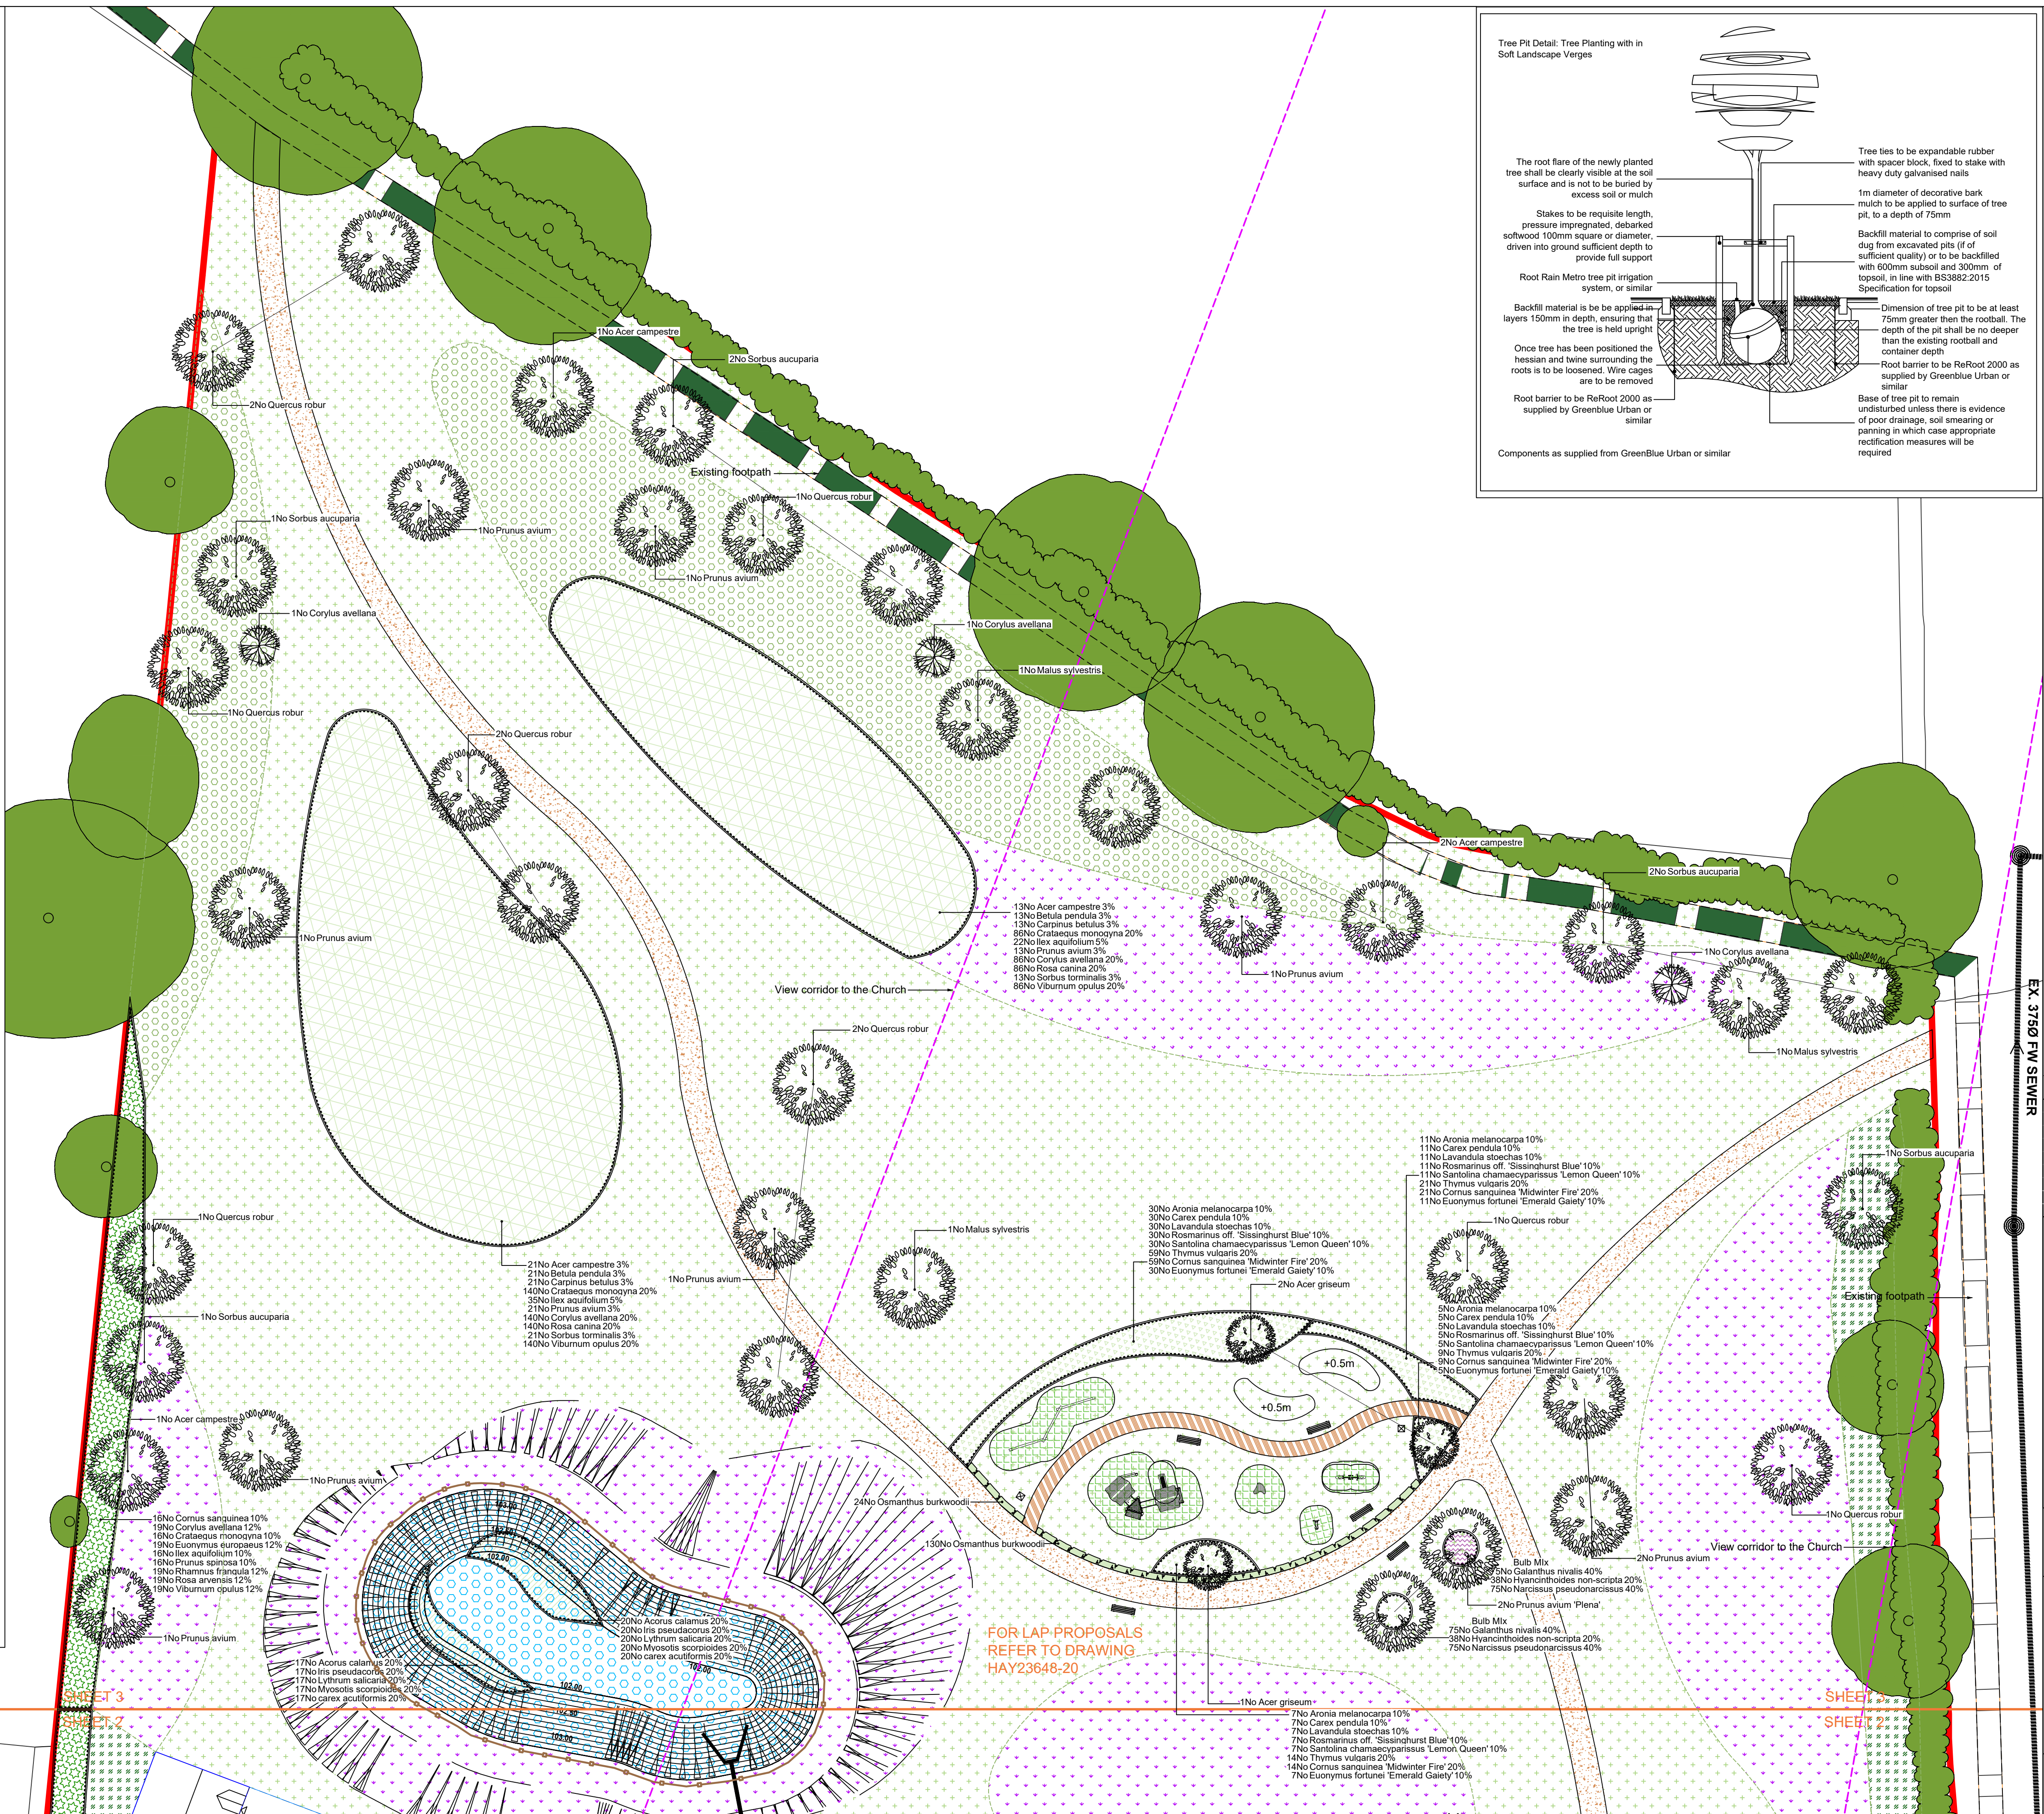

SPECIFICATION

All works generally, to comply with the written Soft Landscape Specification.

In case of quantity discrepancies, the quantities on the plan(s) take precedent over the quantities shown in the planting schedule.

NOTES:

DO NOT SCALE FROM DRAWING

NOT FOR CONSTRUCTION, FOR PLANNING PURPOSES ONLY



A	26.08.22	Layout revision and LPA comments	SR
Rev	Date	Details	Drawn



HEAD OFFICE

Rodbourn Rail Business Centre, Grange Lane,

Malmesbury, SN16 0ES

Tel: 01666 825646

4 & 5 The Old Mill, Fry's Yard, Bridge Street,

Codralming, GU7 1HP

Tel: 01485 425714

Suite 6, Crescent House, Yonge Close,

Eastleigh, SO50 95X

Tel: 02382 026300

email: mail@acdenv.co.uk

www.acdenvironmental.co.uk



scheme: Land off Berry Hill Road,

Adderbury, Banbury

client: Hayfield Homes

drawing: Landscape Proposals

date: March 2022

scale: 1:200@A1

drawing no: HAY23648-11A Sheet 3 of 3

drawn: SR checked: JC

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2011. Copyright of this plan remains with ACD until all fees have been paid in full.