Legend

- Existing trees to be retained and protected during construction. Refer to Tree Protection Plan HAY23648-03 for further details
- Proposed tree planting within soft landscape. See tree pit detail on sheet 1
- Proposed specimen shrub planting
- Proposed climbing plants to be trained up adjacent wall/ fence with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed hedge planting to be planted in a single row at 400mm centres
- Proposed *Carpinus* (hornbeam) hedge planting to be planted in a double staggered row 300mm apart and at 400mm centres in each row. To be maintained at 1m height
- Proposed mixed native hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1.8m height
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed aquatic mix to be planted in groups of 7-10no. of each species and as above
- Proposed sensory shrub mix to be planted in groups of 5-7no. of each species and as above
- Proposed native woodland and understorey to be planted in groups of 5-7no. of each species and as above
- Proposed native thicket mix to be planted in groups of 5-7no. of each species and as above
- Proposed decorative mix bulb planting, to be planted in Autumn at three times the depth of the bulb
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Proposed grassland areas to be seeded with EG22 Strong Lawn Grass Mixture as supplied by Emorsgate or similar and sown at 25 grams per msq
- Proposed areas to be seeded with EM2 Standard General Purpose Meadow Mixture as supplied by Emorsgate or similar and sown at 4 grams per msq
- Proposed areas to be seeded with EM8 Meadow Mixture for Wetlands as supplied by Emorsgate or similar and sown at 4 grams per msq
- Proposed areas to be seeded with EG10 Tussock Grass Mixture for Wetlands as supplied by Emorsgate or similar and sown at 5 grams per msq
- Proposed areas to be seeded with EH1 Hedgerow Mixture as supplied by Emorsgate or similar and sown at 4 grams per msq
- Proposed grass matta safety surfacing as supplied by Matta products or similar. To be laid to critical fall heights
- Proposed footpaths to be laid with self binding breedon gravel. To be edged with AluExcel aluminum edging, as supplied by Excel Edge or similar and laid in line with engineers details
- Proposed footpath to be laid with resin bound gravel as supplied by SureSet or similar. Laid to engineers detail
- Proposed knee rail to be 450mm high as supplied by Jacksons Fencing or similar. To include maintenance gates
- Proposed root barrier to be ReRoot 2000 as supplied by GreenBlue Urban or similar
- Proposed Willenhall Seat, product ref: BX14 4015 and Westleigh Litter Bin, product ref: BX50S 2800 as supplied by Broxap or similar
- Cut lines

For Planting Schedule refer to sheet 1 of 3

Planting Schedule

Trees

Species Name	Girth	Height	Density	Specification	No.
Corylus avellana		40-60cm	0.3Ctr Double Staggered at 0.3m offset	Transplant :RB; Planted and maintained as a hedgerow	41 -
Crataegus monogyna		40-60cm	1/m²	1+1 :Feather :BR	66 -
Ilex aquifolium		40-60cm	1/m²	Bushy :C	66 -
Crataegus monogyna		60-80cm	0.3Ctr Double Staggered at 0.3m offset	Transplant :RB; Planted and maintained as a hedgerow	61 -
Carpinus betulus		100-125cm	0.4Ctr Double Staggered at 0.3m offset	1+2 :Transplant :BR; Planted and maintained as a hedgerow	169 -
Betula pendula	8-10cm	200-300cm	1/m²	Light Standard: 2x: BR	34 -
Prunus avium	8-10cm	200-300cm	1/m²	Light Standard: 2x: BR	34 -
Magnolia soulangiana	10-12cm	300-350cm	Counted	Selected Standard :Clear Stem 175-200 :3x :RB	4 -
Prunus 'Amanogawa'	10-12cm	300-350cm	Counted	Standard :3x :RB	10 -
Pyrus calleryana 'Chanticleer'	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem 175-200 :5 brks :3x :RB	13 -
Acer griseum	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem 175-200 :5 brks :3x :RB	3 -
Prunus avium	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :3/5 brks :3x :RB	18 -
Quercus robur	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :3/5 brks :3x :RB	15 -
Malus sylvestris	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :3/5 brks :3x :RB	3 -
Acer campestre	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :3/5 brks :3x :RB	8 -
Carpinus betulus	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :3/5 brks :3x :RB	1 -
Sorbus aucuparia	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :3/5 brks :3x :RB	11 -
Prunus avium 'Plena'	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem 175-200 :5 brks :3x :RB	2 -
Acer campestre	20-25cm	500-550cm	1/m²	Semi mature: 3x: RB	34 -
Carpinus betulus	20-25cm	500-550cm	1/m²	Semi mature: 3x: RB	34 -
Sorbus torminalis	20-25cm	500-550cm	1/m²	Semi mature: 3x: RB	34 -

Shrubs

Species Name	Height	Pot Size	Specification	Density	No.
Abelia grandiflora 'Kaleidoscope'	40-60cm	5-7.5L	Bushy :5 brks :C	4/m²	58 -
Aronia melanocarpa	30-40cm	3L	Bushy: C	4/m²	53 -
Ceanothus 'Blue Mound'	40-60cm	5-7.5L	Bushy :5 brks :C	4/m²	52 -
Choisya 'Aztec Pearl'	40-60cm	5-7.5L	Bushy :5 brks :C	4/m²	75 -
Cistus 'Silver Pink'	40-60cm	5-7.5L	Bushy :6 brks :C	4/m²	42 -
Cornus sanguinea	40-60cm	3L	Branched :BR; Planted and maintained as a hedgerow	0.3Ctr Double Staggered at 0.3m offset	41 -
Cornus sanguinea	40-60cm		1+1 :Feather :BR	1/m²	66 -
Cornus sanguinea 'Midwinter Fire'	40-60cm	3L	Branched :5 brks :C	4/m²	50 -
Cornus sanguinea 'Midwinter Fire'	30-40cm	3L	Bushy: C	4/m²	103 -
Corylus avellana	125-150cm	15L	Branched :7 brks :C	Counted	6 -
Corylus avellana	80-100cm		Transplant: BR	1/m²	226 -
Corylus avellana	40-60cm		1+1 :Feather :BR	1/m²	79 -
Crataegus monogyna	100-125cm		Transplant: BR	1/m²	226 -
Euonymus europaeus	40-60cm		1+1 :Feather :BR	1/m²	79 -
Euonymus fortunei 'Emerald Gaiety'	30-40cm	3L	Bushy: C	4/m²	53 -
Euonymus fortunei 'Silver Queen'	30-40cm	5-7.5L	Bushy :9 brks :C	4/m²	230 -
Exochorda macrantha 'The Bride'	60-80cm	15L	Bushy :8 brks :C; Planted as a specimen shrub	Counted	8 -
Hebe 'Midsummer Beauty'	40-60cm	5-7.5L	Bushy :7 brks :C	4/m²	73 -
Hebe 'Red Edge'	40-60cm	5-7.5L	Bushy :7 brks :C	4/m²	61 -
Ilex aquifolium	100-125cm	15L	Leader and laterals: C	1/m²	57 -
Ilex crenata	30-40cm	3L	Leader With Laterals :C; Planted and maintained as a hedgerow	4/m	1237 -
Lavandula angustifolia 'Hidcote'	30-40cm	5-7.5L	Bushy :7 brks :C	4/m²	199 -
Lavandula stoechas	30-40cm	3L	Bushy: C	4/m²	53 -
Nandina domestica 'Firepower'	40-60cm	5-7.5L	Bushy :5 brks :C	4/m²	43 -
Osmanthus burkwoodii	30-40cm	3L	Bushy :C; Planted and maintained as a hedgerow	4/m	154 -
Prunus cistena	60-80cm	10L	Branched :5 brks :C; Planted as a specimen shrub	Counted	8 -
Prunus laurocerasus 'Otto Luyken'	40-60cm	5-7.5L	Bushy :5 brks :C	4/m²	187 -
Prunus spinosa	40-60cm		1+1 :Feather :BR	1/m²	66 -
Rhamnus frangula	40-60cm		1+1 :Feather :BR	1/m²	79 -
Rosa arvensis	60-80cm		1+1 :Feather :BR	1/m²	79 -
Rosa canina	80-100cm		Branched :BR; Planted and maintained as a hedgerow	0.3Ctr Double Staggered at 0.3m offset	21 -
Rosa canina	80-100cm		Transplant: BR	1/m²	226 -
Rosmarinus off. 'Sissinghurst Blue'	30-40cm	3L	Bushy: C	4/m²	53 -
Santolina chamaecyparissus 'Lemon Queen'	30-40cm	3L	Bushy: C	4/m²	53 -
Skimmia japonica 'Rubella'	40-60cm	5-7.5L	Bushy :5 brks :C	4/m²	223 -
Viburnum opulus	60-80cm		Branched :BR; Planted and maintained as a hedgerow	0.3Ctr Double Staggered at 0.3m offset	41 -
Viburnum opulus	80-100cm		Transplant: BR	1/m²	226 -
Viburnum opulus	40-60cm		1+1 :Feather :BR	1/m²	79 -

Climbers

Species Name	Height	Pot Size	Specification	Density	No.
Clematis armandii 'Apple Blossom'	80-100cm	15L	Several Shoots :7 brks :C	Counted	23 -
Lonicera periclymenum 'Graham Thomas'	100-150cm	10L	Several Shoots :5 brks :C	Counted	7 -

Herbaceous

Species Name	Height	Pot Size	Specification	Density	No.
Bergenia 'Bressingham White'		5-7.5L	C	4/m²	102 -
Carex pendula		3L	Bushy: C	4/m²	53 -
Thymus vulgaris		3L	Bushy: C	4/m²	103 -

Bulbs

Species Name	Specification	Density	No.
Galanthus nivalis	Topsize	30/m²	333 -
Hyacinthoides non-scripta	Topsize	30/m²	168 -
Narcissus pseudonarcissus	Topsize	30/m²	333 -

Marginal / Aquatics

Species Name	Pot Size	Specification	Density	No.
Acorus calamus	3-3.5L	Well Rooted	3/m²	37 -
Carex acutiformis	3-3.5L	Well Rooted	3/m²	37 -
Iris pseudacorus	3-3.5L	Well Rooted	3/m²	37 -
Lythrum salicaria	3-3.5L	Well Rooted	3/m²	37 -
Myosotis scorpioides	3-3.5L	Well Rooted	3/m²	37 -

Tree Pit Detail: Soft Landscape

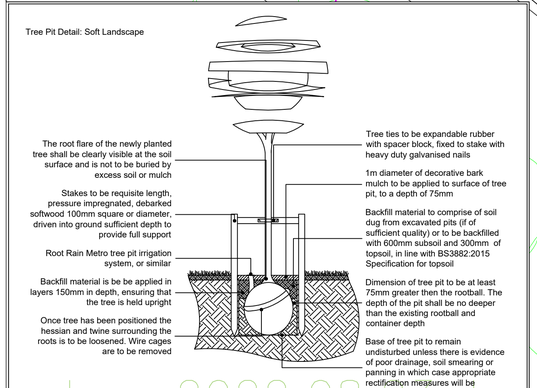

Components as supplied from GreenBlue Urban or similar

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.

In case of quantity discrepancies, the quantities on the plan(s) take precedent over the quantities shown in the planting schedule.

NOTES:
DO NOT SCALE FROM DRAWING
NOT FOR CONSTRUCTION, FOR PLANNING PURPOSES ONLY

See sheet 3 of 3 for tree pit detail of trees within verges

Rev	Date	Details	Drawn
A	26.08.22	Layout revision and LPA comments	SR

ACD ENVIRONMENTAL

HEAD OFFICE
Rodbourne Rail Business Centre, Grange Lane, Malmesbury, SN16 0ES
Tel: 01666 825646

4 & 5 The Old Mill, Fry's Yard, Bridge Street, Godalming, GU7 1HP
Tel: 01483 425714

Suite 6, Crescent House, Yonge Close, Eastleigh, SO50 9SX
Tel: 02382 026300

email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

HAYFIELD

scheme: Land off Berry Hill Road, Adderbury, Banbury
client: Hayfield Homes
drawing: Landscape Proposals
date: March 2022
scale: 1:200@A1
drawing no: HAY23648-11A Sheet 1 of 3
drawn: SR checked: JC

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2011. Copyright of this plan remains with ACD until all fees have been paid in full.