

Vinci Play
Puck Spinner
PVL9042-A-PT

Vinci Play
Timber Seesaw
PVR5002-A-PT

Vinci Play
Timber Swing
PVR1218-B-PT



Vinci Play
Timber Swings, 1 x Cradle, 1 x Flat
PVR1233-B-S

Vinci Play
Timber Basic Tower
PVR1041-A-S

Vinci Play
Whirl Roundabout
PVL6002-A-WL

Broxap
Medway Seat
BX14 4026

Broxap
Derby E Slimline Litter Bin
BX45 2596-E-90

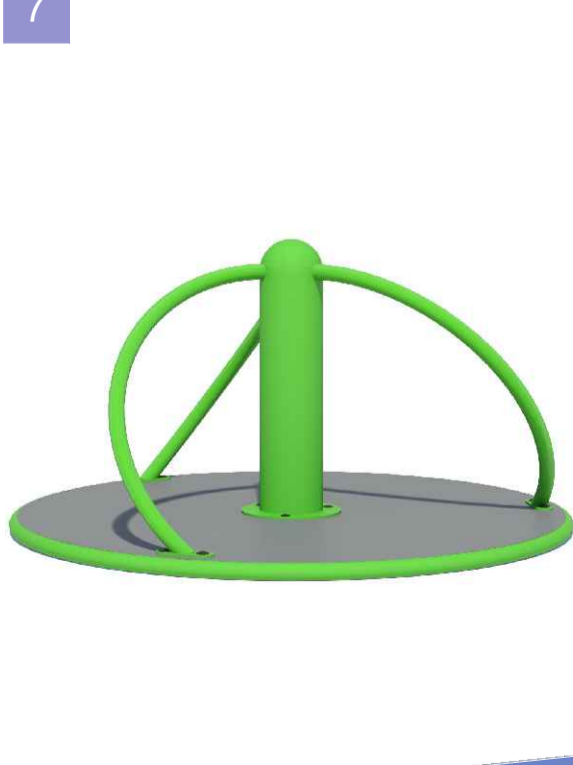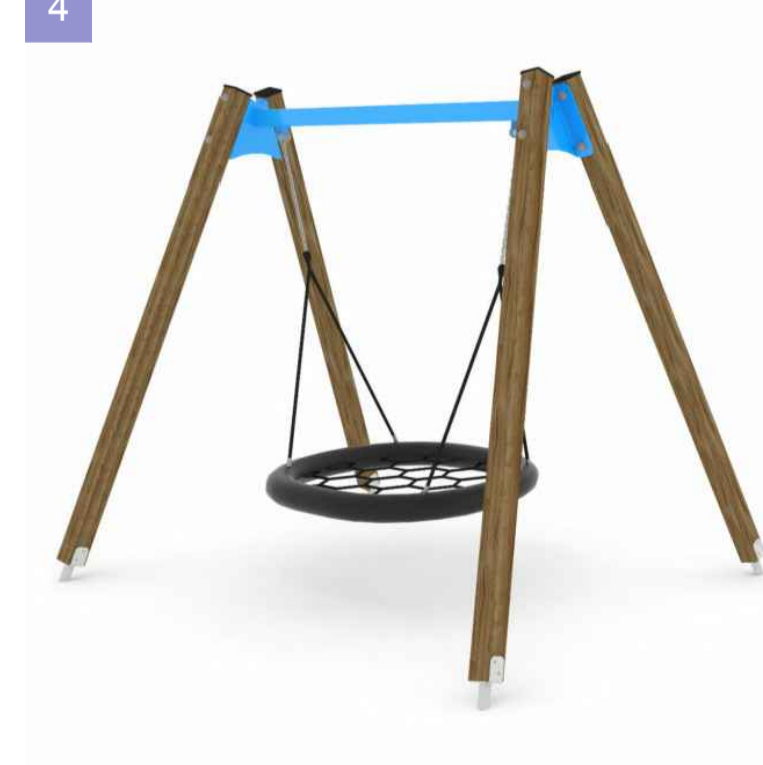

Revision			
A	Site redesigned due to new budget	AW	17.10.18
B	Site redesigned to client's comments	PL	21.11.18
C	Site redesigned to client's comments	AW	26.04.19
D	Site redesigned with new kit	AG	31.05.19
E	Surfacing amendment around single gate	AM	01.07.19

- A** Signage to be secured at the entrance in to the play space, detail TBA
- B** Premium grade turf to area within fence line
- C** Mounding works up to 0.5m height created using spoil generated on site. Additional suitable fill and topsoil by others if required.
- D** Grass matting 'ecosmart' surfacing provides a safer surface for the play equipment whilst preventing wear. This will include a shockpad where fall heights are 1.8m high or greater.
- E** Rubber bonded eco mulch, colour TBC, laid over 50mm MOT type 1 with edges cut into turf - depth of 40mm to relate to the appropriate free fall heights
- F** 'No Dogs' paving slab, to be laid at site entrances
- G** Play Spec 1m High galvanised and powdercoated Black Bowtop Fencing
- H** Single leaf hydraulic Pro-Safe self closing pedestrian access gate 1.2m wide in red for partially sighted users
- I** Double leaf combination maintenance gate 3m wide c/w hydraulic Pro-Safe self closer on one leaf in red for partially sighted users
- J** Softworks by others
- K** Main pathways by others
- L** Existing tree to remain

Images are an indicative representation, colours and specification subject to change