APPENDIX H.Traffic Modelling Reports



Technical Note – Traffic Modelling Outcomes Summary

Project No:	ITB16565
Project Title:	PR Sites Strategic Modelling
Title:	Traffic Modelling Outcomes Summary
Ref:	ITB16565-030B
Date:	17 July 2023

SECTION 1 Introduction

1.0.0 This Technical Note sets out the traffic modelling outcomes to support planning applications associated with the sites to the north of Oxford allocated in the Cherwell District Council (CDC) Local Plan Part 1 Partial Review, referred to collectively as the 'PR sites'. Figure 1.1 shows the location of the PR sites included within this traffic modelling assessment.

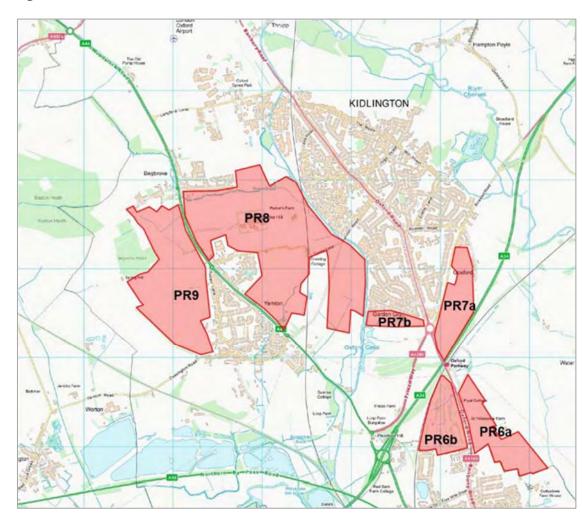


Figure 1.1: Location of the PR sites

- 1.0.1 Oxfordshire County Council (OCC) has requested that the North Oxford VISSIM model is used to assess the impact of development generated traffic on the operation of the highway network in a future year once all of the PR sites are completed.
- 1.0.2 Traffic modelling has been undertaken collaboratively between the following consultants:
 - i-Transport LLP on behalf of PR6A
 - Vectos on behalf of PR9
 - KMC on behalf of PR6B and PR8 (Oxford University Development (OUD))
 - Glanville on behalf of PR8 (Hallam)
 - Brookbanks on behalf of PR7a
 - Vectos Microsimulation transport modellers for the PR sites.
- 1.0.3 This note provides a summary of the results which have been extracted from the VISSIM modelling. It is intended that the future year modelling is utilised to determine whether the transport mitigation set out within the Infrastructure Delivery Plan (IDP), which is included as Appendix 4 of the Local Plan Part 1 Partial Review, is required and / or whether alternative mitigation beyond that currently envisaged is required.
- 1.0.4 This note follows the information presented within the modelling specification note which was submitted to OCC for review (*report reference: ITB16565-013*). OCC raised comments on 21 April 2022 and those comments have been taken account of in subsequent modelling assessments. Subsequently VISSIM modelling was submitted to OCC on 13th December 2022, assessing the effects of the PR sites, and OCC provided a model audit report on 31st January 2023. Further amendments were made to the VISSIM modelling to take account of the OCC model audit. This note provides a summary of the updated VISSIM modelling outcomes following the amendments made to respond to the OCC model audit and comments from OCC highway officers.
- 1.0.5 Along with the modelling results, Vectos MicroSim has produced a number of separate technical notes, which provide further information (provided separately):
 - Forecasting Report Appendix A
 - Forecast Capping Discussion Note Appendix B
 - Mode Shift Discussion Note Appendix C
 - Response to OCC Model Audit Note Appendix D
- 1.0.6 The remainder of this technical note is structured as followed:

- Section Two Provides an overview of the traffic model;
- Section Three Sets out the agreed modelling approach and deliverables;
- **Section Four** Summarises the findings of the modelling in terms of network statistics, queuing, journey time and Level of Service; and
- **Section Five** Provides a summary and conclusion.

SECTION 2 Overview of North Oxford VISSIM Model

2.0.0 As agreed with Oxfordshire County Council (OCC), the North Oxford VISSIM model is to be used to assess the cumulative impact of development generated traffic from the PR sites on the operation of the highway network.

2.1 Local Model Validation Report

- 2.1.0 OCC has provided the Local Model Validation Report (LMVR) that was prepared to support the North Oxford VISSIM model. The LMVR provides an overview of the development, calibration, and validation of the 2018 Base North Oxford VISSIM model.
- 2.1.1 The North Oxford VISSIM model is a micro-simulation model representing a large study area. The model is primarily formed of four key corridors including a 7km section of the A34 corridor, an 11km section of the A40 corridor, an 11km section of the A44-A4144 corridor and a 12km section of the A4260-A4165 corridor. The model extent is shown in **Image 2.1** below.

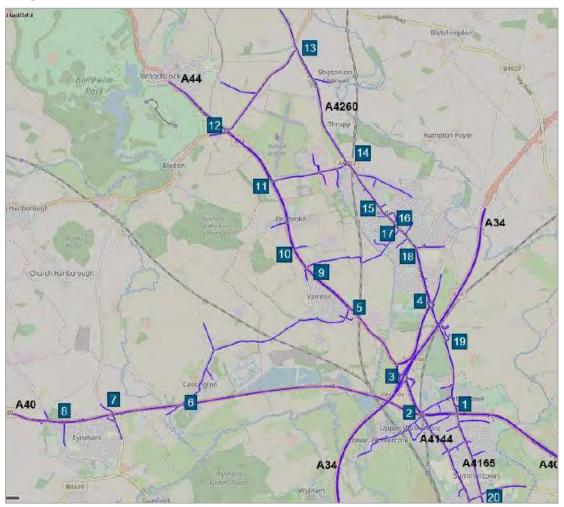


Image 2.1 North Oxford VISSIM Model Extent

2.1.2 The VISSIM model has been developed using the specifications shown in **Image 2.2** below.

Image 2.2 North Oxford VISSIM Model Specifications

Base Year:	2018								
Modelled Scenarios:	AM and PM Base year.								
Assignment:	Dynamic								
Modelled Time Periods:	06:30 - 10:30 and 14:30 - 18:30								
period has been modelled	A 30 minute (1800 simulation second) warm up to ensure that the traffic conditions in the model are evaluation period. AM between 06:30 – 07:00 and PM								
the purposes of model call 09:00 and 09:00 – 10:00 h hours of 15:00 – 16:00, 16	Evaluation Period: A three-hour evaluation period has been used for the purposes of model calibration. Individual hours of $07:00 - 08:00$, $08:00 - 09:00$ and $09:00 - 10:00$ have been assessed. For the PM peak individual hours of $15:00 - 16:00$, $16:00 - 17:00$ and $17:00 - 18:00$ have been assessed. The validation of the model is representative of a single hour $08:00 - 09:00$ (AM) and $17:00 - 18:00$ (PM)								
period has been modelled all demands during the eva	A 30 minute (1800 simulation second) cool down to ensure the accuracy of the model results and that aluation period are loaded onto the network. AM d PM between 18:00 – 18:30.								
Vehicle Types: The	following vehicle types have been modelled								
	ight vehicles – comprising cars and light goods vehicles (LGV); and								
- 1	Heavy vehicles – comprising of OGV1 and OGV2.								
	Buses – specified routing, timetables and bus stops for each service number.								
VISSIM Version:	10.00-12								

2.2 2023 Do Minimum Forecasting

2.2.0 The Modelling Options Report, North Oxford Corridor, March 2021 sets out details of the 2023 Forecasting (referred to as the 2023 Do Minimum). The future housing and employment development included in the 2023 matrices is shown below.

Map Zone	Housing	Size (Sqm or No. of Units)	VISSIM Zone	VSSIM Zone Description
1	Eynsham Garden Village	440	27	Cuckoo Lane and Lower Road
2	West of Thornbury Road Eynsham	160	25	Wintey Lane
3	Eynsham Nursery and Plant Centre	77	101	Elm Place - Dummy
4	Land East of Woodstock	113	31	New Zone
5a	Barton Park - Outline	104	12	A40 Northern By-pass Rd
5b	Barton Park - Reserved Matters Phase 1	123	12	A40 Northern By-pass Rd
6	PR6a - Land East of Oxford Road	75	10	Oxford Parkway
7	PR7b - Land at Stratfield Farm	75	8	Oxford Road
8	PR8 - Land East of the A44	150	106	Begbroke Science Park - Groveland
9	PR9 - Land West of Yarnton	105	29	Rutten Lane - Spring Hill Road
10	Wolvercote Papermill site	190	18	Godstow Road

Table 6.1: Housing Developments Included in Matrices

Table 6.2: Employment Developments Included in Matrices

Map Zone	Employment	Size (Sqm or No. of Units)	VISSIM Zone	VSSIM Zone Description
A	Begbroke Science Park	12,500	30	Begbroke Science Park
В	Oxford Technology Park	40,362	105	Oxford Moor Park
С	Oxford North	15,850	107	Peartree Park and Ride
D	Cotswold Garden Village/Eynsham Garden Village	0	27	Cuckoo Lane and Lower Road

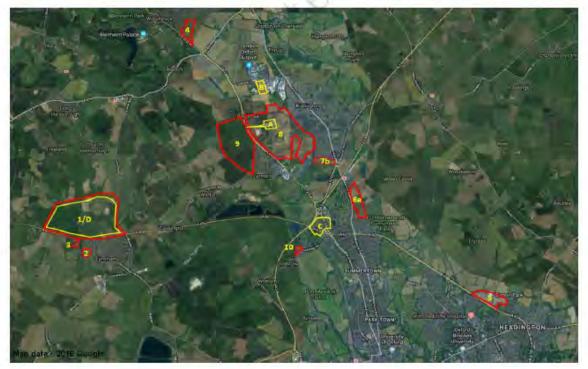


Figure 6.1: Housing Development Locations

- 2.2.1 The 2023 Do Minimum model therefore includes the majority of the PR sites, albeit the quantum of development included in the model relates to the predicted level of development in 2023 rather than the full allocation of the sites.
- 2.2.2 The 2023 modelling assumptions do not include other potential Growth Deal and Housing Infrastructure Fund (HIF) schemes coming forward including A40 HIF 2, Kidlington Roundabout improvements or A44 improvements (to and including Cassington Road junction). These schemes have been considered later in this note.

- 2.2.3 In terms of infrastructure, only high probability schemes that were expected to be built by 2023 were included in the model. These include the following:
 - Sandy Lane level crossing closure; and
 - A40 A44 Eastern Link Road.
- 2.2.4 In terms of the current status of the above schemes, Sandy Lane level crossing has yet to be closed and the A40-A44 Eastern Link Road is currently under construction. Network Rail is currently progressing a Transport and Works Act Order (TWAO) for the closure of the Sandy Lane level crossing.
- 2.2.5 It is understood that the North Oxford VISSIM model currently has no other forecast years and as such it has been necessary to develop additional future year assessments.

SECTION 3 Modelling Parameters

3.0 Introduction

- 3.0.0 The Local Plan Part 1 Partial Review runs to 2031. The PR sites are expected to be constructed and completed during this period up to 2031, albeit OUD's element of PR8 is expected to be completed shortly after by 2033. Therefore, the future horizon period will establish local highway network conditions, taking into account any appropriate background traffic growth, consented development traffic and PR site traffic upon full completion.
- 3.0.1 This section summarises the assumptions with regards to traffic growth and committed development, which have informed the Future Year Reference Case model, when all of the PR sites are completed. In addition, this section summarises the PR sites traffic generation that has been included in the Future Year Reference + PR sites model.

3.1 Model Scenarios

- 3.1.0 The following sets out the inclusions contained within each modelled scenario. For each scenario is a modelled AM and PM peak period. The AM simulates 06:30-10:30 with the 07:00-10:00 period assessed hourly, and the PM simulates 14:30-18:30 with the 15:00-18:00 period assessed hourly:
 - 2018 Base (as provided by Oxfordshire County Council (OCC))
 - Future Year Reference Case
 - Includes all committed developments as described in the Forecasting Report (Appendix A), with background traffic forecasting methodology as described in the Capping Discussion Note (Appendix B).
 - Future Year Do-Something Low Mode Shift
 - As above for the Future Year Reference Case, with background demands adjusted in line with low mode shift assumptions as set out in the Mode Shift Discussion Note (Appendix C) + PR sites traffic demand.
 - Future Year Do-Something Medium Mode Shift
 - As above for the Future Year Reference Case, with background demands adjusted in line with medium mode shift assumptions as set out in the Mode Shift Discussion Note (Appendix C) + PR sites traffic demand.

- Future Year Do-Something High Mode Shift
 - As above for the Future Year Reference Case, with background demands adjusted in line with high mode shift assumptions as set out in the Mode Shift Discussion Note (Appendix C) + PR sites traffic demand.

3.2 **Committed Development**

- 3.2.0 Section 3 of the Vectos MicroSim Forecasting report (Appendix A) sets out the assumptions in terms of committed development which have been included within the model. These were agreed with OCC as part of the initial scoping exercise and have been updated as part of this updated VISSIM modelling exercise to reflect comments from OCC (i.e. refinements to assumptions for Eynsham Garden Village trip generation and addition of a proposed development in Woodstock, which are set out in Appendix A).
- 3.2.1 It was agreed not to include vehicular trips forecast to be generated by other allocated sites in Oxford City or South Oxfordshire within the Future Year Reference Case model as these sites have the same status as the PR sites at the time of preparing the model (i.e., they are allocated but do not have planning consent). Unlike the committed development sites, the allocated sites do not have agreed trip generation, distribution, access strategies and transport mitigation, which can be included in the VISSIM model. Including traffic generated by Local Plan allocated sites within the Future Year Reference Case model without any mitigation is not considered appropriate.

3.3 **Trip Rates and Traffic Generation**

- **3.3.0** The traffic generation associated with each of the PR sites is summarised in section 4 of the Vectos MicroSim Forecasting report (**Appendix A**). The trip generation has been derived for each of the PR sites based on their location, opportunity for trips to be undertaken via active modes and public transport, and likely internalisation of trips. The proposed trip rates for PR8 have been agreed with OCC in advance and applied to the other PR sites, taking account of site-specific factors. The trip generation associated with the proposed quantum of development for the PR sites has been modelled. PR6b is yet to fix the quantum of development to be applied for and therefore the trips associated with the allocated quantum of development for PR6b have been modelled.
- 3.3.1 Section 4 of the Vectos MicroSim Forecasting report (**Appendix A**) also identifies the proposed site access arrangements for each of the PR sites.
- 3.3.2 Section 5 of the Vectos MicroSim Forecasting report (**Appendix A**) presents a summary of the peak period input demands for both the committed development and the PR sites.

3.4 Traffic Growth

- 3.4.0 The Forecast Capping Discussion Note (**Appendix A**) sets out the methodology for assessing traffic growth and its application in the Future Year Forecast Model. In summary:
 - Analysis and interpolation of the trends observed within the historic traffic data for the study area (2000 2017) revealed that, should the trends be projected forward, traffic levels would fall within the AM and PM peak hours by 2031 (Local Plan year) relative to 2017 levels.
 - Comparison of the historic traffic trends (2000 and 2017) relative to housing delivery over that
 period revealed that the reduction in traffic volumes was accompanied by an increase in
 housing provision, which demonstrates that increased housing levels will not necessarily mean
 an increase in traffic volumes.
 - Therefore, in order to reflect these trends within the traffic modelling, the Future Year Reference Case has been derived whereby total growth within the model, following the assignment of the committed development demands, remains at 0%.
- 3.4.1 The application of capping in the manner set out within the Capping Forecast Note (**Appendix B**) allows for realistic forecasts to be derived for assignment within the model such that the network capacity is not exceeded prior to any PR sites coming forward, as clearly that would not be a realistic position given the findings of the trend analysis which points to a steady decline in daily traffic volumes.
- 3.4.2 The resultant traffic figures assigned within the VISSIM model also align to some extent with OCC's adopted Local Transport and Connectivity Plan (LTCP). Continued application of increases in traffic volumes through the model forecasting would represent a significant failure in OCC's adopted policy approach.

3.5 **Interventions in the Future Year Modelling scenarios**

- 3.5.0 The following committed and planned infrastructure schemes and those planned to address growth elsewhere, have been included within the Future Year Reference Case:
 - Infrastructure associated with Oxford North committed development;
 - A40 HIF2 scheme improvement works;
 - North Oxford Corridor schemes including sustainable travel improvements to:
 - Peartree Interchange, Loop Farm roundabout and Cassington roundabout;
 - A44 between Pear Tree Interchange and Cassington roundabout; and
 - Kidlington roundabout.

3.6 **Testing of the Infrastructure Delivery Plan Interventions**

- 3.6.0 In 2015, the County Council and its partners began Connecting Oxfordshire, a transformation of how people travel to and within Oxford, as part of their plan to create a less congested, less polluted city and county.
- 3.6.1 In allocating the PR sites, CDC and OCC had due regard to this strategy and the approach to delivering growth, which is predicated on the assumption that wholesale increases in road capacity is no longer a sustainable or acceptable option. It was established that the A44 and A4260 corridors were well placed to deliver growth in a sustainable manner due to:
 - Their proximity and connections with Oxford;
 - Them being served by high frequency bus services;
 - There being an existing cycle network that encourages a relatively high proportion of cycle trips to be completed; and
 - Access to local pedestrian infrastructure.
- 3.6.2 In addition to this it was recognised that there are opportunities to build upon and enhance the current sustainable transport networks to ensure their use is prioritised and maximised. These measures were developed by OCC having regard to its Strategic Transport Assessment (STA) and have been included in the Infrastructure Delivery Plan (IDP) in Appendix 4 of the Part 1 Partial Review Local Plan. They include:
 - A Park and Ride at London-Oxford airport and expansion of Water Eaton Park and Ride (although it is understood that the latter is no longer proposed);
 - Public transport priority improvements along the A44 corridor;
 - Enhanced public transport services along the A44 corridor;
 - Pedestrian and cycle improvements along the A44 with signalised crossings;
 - Closure of Sandy Lane to through traffic and enhancements to assist its use by pedestrian and cyclists connecting between the A44 corridor and Kidlington; and
 - Cycle superhighway along the A4260 and Oxford Road towards Oxford city centre.
- 3.6.3 The works set out in the IDP of the Local Plan provide a sustainable transport network to support the proposed allocations through limiting the need to travel by car and offering a genuine choice of transport modes.

- 3.6.4 The range of mitigation measures included within the IDP have be tested within the model. The Vectos MicroSim Mode Shift Assessment Discussion Note (**Appendix C**) sets out the assumptions that have been applied to the demands within the VISSIM model to replicate the expected effects of changes in travel behaviour arising from the delivery of enhancements to the sustainable and active travel networks. The note considers demand adjustments for:
 - Delivery of Park and Ride;
 - Active Modes;
 - Cycle corridor improvements; and
 - Bus corridor improvements.
- 3.6.5 To assist with understanding which measures may be a priority, the note identifies the level of adjustment made at each stage of assessment. This will help to establish the extents of the IDP schemes that are specifically required to offset the increases in vehicle trips associated with the PR sites.
- **3.6.6 Table 3.1** summarises the infrastructure identified in Appendix 4 of the IDP which has been included within the modelled mode shift mitigation strategy. Schemes that have been omitted from the list are either due them not being necessary to mitigate the impacts of the PR sites, or are no longer being pursued by OCC, such as the expansion of the Water Eaton Park and Ride.

Ref	Scheme	Comment*
1	Potential for new rail halt at Begbroke	Land reserved in masterplan for PR8
3	Park and Ride at Oxford airport	Mode shift accounted for in model
4a	Improved bus lanes on A4165 between Kidlington roundabout and past new housing sites	Included in Oxford Road improvement promoted by PR6a and 6b
6с	A44 southbound bus lane between Spring Hill Road junction and Pear Tree Interchange.	Southbound bus lane between Cassington roundabout and Pear Tree Interchange included in the model as part of the growth fund scheme. Options for A44 corridor north of Cassington roundabout currently being designed by OUD in consultation with other PR sites and OCC.
7	4 buses per hour between Oxford and Begbroke	Limited mode shift accounted for in model

Table 3.1: Summary of Appendix 4 of IDP mitigation included in the modelling

Ref	Scheme	Comment*
8d	Upgrade of outbound bus stop on A4165 opposite Parkway	As part of mitigation package
9	Cycle superhighway along the A4260/A4165 to/from Oxford Parkway	Design work progressing as part of PR6a application.
10	Pedestrian and cycle improvements linking Kidlington, Begbroke and Yarnton: Potential closure of Sandy Lane to form green cycle/pedestrian route linking A44 and the A4260.	Active travel improvements linking A44 to Kidlington provided for in PR8 site master planning and bridge being progressed by Network Rail as part of Oxford Phase 2
12	Walking/cycling/wheelchair accessibility from land at Stratfield Farm (PR7b) to key facilities on the A4165, including proposed sporting facilities at PR7a	
13	New public bridleways suitable for pedestrians, all weather cycling, wheelchair use and horse riding and connecting with existing public rights of way network	Included in site master planning
14	Walking/cycling/ wheelchair accessibility from PR7b to PR8, including suitable crossing over the Oxford Canal	Included in site master planning of PR7b and PR8
15	New public bridleway / green link connecting PR7b with PR8 across Oxford canal and exploration of links with the wider PRoW east of A4165	
16	Wheelchair accessible pedestrian / cycle bridge over Oxford canal linking PR7b to PR8	Included in site master planning of PR7b and PR8
17	Sandy Lane – pedestrian and cycle new link over railway	Included in PR8 site master planning. To be applied for by Network Rail as part of closure of level crossing
17a	Sandy Lane ped/cycle railway bridge	Included in site master planning – PR8. To be applied for by Network Rail as part of closure of level crossing
18	Kidlington roundabout provision of ped/cycle crossing at roundabout	Growth fund scheme included
19	Connectivity from PR9 to local facilities within Yarnton	Included in PR9 site master planning
20	New walk and cycle routes from PR9 through Yarnton	Included in PR9 site master planning
21	Cycle and pedestrian improvements on A44, including ped/cycle crossing facilities	Included but extent and design of works to be agreed.
23	Reduction of speed limit and pedestrian/cycle crossing at key locations along A44 from Sandy Lane to Cassington Rd	Included
24	Footpaths / cycleways within all proposed development sites that link new development to existing and proposed networks	Included in site master planning for all PR sites
25	Pedestrian/cycle / wheelchair accessibility from PR6a to Water Eaton Park / Oxford Parkway	Included in PR6a site master planning
26	Ped/cycle/wheelchair accessibility from PR6b to employment opportunities at Oxford Northern Gateway	Routes through PR6b to be included in site master planning

Ref	Scheme	Comment*
27	Upgrade existing footbridge over railway linking PR6b to Northern Gateway	Subject to land ownership and liaison with stakeholders, including Network Rail
28	Ped/cycle/wheelchair accessibility across A4165 from PR6b to PR6a	Included in proposed design of upgrades to A4165 Oxford Road set out in PR6a application
29	Footway along southbound carriageway of Bicester Road	Included in PR7a site master planning
30	Ped/cycle/wheelchair accessibility to Oxford Parkway across to Bicester Road and to formal sports pitches on site	Included in PR7a site master planning
31	Vehicular spine route through PR8 capable of being used by buses	Included in PR8 site master planning
32	Highway works to Kidlington roundabout to enable site access for PR7b	Included in PR7b site master planning
33	Ped/cycle bridges over railway and Oxford Canal	Provided for in site master planning PR8/PR7b but subject to liaison with stakeholders

*It should be noted that notwithstanding the inclusion within the modelling of the interventions listed in Table 3.1, the direct delivery of individual infrastructure measures will be confirmed as part of the relevant PR site application(s). Equally, the funding of the proposed interventions that are not being delivered by each of the respective PR sites via inclusion within individual masterplans and/or Section 278 Agreements is to be agreed using a charging mechanism that accords with the usual requirements of Regulation 122 of the CIL Regulations. The PR sites look forward to working in a collaborative partnership with CDC and OCC to achieve this.

3.7 **Decide and Provide**

- 3.7.0 Oxfordshire County Council's (OCC) Local Transport and Connectivity Plan (LTCP), adopted in July 2022, outlines a clear vision to deliver a net-zero Oxfordshire transport and travel system by 2040 as well as reducing private vehicle use, and prioritising walking, cycling, and public transport.
- 3.7.1 In order to achieve this, the LTCP sets out the way changes to the County's transport and travel system will be needed. This multi-pronged approach sets out the reshaping of the way places are connected, and infrastructure is upgraded and reconfigured in order to achieve these aspirations. The approach includes the forthcoming area transport strategies and transport corridor strategies, OCC's new Parking Standards for New Developments (2022), the OCC Street Design Guide (2021), and a shift from an approach to transport planning characterised as 'predict and provide' towards adopting a 'decide and provide' approach instead.

- 3.7.2 The recently approved OCC guidance 'Implementing Decide and Provide: Requirements for Transport Assessments' (September 2022) sets out how the transport assessment process needs to be adapted to help facilitate the 'decide and provide' approach, but also recognises that this is only one part of working towards and adopting this new approach to transport planning.
- 3.7.3 The OCC guidance is broken down into three subsections:
 - Part One Guiding Principles;
 - Part Two Transport Modelling, Evidencing Trip Rates, and Document Updates; and
 - Part Three Implementing 'Decide and Provide' within Transport Assessments.

Part One - Guiding Principles

3.7.4 The guidance sets out that:

... the 'decide and provide' approach to transport planning decides on a preferred vision of the future and then provides the means to work towards that whilst also accommodating uncertainty about the future. This offers the opportunity for more positive transport planning and will help to implement the LTCP transport user hierarchy by considering walking, cycling and public transport upfront.

This approach is captured in LTCP Policy 36 (2022a, p.106), which states that: We will:

a. Only consider road capacity schemes after all other options have been explored.

b. Where appropriate, adopt a decide and provide approach to manage and develop the county's road network.

c. Assess opportunities for traffic reduction as part of any junction or road route improvement schemes.

d. Require transport assessments accompanying planning applications for new development to follow the County Council's 'Implementing 'Decide & Provide': Requirements for Transport Assessments' document.

e. Promote the use of the 'decide and provide' approach in planning policy development to support site assessment.

3.7.5 The guidance sets out that planning policy supports the 'decide and provide' approach, including National Planning Policy Framework (NPPF), local plans for the districts of Oxfordshire and the Oxfordshire LTCP.

3.7.6 The traffic modelling undertaken for the PR sites supports the approach of considering walking, cycling and public transport ahead of any capacity improvements and will be used to inform the Transport Assessments which support individual PR site applications.

Part Two - Transport Modelling, Evidencing Trip Rates, and Document Updates

- 3.7.7 This part of the 'decide and provide' guidance sets out the assumptions that should be made for:
 - permitted, committed and planned growth;
 - the suitability of various evidentiary sources;
 - the consideration of the long-term effects of Covid-related transport impacts;
 - the relationship between car parking provision and trip rates;
 - the applicability of the car trip reduction targets in the LTCP;
 - how this document should inform the evidence base for local plans; and
 - the requirement for periodic updates to the document.
- 3.7.8 With regards to permitted, committed and planned growth, the guidance states that "a scoping exercise will need to be undertaken to ensure that transport assessments (and transport statements) take appropriate account of permitted, committed, and planned growth which will generate traffic impacts on the area of the highway network also impacted by the proposed development."
- 3.7.9 The PR sites have engaged with OCC over a number of years to agree the scope of the modelling including the model software, study area and assumptions for permitted, committed and planned growth.
- 3.7.10 With regards to evidence sources, the Forecasting Note and Forecast Capping Note included in **Appendices A** and **B** set out the proposed approach to traffic growth for the Future Year Reference Case based on various sources of evidence, including historic traffic data, housing projections and NTEM. The active travel and public transport mode shift assumptions set out in the Mode Shift Note included in **Appendix C** align with the infrastructure set out in Appendix 4 of the CDC Local Plan Part 1 Partial Review and provide a scenario which shows how these PR site interventions are likely to help towards OCC reaching their LTCP targets. Likewise, the trip rates and modal share for the PR sites have been based on TRICS data, local Census data, the destination of trips and ability to access facilities by active travel and public transport, both now and in the future, as well as future travel habits.
- 3.7.11 With regards to Covid related transport effects, the historic traffic trends analysis that has informed the traffic growth did not include traffic data during the Covid pandemic and therefore any traffic effects of the pandemic have not been accounted for by the PR sites modelling.

- 3.7.12 With regards to the relationship between car parking and trip rates, providing car and cycle parking in line with the latest OCC 'Parking Standards for New Developments' (2022) will form part of the wider strategy of the PR sites to encourage modal shift by providing improvements to sustainable and active modes, demand management measures, and master planning.
- 3.7.13 The LTCP includes the following targets for replacing or removing car trips across the County:

By 2030:

- Replace or remove 1 out of every 4 current car trips in Oxfordshire.
- Increase the number of cycle trips from 600,000 to 1 million cycle trips per week: and
- Reduce road fatalities or life changing injuries by 50%.

By 2040:

- Deliver a net-zero transport network; and
- Replace or remove an additional 1 out of 3 car trips in Oxfordshire.

By 2050:

- Deliver a transport network that contributes to a climate positive future; and
- Have zero, or as close as possible, road fatalities or life-changing injuries.
- 3.7.14 The LTCP mode shift targets have not been included in the PR site modelling. If the LTCP targets are realised (i.e., 25% mode shift away from the car by 2030) through a wider set of interventions currently being planned by the County, then the network will operate significantly better than predicted through the current PR sites modelling.

Part Three - Implementing 'Decide and Provide' within Transport Assessments

3.7.15 Part three of the 'decide and provide' guidance identifies three stages - *identifying accessibility characteristics; scenario testing; and monitoring and managing outcomes.*

Identifying accessibility characteristics

3.7.16 The PR sites have all been allocated based on their existing and future characteristics and are therefore all well located to existing settlements and facilities. They will bring forward a range of facilities and measures, both internally and externally which will facilitate internalisation of trips, reducing the need to travel and ensure that as many residual trips as possible are catered for by active travel and public transport modes.

Scenario testing

- 3.7.17 The 'decide and provide' guidance requires scenario testing to be undertaken. Separate to this VISSIM modelling exercise, alternative scenarios, which include the PR sites, have been tested within the following workstreams:
 - The strategic modelling work which supported the Part 1 Partial Review Local Plan, and which identified the infrastructure package included within Appendix 4. This modelling was based on highly robust trip rates, which did not consider aspects such as mode shift or internalisation of trips. It also included traffic growth in background traffic and committed developments.
 - Additional strategic modelling which is currently being undertaken by OCC to test implications of the LTCP and implementation of the Central Oxfordshire Travel Plan; and
 - Additional scenario tests considered in individual Transport Assessments to support applications for some of the PR sites, whereby sites have been tested in isolation, and presented in terms of a 'predict and provide' approach to traffic growth, trip generation rates and distribution.
- 3.7.18 As part of this VISSIM modelling exercise, a number of scenarios have been tested. Scenario tests have been undertaken on the level of mode share that may be achieved for the background traffic as a result of the proposed infrastructure being brought forward to the north of Oxford. The low, medium and high mode shift scenario tests are set out in the Mode Shift Discussion Note (**Appendix C**).

Monitoring and managing outcomes

- 3.7.19 The OCC 'decide and provide' guidance requires a Monitoring and Evaluation Plan (MEP) to be secured and implemented through the Travel Plan as part of the S106 agreement.
- 3.7.20 In accordance with the guidance, the MEP will record how the trip generation and mode share of the site evolves over time. The survey specification will need to be agreed with OCC and should employ the TRICS Standard Assessment Methodology or similar.
- 3.7.21 The PR sites are committed to monitoring trips into and out of the individual PR sites over a number of years through an MEP, secured through the Travel Plans.

3.8 **Modelling Scenarios**

- 3.8.0 On the basis of the above, the following modelling scenarios have been considered and are reported upon:
 - 2018 Baseline (Morning and evening peak period)
 - Future Year Reference Case + Growth Fund schemes (Morning and evening peak period)

- Future Year Do Something (DS) (Low Modal Shift) (Morning and evening peak period)
- Future Year Do Something (DS) (Medium Modal Shift) (Morning and evening peak period)
- Future Year Do Something (DS) (High Modal Shift) (Morning and evening peak period)

SECTION 4 Modelling Outcomes

4.0 Introduction

- 4.0.0 The modelling scenarios set out in Section 3 provide the information required to understand the cumulative impact of the PR sites and will be used to inform the Transport Assessment(s) for the PR sites and agree the scope of required mitigation.
- 4.0.1 This section of the note provides a summary of the following modelling outcomes:
 - Network statistics across the network;
 - Queue lengths and delay, including Level of Service assessment for the following junctions:
 - A44/ Cassington Road Roundabout;
 - Pear Tree Interchange;
 - Loop Farm Roundabout;
 - Wolvercote Roundabout;
 - Cutteslowe Roundabout; and
 - Kidlington Roundabout.
 - Journey time information for the following routes:
 - Route 1: A34 within the model extents either side of the Pear Tree Interchange;
 - Route 2: A40 between Wolvercote Roundabout and River Cherwell;
 - Route 3: A44 / A4144 corridor between Oxford Airport and Staverton Road;
 - Route 4: A4260 / A4165 corridor between the A4095 and Linton Road;
 - Route 5: Upper Campsfield Road;
 - Route 6: Langford Lane between A44 Woodstock Road and A4260 Banbury Road;
 - Route 7: Frieze Way; and
 - Route 8: Bicester Road.

4.1 **Network Statistics**

Vehicle Trips

4.1.0 **Table 4.1** below identifies the active number of vehicles in the modelled network, the total number of vehicle trips completed and the latent demand (number of vehicles not able to enter the network) for all scenarios in the AM and PM 3 hour peak periods.

		2018 Base	Future Year Reference	DS Mode Shift (Low)	DS Mode Shift (Medium)	DS Mode Shift (High)
Vehicles Active	AM Peak Period	2,126	2,177	2739	2521	2260
in the Network	PM Peak Period	2,803	2,439	3227	3145	3025
Vehicle Trips	AM Peak Period	48,889	48,891 50,989		50,182	50,152
Completed	PM Peak Period	50,229	50,400	52,840	52,321	52,091
Latent Demand	AM Peak Period	1	25	47	90	40
at End of Simulation	PM Peak Period	2	125	199	38	23
Total Input	AM Peak Period	51,016	51,093	53,775	52,793	52,452
Vehicle Numbers	PM Peak Period	53,034	52,964	56,226	55,504	55,139

Table 4.1 Vehicles in Network (AM and PM 3 hour peak periods)

4.1.1 **Table 4.1** shows that despite there being more vehicles in the network in the Do Something (DS) scenarios compared to the Future Year Reference scenario, the latent demand remains consistently very low and in the PM peak period it reduces in the DS high and medium mode share scenarios compared to the Future Year Reference scenario. This demonstrates that the vehicle demand in the DS scenarios can travel through the network during the peak periods.

Vehicle Delay

4.1.2 **Table 4.2** below identifies the delay for vehicles travelling through the network for all scenarios in the AM and PM 3 hour peak periods.

		2018 Base	Future Year Reference	DS Mode Shift (Low)	DS Mode Shift (Medium)	DS Mode Shift (High)
Average Delay per	AM Peak Period	169	187	+63	+39	+7
Vehicle in the Network	PM Peak Period	202	144	+55	+49	+43
Overall Delay per Vehicle (including	AM Peak Period	171	189	+64	+41	+8
time off network)	PM Peak Period	203	153	+58	+43	+37

Table 4.2 Vehicle Delay (Seconds)

- 4.1.3 **Table 4.2** shows that the DS Mode Shift scenarios average vehicle delay in the AM 3 hour peak period increases by 7 to 63 seconds per vehicle compared to the Future Year Reference Case, depending on the level of mode shift within the DS scenarios. The overall delay per vehicle (delay of vehicles in the network + latent demand) in the AM peak period is very similar to the average delay as a result of the very low level of latent demand.
- 4.1.4 In the PM 3 hour peak period the average vehicle delay increases by 43 to 55 seconds per vehicle in the DS scenarios compared to the Future Year Reference Case. The overall delay per vehicle (delay of vehicles in the network + latent demand) in the PM peak period is very similar to the average delay as a result of the very low level of latent demand.
- 4.1.5 Overall, the results demonstrate that following the introduction of the package of measures included within the IDP the impact of the PR sites will not result in a severe impact on vehicle delay.

Average Vehicle Speeds

4.1.6 **Table 4.3** below summarises the average vehicle speeds (in mph) for all scenarios in the AM and PM 3 hour peak periods.

		2018 Base	Future Year Reference	DS Mode Shift (Low)	DS Mode Shift (Medium)	DS Mode Shift (High)
Average Vehicle	AM Peak Period	27	26	23	25	26
Speeds (mph)	PM Peak Period	25	29	26	26	26


Table 4.3: Average Vehicle Speeds (MPH)

4.1.7 **Table 4.3** shows that in the Do Something scenarios (i.e. with mode shift), there is negligible impact on average vehicle speeds across the network compared to the Future Year Reference Case.

4.2 **Journey Times**

4.2.0 Journey times along key corridors within the modelled network have been assessed. **Figure 4.1** below summarises the eight journey time routes that have been analysed within the model. Each journey time route has been analysed in each direction for each of the modelled hours within the AM and PM peak periods.



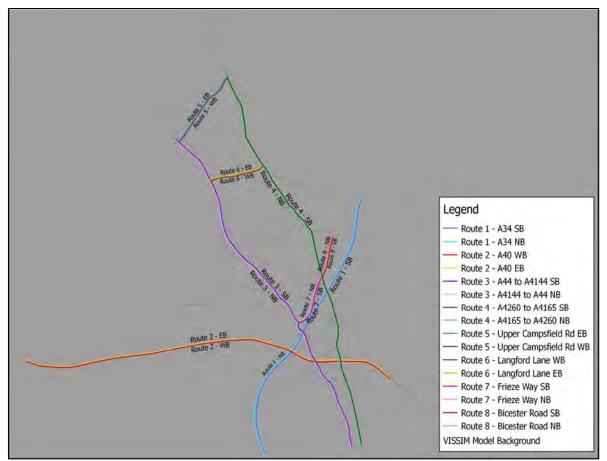

4.2.1 **Table 4.4** below summarises the forecast Future Year Reference Case journey times for the eight routes in the AM peak period as well as the forecast change in journey times along the routes for the Future Year Do Something (DS) scenarios (i.e., Future Year Reference Case + PR sites and mode shift).

				07:00-	08:00			08:00-0	9:00			09:00	-10:00	
	Route		Future	DS	Mode S	hift	Future	DS I	Mode Sl	nift	Future	DS	Mode S	hift
			Year Ref	Low	Med	High	Year Ref	Low	Med	High	Year Ref	Low	Med	High
1	4.2.4	NB	323	+1	+1	+1	319	+3	+1	+2	323	+4	+3	+1
1	A34	SB	323	0	+1	+1	318	+3	+4	+4	322	+3	+2	+3
2		EB	1954	+29	+41	+7	1,034	+30	+26	-11	1,000	+421	+167	-3
2	A40	WB	768	+36	+41	+48	1,121	-113	-227	-271	783	+68	+1	-5
	A44 Staverton	NB	632	+65	+47	+44	679	+212	+210	+94	657	+390	+198	+78
3a	Rd – PR8/PR9 Access	SB	725	+106	+81	+44	1,096	+423	+301	+159	927	+388	+422	+41
	A44 PR8/PR9	NB	160	+30	+28	+29	172	+29	+32	+30	164	+59	+49	+28
3b	Access – Oxford Airport	SB	228	+58	+42	+36	269	+30	+13	+17	210	+52	+52	+45
	4,42,62	NB	1,177	+30	+48	+24	1,311	+99	+37	+47	1,274	+416	+67	+32
4	A4260	SB	1,418	-36	-17	-49	2,000	-270	-286	-336	1,393	+133	+22	-5
_	4 4005	EB	155	-8	+7	-10	204	-38	+42	-45	157	-10	-5	-4
5	A4095	WB	129	+2	+4	+2	132	+1	-1	-2	126	0	0	+1
6	Langford	EB	162	0	-5	-2	175	-6	-8	-11	167	+4	-7	-10
6	Lane	WB	151	0	-1	0	154	+1	-1	-1	150	+3	+1	0
7	Frieze	NB	62	0	+1	0	63	0	+1	+1	63	0	+1	+1
/	Way	SB	115	-2	-4	-1	127	+6	-12	-4	433	+270	+293	-106
_	Bicester	NB	39	+30	+28	+30	39	+29	+28	+29	40	+30	+30	+30
8	Road	SB	58	+25	+23	+22	52	+27	+28	+25	56	+58	+23	+19

Table 4.4: Change in journey times (seconds) along routes in the AM peak period

- 4.2.2 The following conclusions are drawn from the journey time analysis in **Table 4.4**:
 - Between 07:00-08:00 the journey times are forecast to increase by less than 60 seconds with all levels of mode shift in the DS scenario for all routes compared to the Future Year Reference Case, with the exception of A44 northbound between Staverton Road and PR8/PR9 access (ranging between +44 and +65 seconds) and A44 southbound between Staverton Road ad PR8/PR9 access (ranging between +44 and +106 seconds) depending on the level of mode shift.
 - Between 08:00-09:00 the journey times are forecast to increase by no more than 60 seconds with all levels of mode shift in the DS scenario for all routes compared to the Future Year Reference Case, with the exception of A44 north and southbound, and the A4260 northbound.
 - The A44 northbound between Staverton Road and PR8/PR9 Access sees increases in journey time of +94 to +212 seconds and the A44 southbound sees increases of +159 to +423 seconds.
 - The A4260 northbound sees increases in journey time of +37 to +99 seconds.
 - There are also forecast to be some journey time savings on routes, most notably on the A4260 southbound (-270 to -336 seconds) and the A40 westbound (-113 to -271 seconds) depending on level of mode shift.
 - Between 09:00-10:00 the journey times are forecast to increase by no more than 60 seconds with all levels of mode shift in the DS scenario for all routes compared to the Future Year Reference Case, with the exception of the A44 northbound and southbound, A40 eastbound and westbound, the A4260 northbound and southbound and Frieze Way southbound.
 - The A44 northbound between Staverton Road and PR8/PR9 Access sees increases in journey time of +78 to +390 seconds and the A44 southbound sees increases of +41 to +422 seconds.
 - The A4260 northbound sees increases in journey time of +32 to +416 seconds and the A4260 southbound sees changes in journey time of -5 to +133 seconds.
 - The A40 eastbound sees changes in journey time of -3 to +421 seconds and the A40 westbound sees changes in journey time of -5 to +68 seconds.
 - Frieze Way southbound sees changes in journey time of -106 to +293 seconds.

- 4.2.3 It is clear from the results that a small increase in mode shift between medium and high mode shift scenarios (e.g. 0.62% to 0.75% depending on the hour, as set out in the Mode Shift Discussion Note **Appendix C**) would have a material effect on journey time.
- 4.2.4 **Table 4.5** summarises the journey times for the eight routes in the PM peak period.

				15:00 -	- 16:00			16:00 -	17:00			17:00 -	18:00	
	Route		Future	DS	Mode S	Shift	Future	DS	Mode S	hift	Future	DS	Mode S	hift
			Year Ref	Low	Med	High	Year Ref	Low	Med	High	Year Ref	Low	Med	High
1	A34	NB	317	+2	+3	+2	316	+2	+3	+2	314	+3	+3	+4
I	A34	SB	312	+4	+3	+2	314	+2	0	0	313	+2	+3	+2
2	A40	EB	1003	+12	+32	+26	1033	+15	+19	+9	967	+17	+18	+18
2	A40	WB	740	+15	+16	+18	742	+8	+17	+18	756	+16	+19	+20
	Staverton Rd –	NB	650	+11	+5	+1	691	+30	+21	+5	725	+38	+10	-9
3a	PR8/PR9 Access	SB	692	+63	+46	+55	939	+330	+288	+266	689	+789	+800	+731
	A44 PR8/PR9	NB	164	+24	+24	+24	171	+29	+27	+25	192	+34	+26	+25
3 b	Access – Oxford Airport	SB	189	+30	+28	+27	201	+61	+47	+58	208	+78	+54	+34
4	A4260	NB	1217	+20	+18	+4	1211	+37	+31	+24	1240	+61	+57	+38
4	A4200	SB	1228	+47	+44	+41	1319	+116	+111	+80	1243	+149	+134	+143
5	A4095	EB	134	+2	+2	0	141	-1	0	-3	147	-3	-1	-2
5	A4095	WB	131	+2	0	0	132	+8	+8	+7	133	+15	+20	+14
6	Langford	EB	153	+1	0	-1	160	+10	+8	+3	162	+46	+43	+43
0	Lane	WB	147	+2	+2	+4	154	0	0	+1	155	+2	0	+3
7		NB	63	0	-1	0	65	0	-1	0	65	0	0	-1
7	Frieze Way	SB	91	+4	+3	+4	97	+1	+1	+2	97	+1	+2	+3
0	Bicester	NB	38	+29	+31	+29	37	+29	+28	+29	38	+31	+29	+30
8	Road	SB	43	+23	+23	+24	44	+25	+25	+24	44	+30	+28	+28

- 4.2.5 The following conclusions are drawn from the journey time analysis in **Table 4.5**:
 - Between 15:00-16:00 the journey times are forecast to increase by less than 60 seconds with all DS mode shift scenarios for all routes compared to the Future Year Reference Case, with the exception of A44 southbound between Staverton Road and PR8/PR9 Access (+46 to +63 seconds), depending on the mode shift.
 - Between 16:00-17:00 the journey times are forecast to increase by no more than 60 seconds with all DS mode shift scenarios for all routes compared to the Future Year Reference Case, with the exception of A44 southbound and A4260 southbound.
 - A44 southbound between Staverton Road and PR8/PR9 access forecasts increases in journey time of +266 to +330 seconds.
 - A4260 southbound forecasts increases in journey time of +80 to +116 seconds.
 - Between 17:00-18:00 the journey times are forecast to increase by no more than 60 seconds with all DS mode shift scenarios for all routes compared to the Future Year Reference Case, with the exception of A44 southbound and A4260 northbound and southbound.
 - The A44 southbound between Staverton Road and PR8/PR9 Access forecasts increases in journey time of +731 to +800 seconds and the A44 southbound between Oxford Airport and PR8/PR9 Access sees increases of +34 to +78 seconds.
 - A4260 southbound sees increases in journey time of +134 to +149 seconds and the
 A4260 northbound sees increases of +38 to +61 seconds.
- 4.2.6 It can be seen from the journey time results that the model forecasts some increases in journey times, focussed primarily along the A44 and A4260 corridors. The level of increase in journey time ranges depending on the level of mode shift of background traffic as a result of the implementation of the IDP schemes. There are also some forecast journey time savings.
- 4.2.7 With regards to the A44 corridor, a southbound bus lane is currently being constructed by OCC between Loop Farm roundabout and Cassington roundabout and therefore bus journey times will not be impacted on this section of the corridor. As part of the package of improvements in the IDP it is proposed to provide further bus priority and active travel improvements along the A44 between Cassington roundabout and Spring Hill Road, which would further mitigate bus journey time impacts. The modelling presented in this technical note does not include a southbound bus lane on the A44 between Cassington roundabout and Spring Hill Road. Whilst the PR sites are supportive of reallocating road space for sustainable modes, it would require further mode shift to buses than this assessment has provided for in order to understand the effects of such provision.

4.2.8 As stated earlier, the modelling of the PR sites does not take account of the LTCP schemes being implemented by OCC and the resultant targeted mode shift of 25% reduction of car trips by 2030. As such, with the implementation of LTCP transport schemes beyond the infrastructure being brought forward by the PR sites, there would be expected to be a further reduction in journey times along the key routes within the modelled area.

4.3 **Queues**

- 4.3.0 For the purposes of this section, queues have been reported for the scenarios outlined below to show the forecast change in average queue lengths at each junction:
 - Future Year Reference Case + Growth Fund schemes (Morning and evening peak period)
 - Future Year Do Something (DS) (Morning and evening peak period)
- 4.3.1 This has been undertaken at the six key junctions as shown in **Figure 4.2** and comprise:
 - A Woodstock Road/Cassington Road;
 - B Oxford Road/Bicester Road roundabout;
 - C Loop Farm Roundabout;
 - D Peartree Roundabout;
 - E Wolvercote Roundabout; and
 - F Cutteslowe Roundabout.

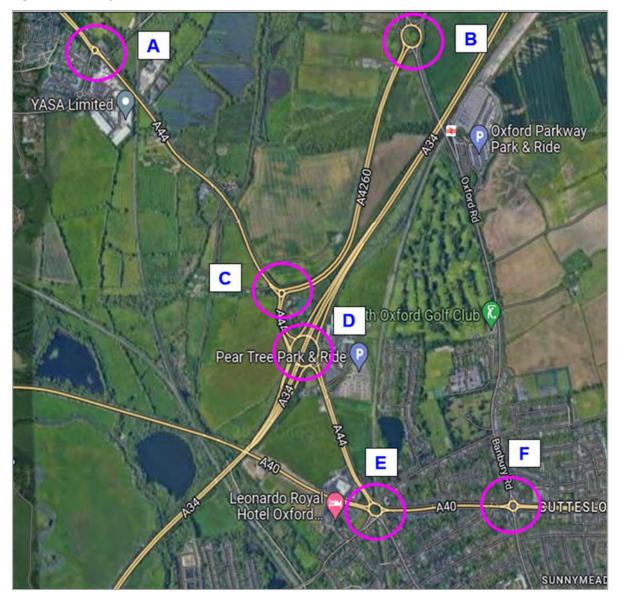


Figure 4.2: Study Area

Queue Difference Analysis

4.3.2 The average queue results in metres for each junction between the times of 07:00-10:00 and 15:00-18:00 is summarised in this section. A red/amber/green comparison of queue lengths is provided to understand the cumulative effect of the PR sites within each scenario based on the criteria set out in **Table 4.6**. It should be noted that the red/amber/green criteria are arbitrary ranges and are not linked to planning policy tests or any guidance on traffic modelling. It simply provides a pictural illustration of the range of increases in queuing at the junctions.

Table 4.6: Queue Length Criteria

	Colour Coding
Queue increases less than or equal to 50m	
Queue increase more than 50m, up to 100m	
Queue increase more than 100m, up to 150m	
Queue increases by greater than 150m	

#

Peak Hour Average Queue Differences

4.3.3 For the purposes of this section the queue differences between the DS scenarios and Future Reference Case the for the AM and PM peak periods have been summarised for each junction within the study area.

A44/Cassington Road

4.3.4 **Tables 4.7** and **4.8** below summarise the forecast change in average queue lengths at the A44/Cassington Road roundabout in the AM and PM peak periods respectively.

		07:00-0	08:00			08:00-0	9:00		09:00-10:00			
Arm	Future DS Mode Shift				Future	DS N	Future DS Mode Sh			hift		
	Year Ref	Low	Med	High	Year Ref	Low	Med	High	Year Ref	Low	Med	High
A44 SE Approach	1	0	0	0	1	0	0	0	0	0	0	0
Cassington Rd Approach	1	+3	+2	+4	2	+4	+5	+8	1	+2	+2	+3
A44 NW Approach	16	+147	+125	+76	13	+270	+265	+201	21	+162	+224	+98

Table 4.7: A44/Cassington Road Change in Average Queue Length (m) AM Peak

4.3.5 **Table 4.7** shows that overall, there will be negligible changes in queuing on this junction in the AM peak period except for the A44 north-west approach to the roundabout which the model forecasts an average increase in queues ranging from +76m (13 vehicles) to +270m (47 vehicles) in the AM peak period depending on the hour and level of mode shift. The results show that a small change in mode shift (e.g. 0.62-0.75% in the AM peak period between the medium and high mode shift scenarios) would result in reductions in queue length on the A44 north-west approach to the junction.

		15:00-	16:00			16:00-1	7:00		17:00-18:00				
Arm	Future DS Mode Shift				Future	DS N	/lode S	hift	Future	DS Mode Shift			
	Year Ref	Low	Med	High	Year Ref	Low	Med	High	Year Ref	Low	Med	High	
A44 SE Approach	0	0	0	0	0	0	0	0	0	0	0	0	
Cassington Rd Approach	0	0	0	0	0	0	0	0	2	+2	+1	+1	
A44 NW Approach	2	+51	+37	+32	3	+211	+194	+173	9	+277	+277	+277	

Table 4.8: A44/Cassington	Road Change in A	verage Queue Ler	ngth (m) PM Peak

- **4.3.6 Table 4.8** shows that overall, there will be negligible changes in queuing on this junction in the PM peak period except for the A44 north-west approach to the roundabout which the model forecasts an average increase in queues ranging from +32m (6 vehicles) to +277m (48 vehicles) in the AM peak period depending on the hour and level of mode shift.
- 4.3.7 The analysis shows that the queue does not block back to any junctions in the AM and PM peak periods and is relatively short lived and is therefore not considered to have a severe impact on the network. This is demonstrated by the queue lengths for the AM (0800-0900) and PM (1700-1800) peak hours shown on **Figure 4.2**, which compares the DS medium mode shift queue lengths with the Future Year Reference Case queue lengths.#

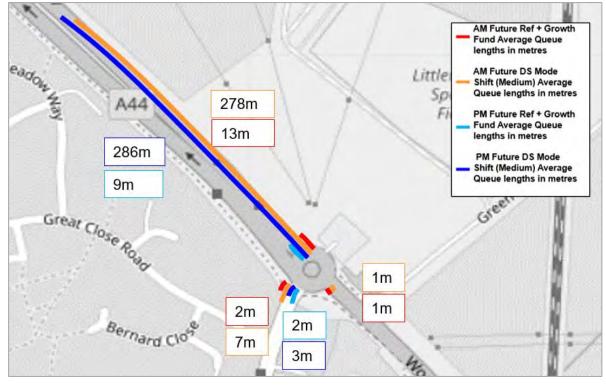


Figure 4.2: A44/Cassington Road queue lengths in the AM and PM peak hours +3 ; 3303 < 33 # dqg# : 3304 ; 33,

Oxford Road/Bicester Road roundabout

4.3.8 **Tables 4.9** and **4.10** below summarise the forecast change in average queue lengths at the Oxford Road/Bicester Road roundabout in the AM and PM peak periods respectively.

		07:00-08	0	8:00-0	9:00		09:00-10:00					
Arm	Future	DS N	DS Mode Shift		Future	DS Mode Shift			Future	DS Mode Shift		
	Year Ref	Low	Med	High	Year Ref	Low	Med	High	Year Ref	Low	Med	High
A4260 Oxford Rd Northern Arm	8	-4	-2	-3	2	+3	+5	+6	12	-1	+3	-7
Bicester Rd Approach Eastern Arm	4	+2	+2	+1	3	+3	+3	+3	3	+19	+1	-1
Oxford Rd Southern Arm	4	+1	+1	+1	5	+1	+1	+1	5	0	0	0
Frieze Way	1	0	0	0	1	0	+1	+1	1	0	0	0
Oxford Rd, Kidlington access road	2	0	+1	0	1	1	+1	+1	1	0	0	0

Table 4.9: Oxford Road/Bicester Road Change in Average Queue Length (m) AM Peak

4.3.9 **Table 4.9** demonstrates that there would be a negligible increase in queue length in the AM peak period at the junction of Oxford Road/Bicester Road.

		15:00-1		16:00- 1	7:00		17:00-18:00					
Arm	Future	DS M	lode Sł	ode Shift		DS Mode Shift			Future	DS Mode Shift		
	Year Ref	Low	Med	High	Year Ref	Low	Med	High	Year Ref	Low	Med	High
A4260 Oxford Rd Northern Arm	6	+7	+4	+9	12	+32	+26	+18	15	+47	+36	+58
Bicester Rd Approach Eastern Arm	0	0	0	0	1	0	0	0	1	0	0	0
Oxford Rd Southern Arm	7	0	0	0	8	0	0	0	8	0	0	0
Frieze Way	1	0	0	0	2	0	0	0	2	0	0	0
Oxford Rd, Kidlington access road	1	0	0	0	1	0	0	0	1	0	0	0

4.3.10 **Table 4.10** shows that in the PM peak period there are no changes in queue lengths on all arms except the A4260 Oxford Road northern arm, consisting of an increase in queue ranging between +4m (1 vehicle) to +58m (10 vehicles). It should be noted that these queues do not block back to any key junction. This is demonstrated by the queue lengths for the AM (0800-0900) and PM (1700-1800) peak hours shown on **Figure 4.3**, which compares the DS medium mode shift queue lengths with the Future Year Reference Case queue lengths.#

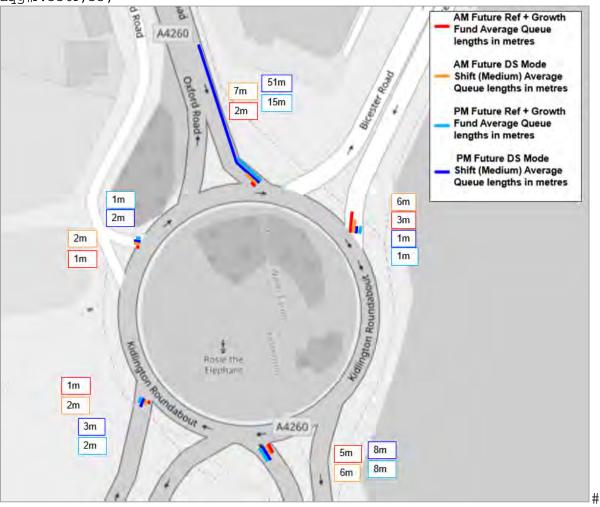


Figure 4.3: Oxford Road/Bicester Road Roundabout Average Queue lengths +3;3303<33# dqg掛:3304;33,

Loop Farm Roundabout

4.3.11 Tables 4.11 and **4.12** below summarise the forecast change in average queue lengths at Loop Farm roundabout in the AM and PM peak periods respectively.

	07	0	8:00-0	9:00		09:00-10:00						
Arm	Future	DS I	DS Mode Shift		Future	DS Mode Shift			Future	DS Mode Shift		
	Year Ref	Low	Med	High	Year Ref	Low	Med	High	Year Ref	Low	Med	High
A44 north-west approach	5	-2	+5	0	36	+38	-2	-3	196	+241		-78
A4260 Frieze Way	8	+1	0	+1	16	+14	-3	+2	93	+52	+52	-26
A44 southern approach	3	+3	+4	+2	2	+7	+15	+4	1	+1	+1	+1

Table 4.11: Loop Farm	Roundabout (Change in		ue Lonath (n) AM Doak
Table 4.11. LOOP Failin	Roundabout	change m	Average Que	ue Lengin (n	I) AIVI FEAK

4.3.12 **Table 4.11** shows that overall, there will be negligible changes in queuing on this junction in the AM peak period except for the A44 north-west approach to the roundabout which the model forecasts an average increase in queues ranging from -3m to +241m (42 vehicles) in the AM peak period depending on the hour and level of mode shift. The results show that a small change in mode shift (e.g. 0.6-0.75% in the AM peak period between the medium and high mode shift scenarios) would result in betterment in queuing on the A44 north-west approach compared to the Future Case Reference Case.

	19	16:00-17:00				17:00-18:00						
Arm	Future	DS Mode Shift			Future	DS Mode Shift			Future	DS Mode Shift		
	Year Ref	Low	Med	High	Year Ref	Low	Med	High	Year Ref	Low	Med	High
A44 north-west approach	2	+4	+4	+4	9	+546	+560	+437	7	+263	+455	+350
A4260 Frieze Way	1	+2	+2	+2	1	+1	+2	+1	2	+2	+2	+3
A44 southern approach	2	+2	+2	+1	5	+10	+9	+8	7	+10	+9	+5

Table 4.12: Loop Farm Roundabout Change in Average Queue Length (m) PM Peak

4.3.13 **Table 4.12** shows that the addition of the development would result in negligible changes in queues across the junction in the PM peak period with the exception of the A44 north-west approach, which the model forecasts to experience an increase in queue length ranging from +4m (1 vehicle) to +560m (99 vehicles) depending on the hour and level of mode shift. As shown in **Figure 4.4**, the increase in queuing on the A44 north-west approach does not result in blocking back to the Cassington Road roundabout. Likewise, buses would not be impacted as OCC has recently implemented a southbound bus lane on this section of the A44. As such the impact of the development at this junction is not anticipated to have a severe residual cumulative impact or introduce a road safety issue.

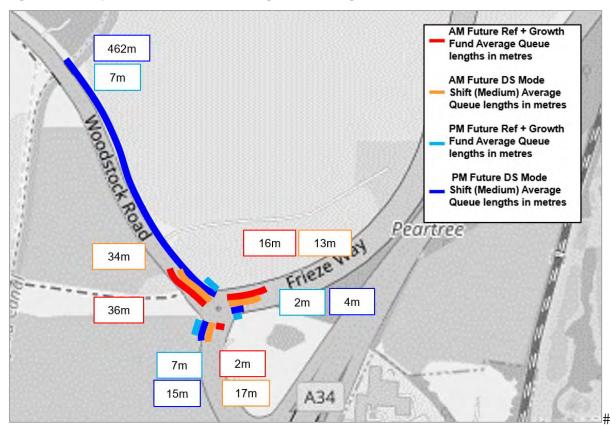


Figure 4.3: Loop Farm Roundabout Average Queue lengths (0800-0900 and 1700-1800)

Peartree Interchange

4.3.14 **Tables 4.13** and **4.14** below summarise the forecast change in average queue lengths at Peartree Interchange in the AM and PM peak periods respectively.

	07:00-08:00				C	8:00-0	9:00		09:00-10:00			
Arm	Future	DS	Mode	Shift	Future	DS Mode Shift			Future	DS Mode Shift		
	Year Ref	Low	Med	High	Year Ref	Low	Med	High	Year Ref	Low	Med	High
A34 South	11	+4	+4	+3	15	+5	+8	+5	10	+3	+2	+2
A44 Woodstock West	17	0	+1	0	63	+12	-6	-19	127	+23	+52	-41
A34 North	11	0	0	0	25	+9	+12	+9	37	+21	+19	+1
Oxford Peartree Services	3	+1	+2	0	65	+5	+10	-5	170	+13	+15	-3
A44 Woodstock East	9	+13	+11	+7	13	+14	+19	+9	10	+11	+17	+7

 Table 4.13: Peartree Interchange (A44/A34) Change in Average Queue Length (m) AM Peak

4.3.15 **Table 4.13** demonstrates that there would be a negligible increase in queue length in the AM peak period at the Peartree Interchange.

	15:00-16:00				1	6:00-1	7:00		17:00-18:00			
Arm	Future	DS Mode Shift		Future	DS Mode Shift			Future	DS Mode Shift			
	Year Ref	Low	Med	High	Year Ref	Low	Med	High	Year Ref	Low	Med	High
A34 South	9	+1	+1	+1	11	+2	+2	+2	10	+3	+2	+2
A44 Woodstock West	10	+6	+5	+6	12	+3	+4	+3	14	+10	+7	+5
A34 North	5	0	0	0	4	0	0	0	4	0	+1	0
Oxford Peartree Services	0	0	0	0	0	0	0	0	0	+1	+1	+1
A44 Woodstock East	19	+2	0	-1	39	+3	+1	-6	41	+16	+2	-8

 Table 4.14: Peartree Interchange Change in Average Queue Length (m) PM Peak

4.3.16 **Table 4.14** demonstrates that there would be a negligible increase in queue length in the PM peak period at the Peartree Interchange. **Figure 4.5** below illustrates the queue lengths in the AM and PM peak hours.

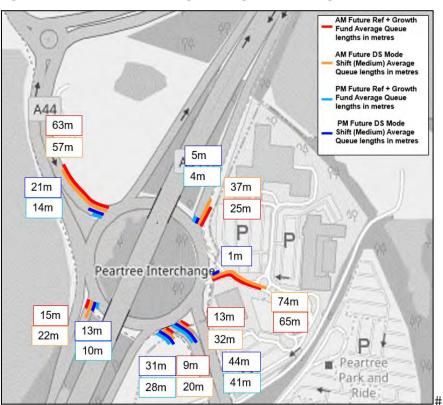


Figure 4.5: Peartree Interchange Average Queue Lengths (0800-0900 and 1700-1800)

Wolvercote Roundabout

4.3.17 **Tables 4.15** and **4.16** below summarise the forecast change in average queue lengths at Wolvercote roundabout in the AM and PM peak periods respectively.

	0	7:00-08	8:00		0	8:00-0	9:00		C	9:00-1	0:00	
Arm	Future	DS Mode Shift			Future	DS Mode Shift			Future	DS Mode Shift		
	Year Ref	Low	Med	High	Year Ref	Low	Med	High	Year Ref	Low	Med	High
A44 northern arm	19	-3	-4	-3	16	-6	-6	-7	17	-5	-6	-5
Five Mile Drive	1	-1	-1	-1	0	0	0	0	1	0	-1	-1
A40 eastern arm	20	+43	+56	+63	45	+82	+43	+13	23	+109	+33	+16
A4144	11	+2	+1	-1	17	+5	+4	0	12	+4	+2	-2
Godstow Rd	1	0	0	0	1	0	0	0	1	+6	0	0
A40 western arm	21	+6	+5	-1	35	+25	+18	0	26	+209	+95	+2


Table 4.15: Wolvercote Roundabout Change in Average Queue Length (m) AM Peak

4.3.18 **Table 4.15** demonstrates that there would be a negligible increase in queue length in the AM peak period at the Wolvercote roundabout with the exception of the A40 east and west arms. The model forecasts the A40 eastern arm to experience an increase in queue length ranging from +13m (3 vehicles) to +109m (19 vehicles) depending on the hour and level of mode shift. The model forecasts the A40 western arm to experience an increase in queue length ranging from -1m to +209m (36 vehicles) depending on the hour and level of mode shift. The queuing does not result in blocking back to adjacent junctions and only materialises in the DS low mode shift scenario in one hour. As such the cumulative impact of the PR sites at this junction is not anticipated to have a severe residual impact or introduce a road safety issue.

	15	5:00-16	5:00		1	6:00-1	7:00		17:00-18:00			
Arm	Future Year Ref		Mode S Med	Shift High	Future Year Ref		Mode S Med	Shift High	Future Year Ref		Mode S Med	
A44 northern arm	18	+8	+8	+16	18	+7	+9	+23	17	-1	+1	-3
Five Mile Drive	0	0	0	0	0	0	0	0	0	0	0	0
A40 eastern arm	18	+7	+6	+6	18	+7	+7	+6	19	+10	+7	+7
A4144	26	-10	-11	-12	27	-9	-8	-10	49	-22	-19	-27
Godstow Rd	1	+1	0	0	1	0	0	0	4	+1	+1	0
A40 western arm	26	-2	+6	-2	52	-14	-12	-21	15	+1	-2	-2

4.3.19 **Table 4.16** demonstrates that there would be a negligible increase in queue length in the PM peak period at Wolvercote roundabout. **Figure 4.6** below illustrates the queue lengths in the AM and PM peak hours.

Figure 4.6: Wolvercote Average Queue lengths (0800-0900 and 1700-1800)

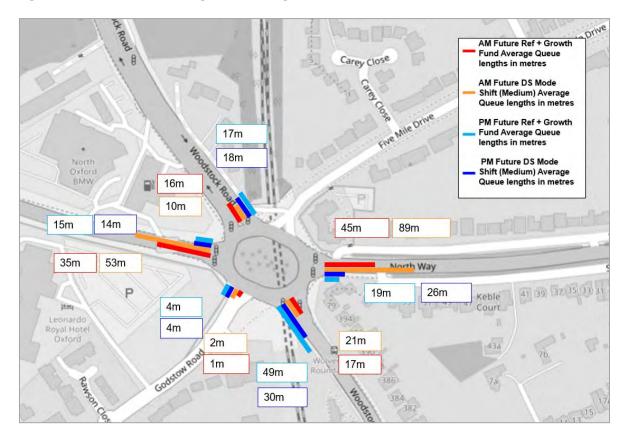

Cutteslowe Roundabout

4.3.20 **Tables 4.17** and **4.18** below summarise the forecast change in average queue lengths at Wolvercote roundabout in the AM and PM peak periods respectively.

	07:00-08:00				C	08:00-09:00				09:00-10:00			
Arm	Future			Future	Future DS Mode Shift			Future	DS Mode Shift				
	Year Ref	Low	Med	High	Year Ref	Low	Med	High	Year Ref	Low	Med	High	
A4165 north arm	29	-8	-11	-12	502	-376	-467	-473	27	+58	-2	-7	
A40 east arm	16	0	+1	0	345	-122	-239	-274	26	+6	-9	-9	
A4165 south arm	4	+2	+2	0	18	+47	+15	-2	9	+515	+23	+8	
A40 west arm	17	-5	-5	-4	36	-25	-25	-24	10	-2	-2	-1	


Table 4.17: Cutteslowe Roundabout Change in Average Queue Length (m) AM Peak

- 4.3.21 **Table 4.15** demonstrates that there would be a negligible increase in queue length in the AM peak period at Cutteslowe roundabout with the exception of the A4165 south arm. The modelling forecasts reductions in queues, particularly on the A4165 north arm and A40 east arm. The queuing in the AM peak is forecast to decrease as there is a reduction in southbound movements due to the mitigations from the IDP package, which is expected to result in more people using other modes than the car. This would reduce the number of vehicles on A4165, which would reduce the number of instances of A40 traffic giving way to A4165 traffic.
- 4.3.22 The model forecasts the A4165 south arm to experience an increase in queue length ranging from -2m to +515m (90 vehicles) depending on the hour and level of mode shift. The queuing does not result in blocking back to adjacent junctions and only materialises in the DS low mode shift scenario in one hour. As such the cumulative impact of the PR sites at this junction is not anticipated to have a severe residual impact or introduce a road safety issue.

	15:00-16:00				1	16:00-17:00				17:00-18:00			
Arm	Future DS Mode S		Shift Future		DS Mode Shift			Future	DS Mode Shift				
	Year Ref	Low	Med	High	Year Ref	Low	Med	High	Year Ref	Low	Med	High	
A4165 north arm	5	+2	+2	+2	7	+3	+2	+2	8	+4	+3	+4	
A40 east arm	19	-1	-2	-1	17	0	0	-1	18	+1	-1	0	
A4165 south arm	12	+2	-1	-1	9	+6	+3	+3	15	+22	+13	+7	
A40 west arm	19	+3	+7	+5	21	0	+3	+1	20	+6	+5	+4	

4.3.23 Table 4.18 demonstrates that there would be a negligible increase in queue length in the PM peak period at Cutteslowe roundabout. Figure 4.7 below illustrates the queue lengths in the AM and PM peak hours.



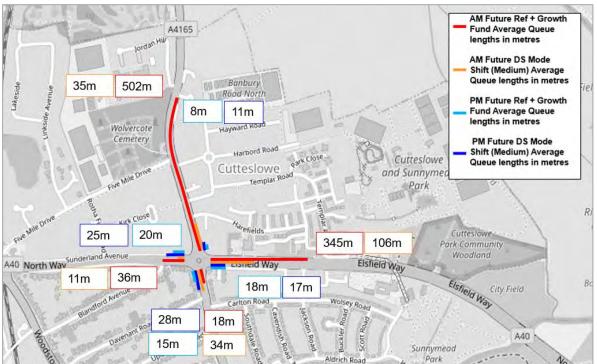

Summary

4.3.24 In summary the addition of the PR sites and their mitigation provide an overall negligible impact at junctions within the study area. Where queuing does increase, this is this is anticipated to be an infrequent occurrence or does not block back to any key junction, or is adequately mitigated by the on-going delivery of the Growth Fund works As a result, it is considered that there will not be a severe residual cumulative impact from a queuing perspective.

4.4 **Level of Service**

4.4.0 Level of service (LOS) plots provide a qualitative measure of the operation of a junction based on the identified traffic scenarios. The LOS can be predicted as a measure of delay on each arm of the junction or across the junction as a whole. **Table 4.19** below defines the LOS by six levels ranging from level A to level F.

LoS	Signalised Intersection	Non-Signalised Intersection
LOS A	Delay <10 s	or no volume
LOS B	>10s to 20s	>10s to 15s
LOS C	>20s to 35s	>15s to 25s
LOS D	>35s to 55s	>25s to 35s
LOS E	>55s to 80s	>35s to 50s
LOS F	>80s	>50s

Table 4.19: Level of Service (LOS) Analysis

- 4.4.1 The peak time operation (08:00-09:00 and 17:00-18:00) has been considered in detail across the junctions contained in the traffic model. A LOS of C or above is unlikely to affect journey reliability and the delay is unlikely to be discernible from daily variations in overall journey times.
- 4.4.2 The off-site junctions that are forecast to have a LOS of D or below, following the introduction of the package of mitigation, are indicated below. The identified junctions represent those that potentially have a residual highway impact.
- 4.4.3 The comparison has also identified where the LOS improves following the introduction of the package of mitigation, demonstrating that the development impact has been mitigated. However, the comparison has identified the junctions where the LOS also worsens, and these are identified below in Table 4.20.

Table 4.20	LOS by	Junction	Comparison
-------------------	--------	----------	------------

		LOS 08:	00-09:00			LOS 17:	00-18:00	
Junction	Future Year Ref	DS Low Mode Shift	DS Medium Mode Shift	DS High Mode Shift	Future Year Ref	DS Low Mode Shift	DS Medium Mode Shift	DS High Mode Shift
Loop Farm Roundabout	С	С	С	С	В	D	D	D
First Turn/Woodstock Road	С	D	D	С	D	D	D	D
A40 / Eynsham Road / Cassington Road	D	D	D	D	D	D	E	D
Langford Lane/Banbury Road	F	E	F	F	С	D	D	D
Banbury Road/Moreton Road	E	E	E	E	D	E	E	E
B449/Harnborough Road	С	D	D	D	А	А	А	А
Woodstock Road/Sandy Lane/Rutten Lane Roundabout	С	F	F	F	С	E	E	D
Woodstock Road/Begbroke	А	D	D	D	А	D	D	D
Woodstock Road/Cassington Road	В	F	F	F	В	F	F	F
A40/Sunderland Avenue	D	F	E	D	В	С	С	С

4.4.4 In order to identify the potential impact of the PR sites, the delay across the individual approach arms at those junctions where the LOS is forecast to worsen has been reviewed, as indicated in Table 4.21.
 Table 4.21 summarises the change in delay on each arm of the junctions in the DS scenarios compared to the Future Year Reference Case.

		AM ((:00) Peak I onds)	Delay	PM Peak	(17:00-18:0	00) Delay (Seconds)
Junction	Arm	Future Year Ref	DS Low Mode Shift	DS Medium Mode Shift	DS High Mode Shift	Future Year Ref	DS Low Mode Shift	DS Medium Mode Shift	DS High Mode Shift
	A44 south arm	6	+8	+11	+4	10	+5	+4	+2
Loop Farm	A44 north west arm	19	+9	+1	+1	16	+41	+45	+42
Roundabout	A4260 Frieze Way	40	+6	-10	-4	10	+2	+2	+4
	Total	65	+23	+2	+1	36	Mode Shift Med Mode Mathematics +5 + +41 +4 +2 + +48 +! 0 + -4 - +6 + +1 + +1 + +1 + +1 + +1 + +1 + +1 + +2 + +1 + 0 + +2 + +2 + +1 + 0 + +29 +2 +31 +3 +32 +2 +33 + +34 +3 +35 +3 +31 +3 +32 +2 +13 +3 +34 +3 +35 +1 0 0 +1 0 +1 0	+51	+48
	A4144 North	12	+1	-1	-2	8	0	+1	0
First Turn /	First Turn	12	-1	0	-3	15	-4	-2	-3
Woodstock Road	A4144 South	30	+6	+5	+3	39	+6	+6	+2
	Total	54	+6	+4	-2	62	+2	+5	-1
	A40 West	53	+6	+3	-1	53	+1	+8	+5
A40 / Eynsham Road /	A40 East	52	-9	-11	44	+5	+1	+4	+2
Road / Cassington Road	Eynsham Rd	47	-2	-2	-1	46	+2	+3	0
Noad	Total	152	-5	-10	-10	148	-1	+11	+2
	Banbury Rd South	58	0	+2	+2	23	0	+1	0
Langford	Banbury Rd North	179	-47	+16	+16	16	+2	+2	-1
Lane/Banbury Road	Langford Lane	18	-2	-2	-2	25	+29	+29	+28
	Total	255	-49	+16	+16	64	+31	+32	+30
	Marston Ferry Road	46	+4	+2	+3	51	+8	+9	+4
	Banbury Rd South	41	+1	+1	+1	47	+3	+2	0
Banbury Road/Moreton	Banbury Rd North	113	-78	-107	-33	67	+32	+22	+24
Road	Moreton Road	62	+7	+2	+5	66	+13	+18	+2
	Total	262	-66	-32	-24	231	+56	+51	+30
	B449 North	11	+1	+3	+3	2	0	0	0
B449 /	Harnborough Rd	47	+14	+29	+34	4	+1	+1	+1
Harnborough Road	B449 South	19	+7	+12	+15	3	0	0	0
	Total	77	+22	+44	+52	9	+1	+1	+1
Woodstock Road/Sandy	Woodstock Road South	21	+100	+88	+52	16	+1	0	+1
Lane/ Roundabout	Woodstock Road North	30	+20	+19	+22	21	+57	+41	+23

Table 4.21: Change in delay (seconds) at the junctions

		AM (08:00-09:00) Peak Delay (Seconds)				PM Peak (17:00-18:00) Delay (Seconds)				
Junction	Arm	Future Year Ref	DS Low Mode Shift	DS Medium Mode Shift	DS High Mode Shift	Future Year Ref	DS Low Mode Shift	DS Medium Mode Shift	DS High Mode Shift	
	Rutten Lane	6	+11	+8	+9	8	+3	+2	0	
	Total	57	+131	+115	+83	45	+61	+43	+24	
	Woodstock Rd South	4	+39	+48	+49	5	+27	+27	+27	
Woodstock	Woodstock Rd North	6	+46	+37	+40	6	+29	+22	+19	
Road /	Begbroke	20	+30	+30	+30	24	+108	+49	+51	
Begbroke	North Access	-	+41	+41	+40	-	+31	+32	+32	
	Total	30	+156	+156	+159	35	+195	+130	+129	
	A44 South	6	-1	-1	-2	4	-1	-1	-1	
Woodstock	A44 North	18	+189	+184	+135	16	+182	+188	+182	
Road/Cassingt on Road	Cassington Road	11	-10	+12	+12	14	+4	+3	+2	
	Total	35	+198	+195	+145	34	+185	+190	+183	
	A40 West	28	+25	+13	+4	14	+5	+3	+3	
A40/Sunderlan d Avenue	Sunderland Avenue	-	-	-	-	-	-	-	-	
	Total	28	+25	+13	+4	14	+5	+3	+3	

Loop Farm Roundabout

4.4.5 The results show that In the AM peak hour the model forecasts an increase in total delay at the Loop Farm roundabout of 2 seconds in the DS scenario (medium mode shift) compared to the Future Year Reference Case, indicating that the impact of development will be indiscernible. In the PM peak hour the total delay across the junction increases by 51 seconds, with a delay of 45 seconds forecast on the A44 north-west arm in the peak hour period. The increases on A44 south and A4260 Frieze Way arms are negligible.

First Turn / Woodstock Road

4.4.6 The results show that the model forecasts that the AM and PM peak hours will see an increase in delay of between 4 and 5 seconds across the entire junction in the DS scenario (medium mode shift), indicating that the impact of PR sites at this junction will be negligible.

A40 / Eynsham Road / Cassington Road

4.4.7 In the AM peak hour, the entire junction is forecast to see a decrease in delay in the DS scenario (medium mode shift) compared to the Future Year Reference Case of 10 seconds. In the PM peak hour the junction is forecast to see an increase of 11 seconds in delay in the DS scenario (medium mode shift) compared to the Future Year Reference Case.

Langford Lane/Banbury Road

4.4.8 The total increase in delay at the junction is forecast to be 16 seconds in the AM peak hour and 32 seconds in the PM peak hour in the DS scenario (medium mode shift) compared to the Future Year Reference Case. Overall, this is a minimal impact at this junction.

Banbury Road/Moreton Road

4.4.9 In the AM peak hour, the total delay reduces across the entire junction by 32 seconds in the DS scenario (medium mode shift) compared to the Future Year Reference Case. In the PM peak hour, the total delay is forecast to increase across the junction by 51 seconds with the increases predicted on the Banbury Road (north) and Moreton Road arms being 22 and 18 seconds, respectively. The increases in delay on Banbury Road (south) and Marston Ferry Road is negligible. Overall, this is a minimal impact at this junction in the PM peak hour.

B449/Harnborough Road

4.4.10 The total increase in delay at the junction is forecast to be 44 seconds in the AM peak hour and 1 second in the PM peak hour in the DS scenario (medium mode shift) compared to the Future Year Reference Case. In the AM peak hour, the increase in delay is primarily experienced on the Harnborough Road arm, where there is forecast to be a 29 second delay increase. The impact on the other arms is negligible. Overall, there is considered to be a minimal impact on delays at this junction.

Woodstock Road/Sandy Lane/Rutten Lane Roundabout

4.4.11 There is forecast to be an increase in the total junction delay of 115 seconds in the AM peak hour in the DS scenario (medium mode shift) compared to the Future Year Reference Case. In the PM peak the increase in the total delay is forecast to be 43 seconds. There is forecast to be a delay of 88 seconds on Woodstock Road (south) arm in the AM peak hour and the impact across the Woodstock Road (north) arm and Rutten Lane during this period is negligible. In the PM peak hour, there is forecast to be an increase of 41 seconds on Woodstock Road (north). The increase on Woodstock Road (south) and Rutten Lane is negligible.

Woodstock Road/Begbroke

4.4.12 The total increase in delay at the junction is forecast to be 156 seconds in the AM peak hour and 130 seconds in the PM peak hour in the DS scenario (medium mode shift) compared to the Future Year Reference Case. However, there is a maximum of 49 seconds increase in delay on any one arm in the weekday peak hours in the DS scenario (medium mode shift), which is not considered to be a severe impact.

Woodstock Road/Cassington Road

4.4.13 The total increase in delay at the junction is forecast to be 195 seconds in the AM peak hour and 190 seconds in the PM peak hour in the DS scenario (medium mode shift) compared to the Future Year Reference Case. The majority of the delay in the AM and PM peak hours materialises on the A44 northern arm (i.e. southbound movement) as it is at this location that southbound traffic is required to merge from two lanes to one lane.

A40/Sunderland Avenue

4.4.14 The total increase in delay at the junction is forecast to be 13 seconds in the AM peak hour and 3 seconds in the PM peak hour in the DS scenario (medium mode shift) compared to the Future Year Reference Case, which would have a negligible effect on the junction.

SECTION 5 Summary and Conclusion

5.0 **Summary**

5.0.0 Oxfordshire County Council (OCC) has requested that the North Oxford VISSIM model is used to assess the cumulative impact of PR sites generated traffic on the operation of the highway network, in a future year when all the PR sites are fully occupied. This Technical Note sets out the traffic modelling outcomes of the modelling to support planning applications associated with the PR sites located to the north of Oxford, within Cherwell District.

Modelling Parameters

- 5.0.1 All committed development as identified by the PR consultants and OCC has been included in the future year model.
- 5.0.2 The trip generation has been derived for each of the PR sites based on their location, opportunity for trips to be undertaken via active modes and public transport, and likely internalisation, which will occur. The proposed trips have been agreed with OCC in advance.
- 5.0.3 To ensure a realistic level of background growth and growth occurring from committed development, trends in historic growth and housing delivery has been considered, alongside the DfT projections for growth. A methodology to cap growth and allow for realistic forecasts to be derived for assignment within the model has been outlined, such that the network capacity is not entirely exceeded prior to any development assessment work.
- 5.0.4 The resultant traffic figures assigned within the VISSIM model also accord with the reductions being targeted through Oxfordshire's LTCP. Continued application of increases in traffic volumes through the model forecasting would represent a significant failure in OCCs policy approach.
- 5.0.5 Planned and committed transport infrastructure designed to address growth elsewhere, as agreed with OCC have been included within the 'with development and mitigation' modelling runs.
- 5.0.6 In allocating the PR sites, CDC and OCC had due regard to the Oxford Transport Strategy approach to delivering growth, which is predicated on the assumption that wholesale increases in road capacity is no longer a sustainable or acceptable option. Furthermore, it was recognised that there are opportunities to build upon and enhance the current sustainable transport networks to ensure their use is prioritised and maximised. These measures were developed by OCC having regard to its Strategic Transport Assessment (STA) and have been included in the IDP in Appendix 4 of the Local Plan.

- 5.0.7 The range of mitigation measures included within the IDP have be tested within the model. The Vectos MicroSim Mode Shift Assessment Discussion Note sets out the assumptions to be applied to the demands within the VISSIM model to replicate the expected effects of changes in travel behaviour arising from the delivery of enhancements to the sustainable and active travel networks.
- 5.0.8 OCC's LTCP, adopted July 2022, outlines a clear vision to deliver a net-zero Oxfordshire transport and travel system by 2040, reducing private vehicle use, and prioritising walking, cycling, and public transport. The LTCP sets out the way changes to the county's transport and travel system will be needed. This multi-pronged approach sets out the reshaping of the way places are connected, and infrastructure is upgraded and reconfigured in order to achieve these aspirations. The approach includes the forthcoming area transport strategies and transport corridor strategies, OCC's new Parking Standards for New Developments (2022), the OCC Street Design Guide (2021), and a shift from an approach to transport planning characterised as 'predict and provide' towards adopting a 'decide and provide' approach instead.
- 5.0.9 The traffic modelling undertaken follows the 'Decide and Provide' approach and has considered multiple scenarios. The modelling process has effectively run multiple scenarios as it has tested cumulate impacts of various modal shift assumptions.

Modelling Outcomes

- 5.0.10 An assessment has been provided for the following:
 - Network statistics across the network;
 - Queue lengths and Delay for key junctions;
 - Journey times across agreed key routes; and
 - An assessment of the Level of Service for the key junctions.

5.1 **Conclusion**

- 5.1.0 In conclusion
 - Overall across the modelled peak periods and network, the modelling shows that vehicles are able to travel through the network with latent demand continuing to remain low (i.e. vehicles not able to enter the network).
 - Across the network the model forecasts a negligible effect on vehicle speed when compared with the Future Reference Case.

- Where queuing increases at junctions, this is not of a magnitude that would result in a material effect on the highway network. For example, no junctions are blocked as a result of the PR sites and the mitigation coming forward.
- Where the Level of Service of junctions has worsened as a result of the PR sites, further assessment has been undertaken on each arm of the junction. The detailed assessment identifies that there are no residual effects which would be considered severe.
- 5.1.1 The works set out in the IDP of the Local Plan provide the basis for the development of a sustainable transport network which will support the proposed PR sites allocations through limiting the need to travel by car and offering a genuine choice of transport modes in accordance with the NPPF.
- 5.1.2 A range of mitigation measures included within the IDP have be tested within the model and it is evident that the provision of active travel opportunities and public transport interventions, along with changes in travel behaviour arising from the delivery of enhancements to the sustainable and active travel networks will mitigate the impacts arising from the PR sites.
- 5.1.3 Given that the modelling undertaken makes no allowance for the ambitious reductions in background traffic set out in the Council's adopted LTCP and therefore the results presented herein are arguably a 'worst case', it is concluded that subject to the appropriate apportionment of contributions towards the infrastructure identified as being necessary to mitigate the cumulative impact of development, the PR sites cannot be regarded as having either a severe cumulative impact on the highway network or an unacceptable impact on highway safety which would otherwise give rise to grounds for objection in line with paragraph 111 of the NPPF.

Appendix A

REPORT

Forecasting Report

Oxford PR Site Testing VISSIM

May 2023

Contents

1	Introduction	5
2	Background	5
	Re-Cap – Preferred Package	6
3	Model Updates Committed Developments	7
	Eynsham Garden Village (20/01734/OUT)	8
	West Eynsham Strategic Development Area (20/03379/OUT)	11
	West Thornbury Road Eynsham	12
	Eynsham Nursery and Plant Centre (15/00761/FUL)	12
	Land East of Woodstock (Policy EW1c) (16/01364/OUT)	14
	Barton Park (13/01383/OUT)	15
	Wolvercote Papermill (13/01861/OUT)	18
	St. Frideswide Farm (SP24) (21/01449/FUL)	19
	Hill Rise, Woodstock (Policy EW4) (21/00189/FUL)	22
	Banbury Road, Woodstock (Policy EW5) (21/00217/OUT)	23
	Oxford North (CS6) (18/02065/OUTFUL)	25
	Land East of Park View (22/01715/OUT)	28
	Begbroke Science Park (08/00803/OUT)	29
	Oxford Technology Park	31
4	Model Updates PR Sites	33
	PR6a and PR6b (Land East and Land West of Oxford Road)	33
	PR7a (Land South East of Kidlington)	36
	PR8 Site (Land East of the A44)	38
	PR9 Site (Land West of Yarnton)	41
	Other PR Sites	45
5	VISSIM Demand Summary	47
	Assigned Zones	48

6	Summary & Conclusion	48	3
---	----------------------	----	---

1 Introduction

- 1.1 Vectos Microsim (VM) has been commissioned by a multi-consultancy group working on behalf of a number of Partial Review (PR) Sites that are allocated within the adopted Cherwell Local Plan (Part 1) Partial Review.
- 1.2 VM is providing VISSIM microsimulation modelling support to all sites with a view to assisting in developing a suitable mitigation strategy for all Sites to come forward within the Local Plan period, working together with the Local Authority to agree an approach for the delivery of any infrastructure requirements and how these may be phased and financed.
- 1.3 The Partial Review (PR) Sites and their representatives are as follows:
 - i) PR6a (Land east of Oxford Road) i-Transport LLP
 - ii) PR6b (Land west of Oxford Road) KMC Transport Planning
 - iii) PR7a (Land South East of Kidlington) Brookbanks
 - iv) PR8 (Land East of the A44) within the ownership of Oxford University Development (OUD) KMC Transport Planning
 - v) PR8 (Land East of the A44) within the ownership of Hallam Land Glanville
 - vi) PR9 (Land West of Yarnton) Vectos
- 1.4 There are two other 'PR' Sites within the study area; PR6c (a proposed new Golf Course at Frieze Farm) and PR7b (Land at Stratfield Farm). In the case of PR6c, this is not considered to be a significant generator of peak hour traffic. In addition, the existing North Oxford Golf Club sits on the plot of land proposed for PR6b, currently designated for a residential development, meaning that the net impact of not explicitly including PR6c is negligible as the trips associated to the Golf Course are already included within the Baseline demands. The consultant on behalf of PR7b is not currently engaged with this tranche of work, however assumptions have been made to account for the site to ensure a robust assessment and this will be discussed later in the document.

2 Background

- 2.1 VM has received a series of VISSIM modelling files and documentation to be used as a basis for microsimulation model testing, as per the below:
 - i) North Oxford VISSIM Base Model Filename "BaseModel2018_v37"
 - ii) Local Model Validation Report¹
 - iii) North Oxford VISSIM Future Year Model Filename "NOC PP A44 Sens Test O1D"
 - iv) Forecasting Report²

¹ North Oxford VISSIM LMVR_Issue_v3, Atkins January 2019 ² North Oxford Corridor Study Mar 2021_v0.14, SKANSKA/CAPITA March 2021

- 2.2 Both the VISSIM Base and Future Year Models include AM and PM scenarios covering the following time periods:
 - i) 06:30-10:30 (07:00-10:00 assessment period, with 30 minute warm up and cool down)
 - ii) 14:30-18:30 (15:00-18:00 assessment period, with 30 minute warm up and cool down)
- 2.3 VM has re-run the Base models (in VISSIM version 10.00-12, as per the received files) and found that results reported from these runs are identical to those presented within the LMVR. VM has also run the Future Year models (in VISSIM version 10.00-02) and compared them to the results of the 'Preferred Package' (PP) modelling presented within the Forecasting Report and found them to be very similar thereby giving assurances that the models used for the foundation of this testing are accurate.

Re-Cap – Preferred Package

- 2.4 SKANKSA and CAPITA Real Estate and Infrastructure were appointed by Oxfordshire County Council (OCC) to carry out microsimulation modelling iteratively testing a series of proposed schemes for four distinct corridors:
 - i) Corridor 1A: Cassington to Loop Farm (Cassington Roundabout)
 - ii) Corridor 1B: Kidlington Roundabout
 - iii) Corridor 1C: Kidlington to Cutteslowe (Oxford Parkway Junction)
 - iv) Corridor 1D: Loop Farm and Peartree Roundabouts
- 2.5 These were initially tested within the 2018 VISSIM Base model that underpins this testing, as well as scheme optioneering through local junction modelling including LINSIG and TRANSYT.
- 2.6 OCC requested that the schemes also be tested through a forecast 2023 model. Details of growth factors used and committed housing and employment development sites included, public transport amendments, and highway schemes and network changes applied to the 2018 Base to forecast the model to 2023, are found within the Forecasting Report³.
- 2.7 The results of the 2023 testing put forward the preferred options as follows:
 - i) Corridor 1A: Staggered pedestrian crossing on the northern side of Cassington Roundabout⁴
 - ii) Corridor 1B: Option E was chosen, which includes signalisation and enhanced bus facilities at Kidlington Roundabout⁵
 - iii) Corridor 1C: No scheme proposed, as testing in the Base year scenario showed very little benefit from either of the two schemes selected for testing; and
 - iv) Corridor 1D: Enhanced pedestrian facilities on northern and eastern arms, and a southbound bus lane⁶

³ North Oxford Corridor Study Mar 2021_v0.14, SKANSKA/CAPITA March 2021, Chapter 6

⁴ North Oxford Corridor Study Mar 2021_v0.14, SKANSKA/CAPITA March 2021, Chapter 7

⁵ North Oxford Corridor Study Mar 2021_v0.14, SKANSKA/CAPITA March 2021, Chapter 8

⁶ North Oxford Corridor Study Mar 2021_v0.14, SKANSKA/CAPITA March 2021, Chapter 9

- 2.8 Subsequent review of the approved scheme drawings around Loop Farm show that the pedestrian facilities proposed are no longer part of the scheme delivery. As such these have been removed from the modelling.
- 2.9 The overarching conclusion of this Preferred Package (PP) model was that it provided a series of measures aimed primarily at sustainable transport users that were not significantly to the detriment of private vehicle users.

3 Model Updates || Committed Developments

- 3.1 VM has undertaken a series of updates to the received 2023 PP model with the task of developing a Future Year Reference Case for the purposes of this PR testing, which moves the forecast year to the full occupation of the PR sites.
- 3.2 The Local Plan Part 1 Partial Review runs to 2031. The PR sites are expected to be constructed and completed during this period up to 2031, albeit PR8 is expected to be completed shortly after by 2033. Therefore, the future horizon period will establish local highway network conditions, taking into account any appropriate background traffic growth, consented development traffic and PR site traffic upon full completion.
- 3.3 As the 2023 PP model includes partial build out of some of these sites, as well as partial assumptions for the PR sites, the first step was to set Baseline demands back to the 2018 position. This was carried out simply by replacing the matrices within the 2023 model with those contained within the 2018 Base. The re-forecasting process then included a 'layering-up' of specific committed development sites between the 2018 Base year and the 2031 forecast year. The following list provides the committed development sites requested by OCC to be included within the modelling:

Committed Development Sites:


i)	Eynsham Garden Village	viii)	St. Frideswide Farm (SP4)
ii)	West Eynsham Strategic Development Area (SDA)	ix)	Hill Rise, Woodstock (Policy EW4)
iii)	West Thornbury Road Eynsham	x)	Banbury Road, Woodstock (Policy EW5)
iv)	Eynsham Nursery and Plant Centre	xi)	Oxford North (CS6)
v)	Land East of Woodstock (Policy EW1c)	xii)	Park View
vi)	Barton Park	xiii)	Begbroke Science Park
vii)	Wolvercote Papermill Site	xiv)	Oxford Technology Park

3.4 VM will discuss each committed site in turn, detailing its location, site access arrangements, mitigation, and demand assumptions for including the site within the forecasting process.

Eynsham Garden Village (20/01734/OUT)

- 3.5 Eynsham Garden Village (Land North of A40; A40 Section from Barnard Gate to Eynsham Roundabout, Eynsham, Oxfordshire) is identified in the Local Plan as an area for strategic growth. The site is proposed to be a mixed-use development providing both residential and employment growth, alongside a local centre, education, leisure and community facilities.
- 3.6 The highway proposals for the Garden Village involve new links between Lower Road and Cuckoo Lane, a new junction onto the A40, and then further connections southwards circumventing Witney Road on the west side before joining the B4449. As this Site is located to the far west of the VISSIM model extent, a simplified approach was taken whereby development trips are loaded onto existing Zone 26, which represents A40 western zone acting as the generator/attractor of all A40 traffic.
- 3.7 A map showing the location of Eynsham Garden Village within the context of the VISSIM modelling is provided below:

Figure 1: Eynsham Garden Village Site Location

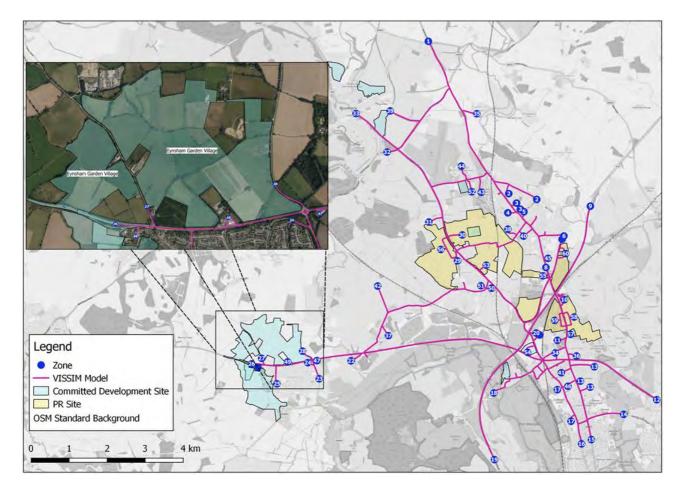

- 3.8 In 2020 Wood, on behalf of OCC, carried out VISSIM modelling to test the highway impact of the Garden Village and West Eynsham SDA development proposals. OCC has identified that trip assumptions for that study should be replicated for this one, therefore trip generation has been taken from Table 1 of the Wood report⁷.
- 3.9 The Wood Report only reports peak hour trip generation (08:00-09:00 and 17:00-18:00). Therefore a TRICS Residential Total Person temporal profile is calculated to estimate the vehicle trips in the shoulder peaks. The TRICS rates used for this, and for other committed development sites where applicable, are as follows:

	Total Person Trip Rates		Proportions							
	In	Out	In	Out	In	Out				
AM Peak Period										
07:00-08:00	0.109	0.494	0.603	54%	66%	63%				
08:00-09:00	0.202	0.749	0.951	100%	100%	100%				
09:00-10:00	0.198	0.263	0.461	98%	35%	48%				
	PM Peak Period									
15:00-16:00	0.518	0.276	0.794	89%	101%	93%				
16:00-17:00	0.520	0.269	0.789	89%	98%	92%				
17:00-18:00	0.584	0.274	0.858	100%	100%	100%				

Table 1: TRICS Residential Temporal Profile

- 3.10 The Report suggests that distribution was informed by SATURN OSM outputs. A VISUM model was then developed to assign the forecast trips through the VISSIM model extent, and finally outputs were converted back to static routes and run through VISSIM via static assignment. The output distribution is not provided within the report, therefore provided within the TA⁸ are illustrations of the direction from/to which development trips are forecast to be travelling. These suggest that 28% of AM peak hour demand, and 35% of PM peak hour demand, travels to/from A40 east. Trips travelling north are expected to travel via Lower Road towards A4095 Bladon and onto the A44. Trips travelling west are expected to join or egress the A40 via the western-most proposed Site access and therefore not interact with the VISSIM model extent. Trips travelling south are expected to travel via B4044 towards Botley and onto the A420 or A34. As a result only eastern trips are considered.
- 3.11 These total trip generations are multiplied by the percentages of trips travelling to/from the east and assigned to existing Zone 26.
- 3.12 Distribution present within the existing zone 26 in the VISSIM model is interrogated to provide the wider distribution assumptions across the whole VISSIM network. Some zones are excluded as they a) refer to destinations/origins that would be travelled to/from by routes other than the A40, or b) they refer to sites that could be considered 'internal' as they are within the immediate vicinity of the proposed Site. This ensures a robust assessment of trips travelling along the A40 towards (or away from) the primary study area by discounting any short-distance trips within the Eynsham area that may have resulted by including those proximal zones within the distribution calculations.

 ⁷ Garden Village AAP and West Enysham SPD Evidence Base, 2031 Forecast Year Modelling, July 2020.
 ⁸ 20_01734_OUT-TRANSPORT_ASSESSMENT-856882, Figures 6-26 and 6-27.

3.13 Tables showing the derived in/out trip generation totals within the VISSIM model extent related to the Eynsham Garden Village committed site for each hour during the AM and PM peaks are given below.

Table 2: AM In/Out Totals for Eynsham Garden Village

	07:00-08:00		08:00	-09:00	09:00-10:00	
	In	Out	In	Out	In	Out
Eynsham Garden Village	163	144	303	218	297	77

Table 3: PM In/Out Totals for Eynsham Garden Village

	15:00-16:00		16:00	-17:00	17:00-18:00	
	In	Out	In	Out	In	Out
Eynsham Garden Village	221	351	222	342	249	349

West Eynsham Strategic Development Area (20/03379/OUT)

- 3.14 The West Eynsham Strategic Development Area (SDA) is allocated as a site to accommodate a new sustainable and integrated community of approximately 1000 dwellings with supporting services and infrastructure. The total site covers approximately 88 hectares and lies immediately to the west of Eynsham.
- 3.15 The site is to be accessed via the fourth (southern) arm of a new A40 roundabout to be introduced as part of the Eynsham Park and Ride proposals.
- 3.16 A Figure showing the location of the West Eynsham Strategic Development Area within the context of the wider VISSIM model is provided below:

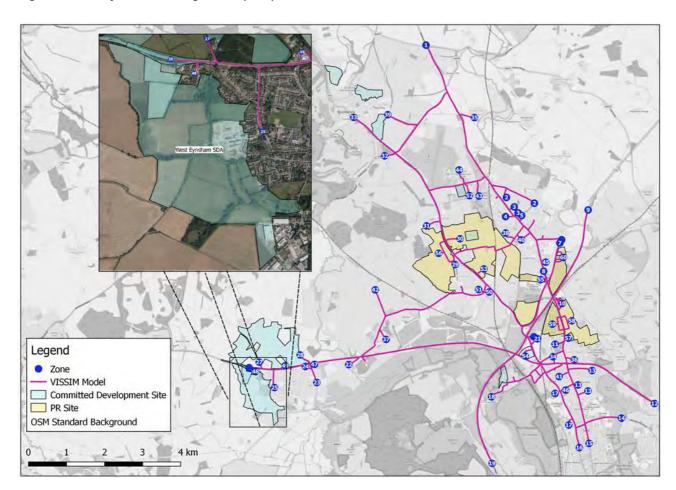


Figure 2: West Eynsham Strategic Area (SDA) Site Location

3.17 As per the methodology for calculating the Garden Village trip generation, Table 1 of the Wood report is used.

3.18 This site sits adjacent to Eynsham Garden Village, just on the southern side of the A40 rather than the northern side. As a result a similar approach has been taken to distribution across the wider VISSIM model. The same proportions of local distribution (i.e. north/east/south/west movements) has been applied to the total trip generation, and then distributed further based on the baseline distribution for zone 26 in the VISSIM model (which represents A40 West).

1	2

Table 4: AM In/Out Totals for West Eynsham Strategic Development Area (SDA)

	07:00-08:00		08:00	-09:00	09:00-10:00	
	In	Out	In	Out	In	Out
West Eynsham (SDA)	20	51	37	77	36	27

Table 5: PM In/Out Totals for West Eynsham Strategic Development Area (SDA)

	15:00-16:00		16:00·	-17:00	17:00-18:00	
	In	Out	In	Out	In	Out
West Eynsham (SDA)	88	51	88	49	99	50

West Thornbury Road Eynsham

3.19 West Thornbury Road Eynsham is a committed development within the boundaries of the West Eynsham SDA and therefore, in/out trip generation has been considered within the calculations for the full West Eynsham Strategic Development Area (SDA) allocation as described above.

Eynsham Nursery and Plant Centre (15/00761/FUL)

- 3.20 Eynsham Nursery and Plant Centre is a committed development site for 77 dwellings located west of Eynsham, sitting within the West Eynsham SDA. The site had not been delivered at the time of the VISSIM Base model development but has been since and is therefore included in this forecasting exercise.
- 3.21 An account for this site had been made during the forecasting process undertaken by SKANSKA/CAPITA as part of their work for the North Oxford Corridor 2023 PP modelling. Trips were assigned to the same zone that previously served the Nursery and Plant Centre. Having now been built, the site is actually accessed by an extension to Old Witney Road and a connection to the old access driveway that served the Nursery and Plant Centre, which has been stopped up at the request of OCC to avoid a direct link onto the A40.
- 3.22 The starting point for this exercise was to set the baseline demands to the 2018 position before re-forecasting, and so this exercise seeks to re-account for the trips associated with this development. The minor network updates required to formally and fully account for the delivery of this site have not been applied to the model as they would have no material impact on the outcomes of the testing.
- 3.23 Map showing the location of the Eynsham Nursery and Plant Centre along with the wider model network is provided below.

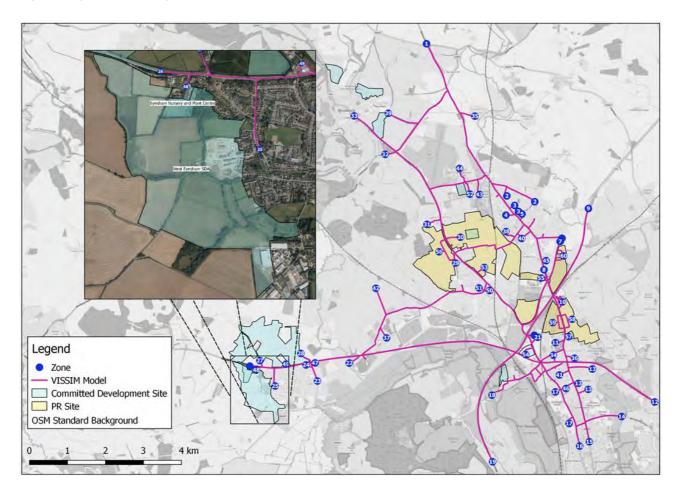


Figure 3: Eynsham Nursery and Plant Centre Site Location

- 3.24 Similarly to the Eynsham Garden Village and West Eynsham SDA sites, the same distribution assumptions are applied and Zone 26 (A40 West) is considered to be the development zone. This simplifies the process of including all committed development sites, whilst taking a robust approach to corridor flows along the A40 by ensuring vehicles are easily able to access the main route into Oxford.
- 3.25 Tables showing the in/out trip generation totals of the Eynsham Nursery and Plant Centre for each hour during the AM and PM peaks are provided below.


	07:00-08:00		08:00-09:00		09:00-10:00	
	In	Out	In	Out	In	Out
Eynsham Nursery and Plant Centre	2	6	3	9	3	3


Table 7: PM In/Out Totals for Eynsham Nursery and Plant Centre

	15:00-16:00		16:00	-17:00	17:00-18:00	
	In	Out	In	Out	In	Out
Eynsham Nursery and Plant Centre	9	6	9	6	10	6

Land East of Woodstock (Policy EW1c) (16/01364/OUT)

- 3.26 Land East of Woodstock is a committed development site located north of the A44 Oxford Road. The site includes proposals for up to 300 residential dwellings and up to 1,100sqm of A1/A2/B1/D1 floorspace. The Site is served via two accesses; one via A44 Oxford Road and the other via Shipton Road. These are assigned to zones 33 and 39, and these are assumed to be the development zones.
- 3.27 A Figure showing the location of the Land East of Woodstock within the context of the wider VISSIM model is provided below.



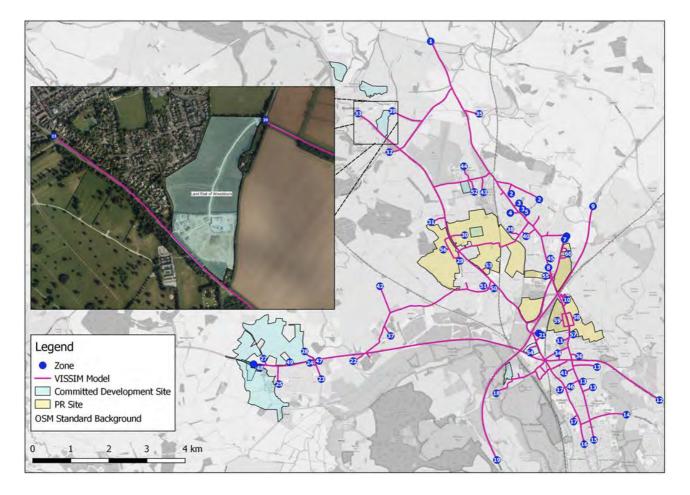

3.28 The TA⁹ outlined trip generation for the peak hours split between residential and office-based employment trip purposes. The TA also provides percentages for trip distribution across the wider Oxford area. These assumptions are used to assign one or more VISSIM zones to the links/locations provided within the trip assignment calculations and VISSIM matrices are then derived therefrom. Trip generation is available within the TA for all model peak hours via the residential and office trip rates present within Appendix C of the TA and Appendix B of the TA Addendum¹⁰, respectively.

⁹ 16_01364_OUT-ENVIRONMENTAL_STATEMENT_TECH_APPENDIX_E1-420981

¹⁰ 16_01364_OUT-15291-03B_ADDENDUM_TRANSPORT_ASSESSMENT_13_-449339

3.29 Tables showing the in/out trip generation totals for the Land East of Woodstock site for each hour during the AM and PM peak periods are given below.

Table 8: AM In/Out Totals for Land East of Woodstock

	07:00-08:00		08:00-09:00		09:00-10:00	
	In	Out	In	Out	In	Out
Land East of Woodstock	26	63	46	84	44	44

Table 9: PM In/Out Totals for Land East of Woodstock


	15:00-16:00		16:00-17:00		17:00-18:00	
	In	Out	In	Out	In	Out
Land East of Woodstock	54	44	66	55	80	65

Barton Park (13/01383/OUT)

- 3.30 Barton Park is a committed development site lying just beyond the extent of the VISSIM network, located northwest of Headington Roundabout and east of the A40 Northern Bypass Rd. The outline application is for a maximum of 885 residential units, 2500sqm of employment, Care Home, School and community facilities.
- 3.31 Trip generation data for the peak hours only were available from the Transport Assessment¹¹. Trip generation for the shoulder hours was calculated via the TRICS Residential Total Person temporal profile rates as provided in Table 1.
- 3.32 In regards to distribution, VM are currently engaged on a separate project within Oxfordshire that required the calculation of Barton Park distribution based on a combination of 2011 Census Travel to Work data and Google maps routing data to derive the most likely route. This resulted in a distribution plot as per the image overleaf:

¹¹ 13_01383_OUT-EIA_TRANSPORT_ASSESSMENT_PART_1_OF_2-1373941, Table 8.8

Figure 5: Barton Park Trip Distribution

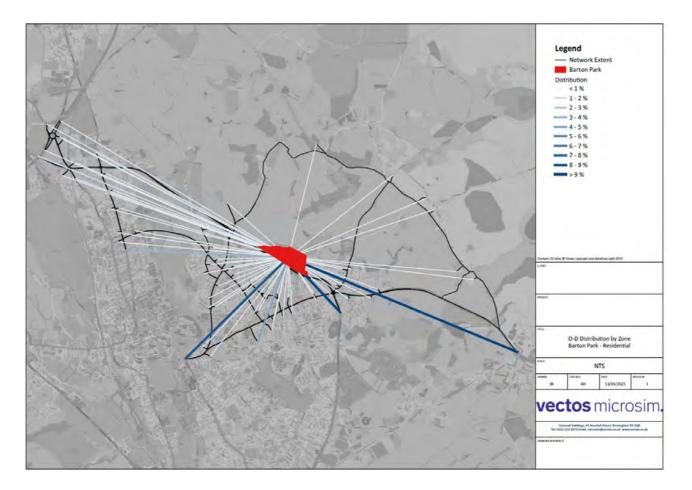

- 3.33 As the VISSIM network for this testing includes only part of this network, only trips travelling to/from west of Marston Interchange, and to/from west of the B4495 bridge over the River Cherwell, are considered which equates to a total of 10.48% of all trips interacting with the model network. As shown in the distribution plot, many of the site's trips are forecast to travel to/from Central Oxford, A40 Eastern By-Pass Road or A40 London Road towards Wheatley.
- 3.34 Depending on which origin/destination trips are travelling from/to, the development zone for Barton Park is assumed to be either 12 or 14, which relates to A40 East and B4495 Marston Ferry Way respectively. Trips travelling between Barton Park and A4165 or A4144 are assumed to travel via B4495 and therefore assume zone 14 as their entry/exit point to the VISSIM model, whereas all other trips assumed zone 12.

3.35 A Figure showing the location of Barton Park within the context of the wider VISSIM model is provided below.

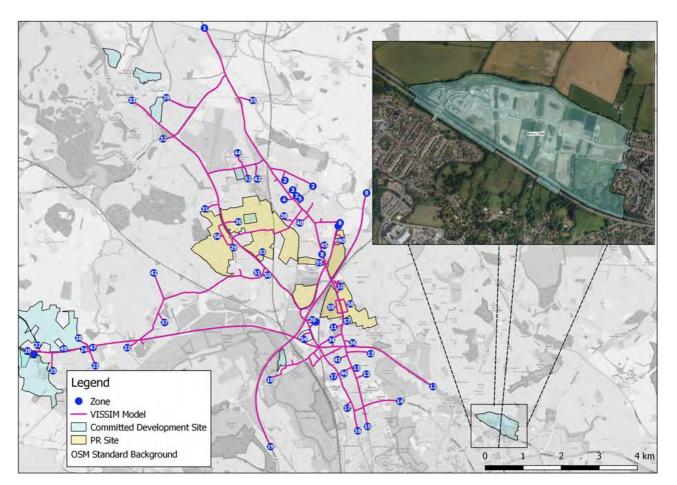


Figure 6: Barton Park Site Location

3.36 Tables showing the in/out trip generation totals of the Barton Park for each hour during the AM and PM peaks are given below.

Table 10: AM In/Out Totals for Barton Park

	07:00-08:00		08:00-09:00		09:00-10:00	
	In	Out	In	Out	In	Out
Barton Park	9	19	17	29	17	10


Table 11: PM In/Out Totals for Barton Park

	15:00-16:00		16:00-17:00		17:00-18:00	
	In	Out	In	Out	In	Out
Barton Park	38	34	39	32	44	33

Wolvercote Papermill (13/01861/OUT)

- 3.37 Wolvercote Papermill is a committed development site located north of Oxford and southwest of Wolvercote Roundabout. The site proposes up to 190 residential units, employment space, community facilities, public open space and ancillary services.
- 3.38 The VISSIM development zone is assumed to be Zone 18, which represents Godstow Road which will serve the Site. The TA contains the forecast trip generation for the Site¹² and these vehicles have been assigned to this zone. The trip generation for the purposes of the VISSIM model have been adjusted to account only for those trips that will interact with the VISSIM network, i.e. any trips approaching or exiting the site via Godstow Road west towards Wytham have been excluded.
- 3.39 Distribution across the VISSIM model area is based on the existing distribution present within Zone 18 of the 2018 Base model.
- 3.40 The Figure below showing the location of the Barton Park within the context of the wider VISSIM model is provided below.



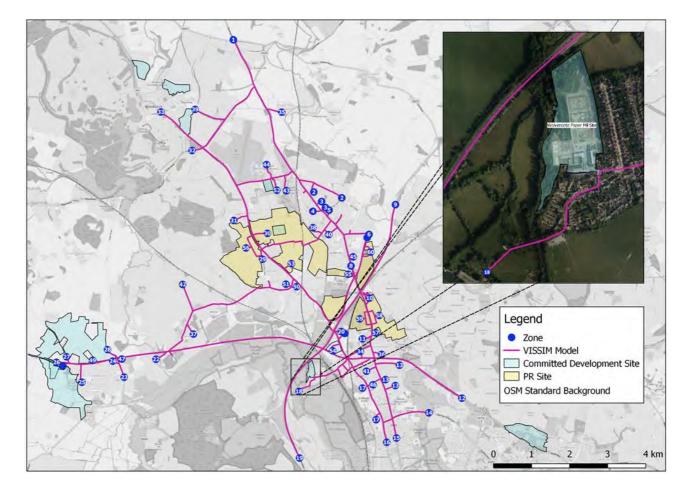

¹² 13_01861_OUT-TRANSPORT_ASSESSMENT-1386134, Table 7.2

3.41 Tables showing the in/out trip generation totals of the Wolvercote Papermill Site for each hour during the AM and PM peaks are given below.

Table 12: AM In/Out Totals for Wolvercote Papermill Site

	07:00-08:00		08:00-09:00		09:00-10:00	
	In	Out	In	Out	In	Out
Wolvercote Papermill Site	5	47	8	67	8	34

Table 13: PM In/Out Totals for Wolvercote Papermill Site

	15:00-16:00		16:00-17:00		17:00-18:00	
	In	Out	In	Out	In	Out
Wolvercote Papermill Site	35	17	36	17	45	20

St. Frideswide Farm (SP24) (21/01449/FUL)

- 3.42 St. Frideswide Farm is a committed development site proposing 134 dwellings and community facilities. The site is located along the northern edge of Oxford City and immediately north of Cutteslowe Roundabout. It is served via a priority T-junction with Oxford Road.
- 3.43 The site lies within the model extent but with no existing zone to assign the trips to. Therefore, a new zone (zone 57) has been assigned to this site.
- 3.44 Trip generation for the peak hours is taken directly from the TA¹³. Trip generation for the shoulder hours is calculated via the TRICS Residential Total Person temporal profile, as provided in Table 1. Distribution is informed by the existing distribution to/from Zone 36, which represents a residential zone immediately south of this proposed location (i.e. Harefields).

¹³ 21_01449_FUL-TRANSPORT_ASSESSMENT__PART_1_-2552872, Table 6.5

3.45 The Figure below presents the location of St. Frideswide Farm in the context of the wider model network.

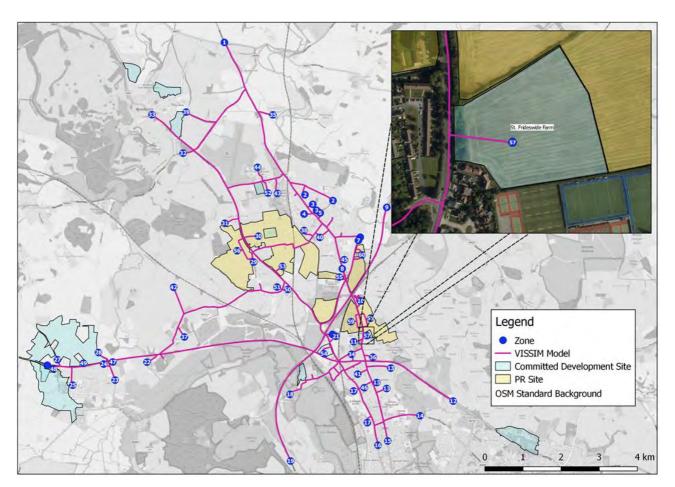


Figure 8: St. Frideswide Farm Site Location

vectos.co.uk

3.46 The Figure below shows the proposed site access arrangement for St. Frideswide Farm.



Figure 9: St. Frideswide Farm Site Access Arrangements

3.47 Tables showing the in/out trip generation totals for St. Frideswide Farm Site for each hour during the AM and PM peaks are provided below.

Table 14: AM In/Out Totals for St. Frideswide Farm

	07:00-08:00		08:00-09:00		09:00-10:00	
	In	Out	In	Out	In	Out
St. Frideswide Farm	8	33	14	51	14	18

Table 15: PM In/Out Totals for St. Frideswide Farm


	15:00-16:00		16:00-17:00		17:00-18:00	
	In	Out	In	Out	In	Out
St. Frideswide Farm	34	16	34	16	38	16

21

Hill Rise, Woodstock (Policy EW4) (21/00189/FUL)

- 3.48 Hill Rise is a committed development site located North of Hill Rise in Woodstock. The hybrid planning application consists of 74 dwellings, 60sqm of community space and associated facilities and infrastructure.
- 3.49 Trip generation for the peak hours are taken directly from the TA¹⁴. Shoulder hours are calculated via the TRICS Residential Total Person temporal profile, as provided in Table 1.
- 3.50 The Site lies just north of the VISSIM Model network, served by A44 Manor Road in Woodstock. In the VISSIM model this location is represented by Zone 33 and development trips are assigned to this zone.
- 3.51 The Figure below shows the location of Hill Rise Woodstock in the context of the VISSIM model.

Figure 10: Hill Rise Woodstock Site Location

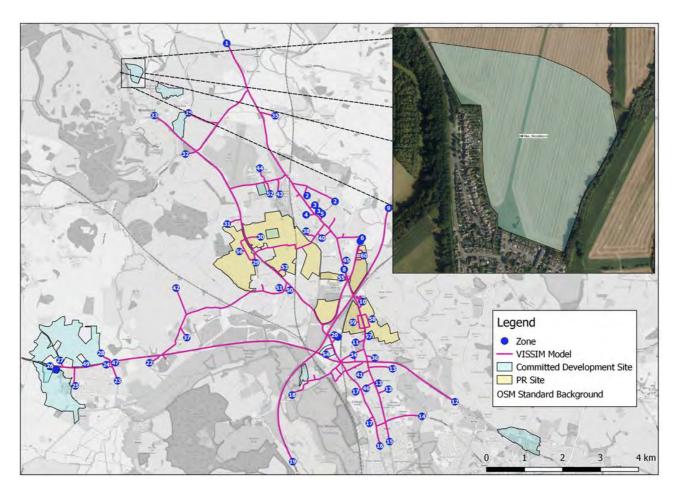

¹⁴ 21_00189_FUL-TRANSPORT_ASSESSMENT-921976, Table 9

3.52 Tables showing the in/out trip generation totals for Hill Rise Woodstock for each hour during the AM and PM peaks are provided below.

Table 16: AM In/Out Totals for Hill Rise, Woodstock

	07:00-08:00		08:00-09:00		09:00-10:00	
	In	Out	In	Out	In	Out
Hill Rise, Woodstock	10	27	18	41	18	14

Table 17: PM In/Out Totals for Hill Rise, Woodstock

	15:00-16:00		16:00-17:00		17:00-18:00	
	In	Out	In	Out	In	Out
Hill Rise, Woodstock	34	23	34	23	38	23

Banbury Road, Woodstock (Policy EW5) (21/00217/OUT)

- 3.53 Banbury Road is a committed development site located north of Banbury Road in Woodstock. The site proposes up to 250 dwellings and associated community space.
- 3.54 Similarly to Land East of Woodstock, the Site is served via two accesses; one via A44 Oxford Road and the other via Shipton Road and therefore two existing zones (zone 33 and 39) are assumed to be the development zones.
- 3.55 Trip generation for the peak hours is taken directly from the TA¹⁵. Trip generation for the shoulder hours is calculated from the TRICS Residential Total Person temporal profile, as provided in Table 1.
- 3.56 Local distribution is also taken from the TA¹⁶. Wider distribution beyond the local junctions is also defined within the TA¹⁷, where percentages are assigned to links across Oxford and these locations are assigned a corresponding VISSIM zone.

23

¹⁵ 21_00217_OUT-TRANSPORT_ASSESSMENT-921845, Table 9

¹⁶ 21_00217_OUT-TRANSPORT_ASSESSMENT-921845, Appendix F

¹⁷ 21_00217_OUT-TRANSPORT_ASSESSMENT-921845, Table 11

3.57 The Figure below provides the location of the Banbury Road site within the wider VISSIM model network.

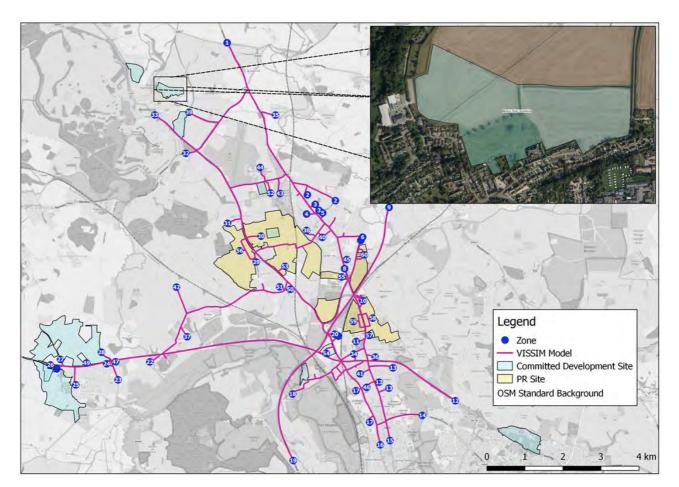


Figure 11: Banbury Road Woodstock Site Location

3.58 Tables showing the in/out trip generation totals for Banbury Road-Woodstock for each hour during the AM and PM peaks are provided below.

Table 18: AM In/Out Totals for Banbury Road, Woodstock

		07:00-08:00		08:00-09:00		09:00-10:00	
		In	Out	In	Out	In	Out
B	anbury Road, Woodstock	20	53	37	82	32	39

Table 19: PM In/Out Totals for Banbury Road, Woodstock

	15:00-16:00		16:00-17:00		17:00-18:00	
	In	Out	In	Out	In	Out
Banbury Road, Woodstock	68	46	68	45	74	47

Oxford North (CS6) (18/02065/OUTFUL)

- 3.59 Oxford North is a proposed mixed use development site located north-west of Wolvercote roundabout. Proposals include 87,300m² of B1 employment, up to 480 dwellings, a hotel and up to 2,500m² of local retail uses.
- 3.60 The site is served via an internal link that is connected at either end by two signalised junctions; one on the north side with A44 Woodstock Road and the other one on the south side with A40 Northern Bypass Road. This Site is partially included within the 2023 network that is used for the basis of this testing, but only Phase 1 of the development demands and site access arrangement/mitigation that accompany Phase 1 is applied. For the purposes of developing a 2031 model the full demands and network upgrades have been included, which includes enhancements at Peartree Roundabout and along the A44 corridor to Wolvercote Roundabout. The drawings used to upgrade the VISSIM modelling to the forecast 2031 position are provided in Appendix A.
- 3.61 Regarding the demands, trip rates are taken directly from the TA¹⁸. These are then disaggregated into hourly rates and multiplied by the B1, Residential and Hotel land uses individually, before combining into hourly trip generation values. Distribution is informed by the existing distribution within the 2023 model.
- 3.62 Zone 107 in the 2023 model represents the Oxford North Site and this remains the development zone in the 2031 model; note however that zone numbers have been rationalised during the 2031 model build and therefore the zone number becomes Zone 54.

¹⁸ 18_02065_OUTFUL-TRANSPORT_ASSESSMENT__PART_2__-180731_TA_001-2020183, Table 4.2

3.63 The Figure showing the site access arrangements of Oxford North (CS6) is provided below.



Figure 12: Oxford North Site Access Arrangements

- 3.64 Although Oxford North includes proposals for land parcels on the eastern side of A44 and southern side of A40, all development demands for simplicity are assumed to travel via the plot of land served by the connector link above.
- 3.65 The signalised junctions on A44 and A40 corridor are however included, thereby mimicking the effects of demands travel to/from these land parcels.

3.67 A Figure showing the location of the Oxford North within the wider model network is provided below.

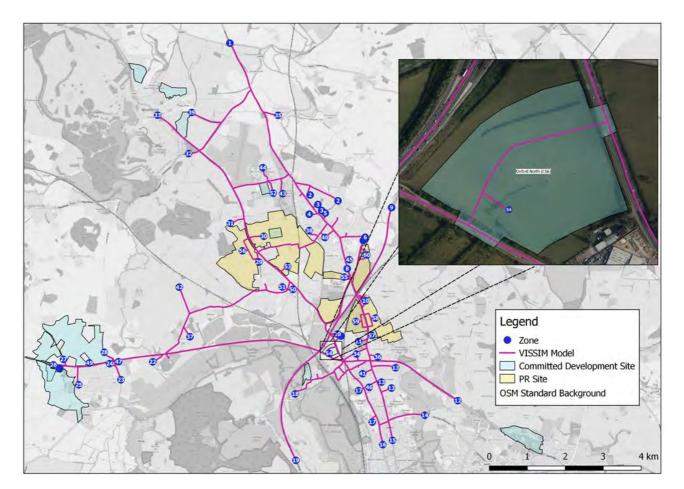


Figure 13: Oxford North Site Location

3.68 Tables showing the in/out trip generation totals for Oxford North for each hour during the AM and PM peaks are given below.

Table 20: AM In/Out Totals for Oxford North

	07:00-08:00		08:00-09:00		09:00-10:00	
	In	Out	In	Out	In	Out
Oxford North	533	181	909	260	597	193

Table 21: PM In/Out Totals for Oxford North

	15:00-16:00		16:00-17:00		17:00-18:00	
	In	Out	In	Out	In	Out
Oxford North	205	374	245	786	210	817

27

Land East of Park View (22/01715/OUT)

- 3.69 Blenheim Estates Homes is currently seeking planning consent for the development of 500 residential dwellings on land adjacent to the Park View development. It is not committed development but has been requested to be included in the Future Year Reference Case model by the local authorities, given it's proximity to the PR sites and proposed scale of development. The Site is served via an access onto A4095 Upper Campsfield Road which will link to the spine road provided by the adjacent Park View development. Land East of Park View development trips are assigned to zone 39.
- 3.70 A Figure showing the location of the Land East of Park View Woodstock within the context of the wider VISSIM model is provided below.



Figure 14: Land East of Park View Site Location

3.71 Tables showing the in/out trip generation totals for Oxford North for each hour during the AM and PM peaks are given below.

Table 22: AM In/Out Totals for Oxford North

	07:00-08:00		08:00-09:00		09:00-10:00	
	In	Out	In	Out	In	Out
Land East of Park View	44	123	81	187	79	66

Table 23: PM In/Out Totals for Oxford North

	15:00-16:00		16:00-17:00		17:00-18:00	
	In	Out	In	Out	In	Out
Land East of Park View	149	106	150	103	168	105

Begbroke Science Park (08/00803/OUT)

- 3.72 Begbroke Science Park is located approximately 5 miles north of Oxford City Centre and east of the A44. The site is connected to the A44 via a three-arm signalised junction with Begbroke Hill Road. The proposals are for an extension to the existing floorspace in the magnitude of an additional 12500sqm of B1 land use.
- 3.73 The Science Park is located within the boundaries of the PR8 Site but is included in the model via its own distinct zone. Specifically, existing zone 30 of the 2023 Reference Case model has been assigned as the Begbroke Science Park zone.
- 3.74 Trip generation for the peak hours are taken directly from the TA¹⁹. The TA only reports peak hour trip generation (08:00-09:00 and 17:00-18:00). Therefore, a TRICS B1b Total Person temporal profile is calculated to estimate the vehicle trips in the shoulder peaks. The TRICS rates used for this are as follows:

	Total Person Trip Rates		Proportions						
	In	Out	In	Out	In	Out			
AM Peak Period									
07:00-08:00	1.028	0.12	1.148	57%	52%	56%			
08:00-09:00	1.804	0.23	2.034	100%	100%	100%			
09:00-10:00	0.779	0.199	0.978	43%	87%	48%			
	F	PM Peak Per	iod						
15:00-16:00	0.176	0.551	0.727	114%	41%	48%			
16:00-17:00	0.195	0.97	1.165	127%	72%	77%			
17:00-18:00	0.154	1.35	1.504	100%	100%	100%			

Table 24: B1b TRICS Rates

3.75 Trip distribution is informed by the existing distribution assigned to zone 30.

¹⁹ Begbroke Science Park, Transport Assessment, May 2018, Figure 7 and Figure 8

3.76 A Figure showing the location of Begbroke Science Park in the context of the VISSIM model is provided below:



Figure 15: Begbroke Science Park Site Location

3.77 Tables showing the in/out trip generation totals for Begbroke Science Park for each hour during the AM and PM peaks are given below.

Table 25: AM In/Out Totals for Begbroke Science Park

	07:00-08:00		08:00-09:00		09:00-10:00	
	In	Out	In	Out	In	Out
Begbroke Science Park	45	5	79	10	34	9

Table 26: PM In/Out Totals for Begbroke Science Park

	15:00-16:00		16:00-17:00		17:00-18:00	
	In	Out	In	Out	In	Out
Begbroke Science Park	10	28	11	49	9	68

30

Oxford Technology Park

- 3.78 Oxford Technology Park is located 6 miles north of Oxford City Centre and just south of Oxford International Airport. The site lies adjacent to Technology Drive on the southern side of Langford Lane.
- 3.79 The proposals include 128,260sqft of B1a office, 47,960sqft of B1b research and development, and 237,050sqft of B8.
- 3.80 Development trips are assigned to existing zone 105 (which following rationalisation of the zone numbers through the 2031 model build becomes zone 52).
- 3.81 Trip generation for the peak hours are taken directly from the TA²⁰. The TA reports Office TRICS rates for all required periods, but only reports peak hour trip rates (08:00-09:00 and 17:00-18:00) for B1b and B8 land uses. Therefore a TRICS B1b Total Person temporal profile is calculated as provided in Table 22 to estimate the B1b vehicle trips in the shoulder peaks, and a TRICS B8 Total Person temporal profile is calculated to estimate the B8 trips as per the table below:

	Total	Person Trip	Rates	Proportions						
	In	Out	In	Out	In	Out				
AM Peak Period										
07:00-08:00	0.18	0.094	0.274	118%	85%	104%				
08:00-09:00	0.152	0.111	0.263	100%	100%	100%				
09:00-10:00	0.116	0.077	0.193	76%	69%	73%				
	F	PM Peak Per	iod							
15:00-16:00	0.097	0.115	0.212	103%	66%	79%				
16:00-17:00	0.085	0.152	0.237	90%	87%	88%				
17:00-18:00	0.094	0.175	0.269	100%	100%	100%				

Table 27: B8 TRICS Rates

3.82 Trip distribution is informed by the existing distribution assigned to zone 44, which is the parcel of land on the northern side of Langford Lane. The reason this zone was chosen over the existing zone to which the development has been applied is that the land use on the northern land parcel shares more in common with the Technology Park proposals. Zone 44 represents airport support services and offices, whereas zone 52 represents a series of car dealerships.

31

²⁰ Oxford Technology Park Transport Assessment

3.83 A Figure showing the location of Oxford Technology Park in the context of the wider VISSIM network is provided below:

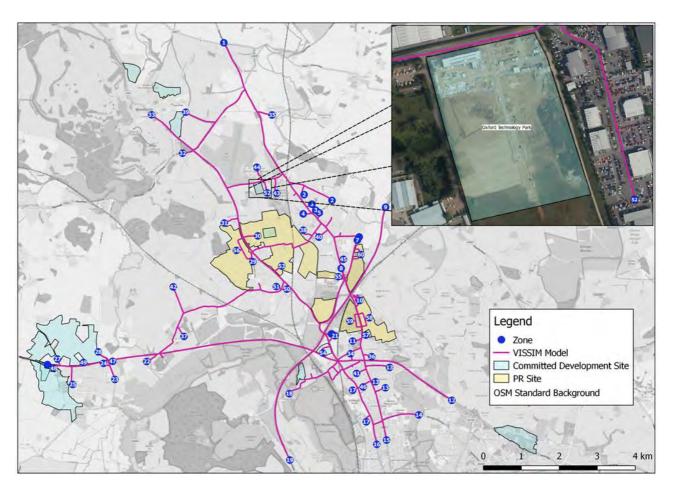


Figure 16: Oxford Technology Park Site Location

3.84 Tables showing the in/out trip generation totals for Oxford Technology Park for each hour during the AM and PM peaks are given below.

Table 28: AM In/Out Totals for Oxford Technology Park

	07:00-08:00		08:00	-09:00	09:00-10:00	
	In	Out	In	Out	In	Out
Oxford Technology Park	154	35	283	40	188	48

Table 29: PM In/Out Totals for Oxford Technology Park

	15:00	-16:00	16:00·	-17:00	17:00-18:00	
	In	Out	In	Out	In	Out
Oxford Technology Park	54	98	39	201	28	268


4 Model Updates || PR Sites

- 4.1 The specific purpose of this modelling exercise is to determine the capacity constraints on the network following inclusion of a series of PR sites around North Oxfordshire. These sites are:
 - i) PR6a (Land East of Oxford Road)
 - ii) PR6b (Land West of Oxford Road)
 - iii) PR7a (Land South East of Kidlington)
 - iv) PR8 (Land East of the A44)
 - v) PR9 (Land West of Yarnton)
- 4.2 VM continues to work alongside the consultants working on behalf of these sites to firstly use the VISSIM model tool to establish how the cumulative delivery of these sites impacts the network, and secondly to identify any mitigation strategies that may assist in allowing the network to accommodate the trips generated by the sites.
- 4.3 Each consultant has provided VM with a series of demand and distribution assumptions pertaining to their site, along with the access arrangements that are currently proposed to serve it.
- 4.4 This Chapter will discuss how the demand assumptions have been converted into matrices for entry into VISSIM, and the associated updates to the VISSIM model required for Site Access arrangements.

PR6a and PR6b (Land East and Land West of Oxford Road)

- 4.5 PR6a (Land East of Oxford Road) is a 48 hectare site located on the eastern side of A4165 Oxford Road. The site is proposed to allow for up to 820 dwellings along with associated infrastructure and supporting facilities. The transport consultant for the site is i-Transport.
- 4.6 PR6b (Lane West of Oxford Road) is a 32 hectare site located on the western side of A4165 Oxford Road. The site is allocated within the Local Plan for 670 dwellings along with associate infrastructure and supporting facilities. The transport consultant for the site is KMC Transport Planning. A planning application is yet to come forward for PR6b and therefore the allocated number of dwellings has been tested within the modelling at this stage.
- 4.7 The Figure below shows the location of the PR6a and PR6b sites in the context of the wider VISSIM model:


Figure 17: PR6a and PR6b Site Location

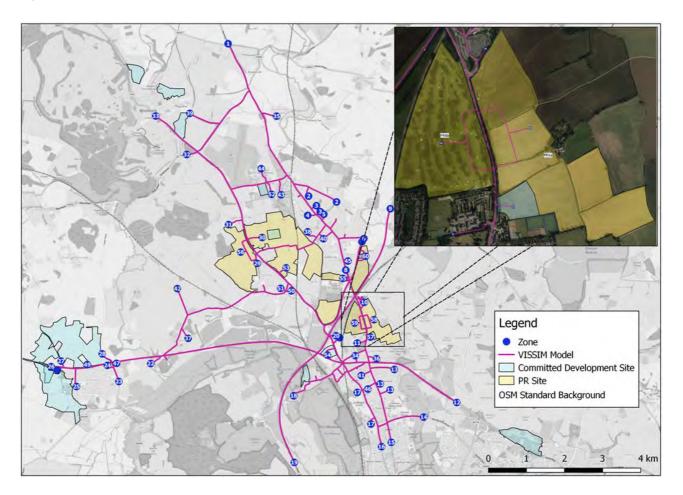

- 4.8 Together the respective consultants have compiled trip rates for their site. The trip rates are then converted to peak hour trip generation to apply to the VISSIM model hours, along with distribution assumptions to feed into the matrix development process.
- 4.9 Both sites are served by two site access arrangements; one south and one north. Drawings of the site access arrangements have been provided by i-Transport. The southern accesses, located 70 meters north of the current Water Eaton Estate Road, comprises of a new four-arm signalised junction serving Oxford Road (north-south), access to PR6b (west) and access to PR6a (east).
- 4.10 The northern accesses are formed of two priority junctions, one serving each PR site on either side of carriageway. The eastern access for PR6a is a left-in-left-out arrangement while the western access for PR6b is all movements.
- 4.11 This has been represented in the VISSIM model by a single zone for each site; zone 58 for PR6a and zone 59 for PR6b respectively. Each of the site access points onto the A4165 are connected by an indicative internal connector road with the zone sitting off that connector.

4.12 The Figure below provides the site access arrangements for the PR6 sites.

Figure 18: PR6a and PR6b Access Arrangements

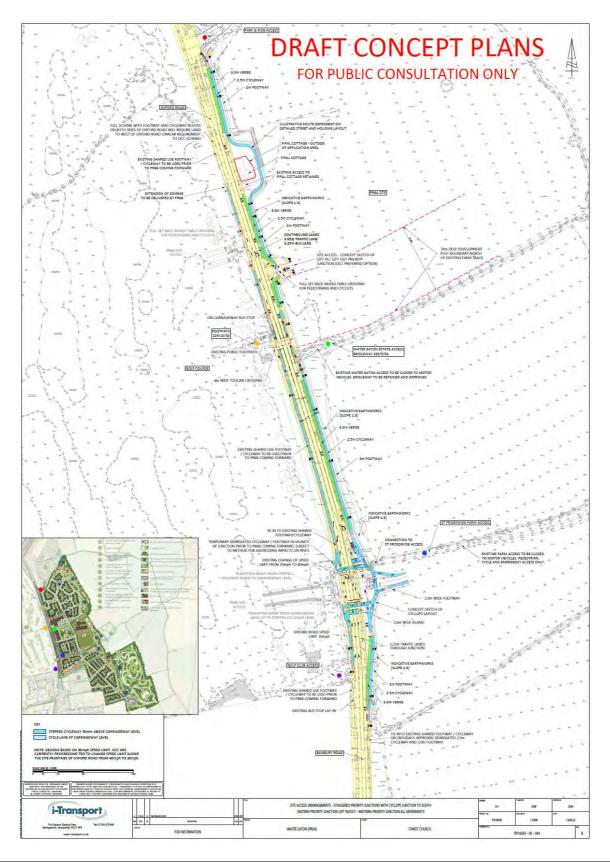

4.13 Tables showing the in/out trip generation totals for PR6a and PR6b Sites for each hour during the AM and PM peaks are provided below.

Table 30: AM In/Out Totals for PR6a Site

	07:00-08:00		08:00-09:00		09:00-10:00	
	In	Out	In	Out	In	Out
PR6a Site (Land East of Oxford Rd)	38	122	54	129	34	57

Table 31: PM In/Out Totals for PR6a Site

	15:00-16:00		16:00-17:00		17:00-18:00	
	In	Out	In	Out	In	Out
PR6a Site (Land East of Oxford Rd)	113	69	116	74	145	68

Table 32: AM In/Out Totals for PR6b Site

	07:00-08:00		08:00-09:00		09:00-10:00	
	In	Out	In	Out	In	Out
PR6b Site (Land West of Oxford Rd)	18	100	26	101	27	43

Table 33: PM In/Out Totals for PR6b Site

	15:00-16:00		16:00-17:00		17:00-18:00	
	In	Out	In	Out	In	Out
PR6b Site (Land West of Oxford Rd)	87	51	96	49	120	50

PR7a (Land South East of Kidlington)

- 4.14 PR7a (Land South East of Kidlington) is located South-east of the Kidlington Roundabout and includes proposals for approximately 430 dwellings. An illustrative masterplan document was used to inform the site access arrangements, which form two priority junctions located along Bicester Road.
- 4.15 For inclusion in VISSIM these accesses are connected by an internal connector road with a new zone assigned halfway along (Zone 60).

4.16 A Figure showing the location of the PR7a Site within the context of the wider VISSIM model is provided below:

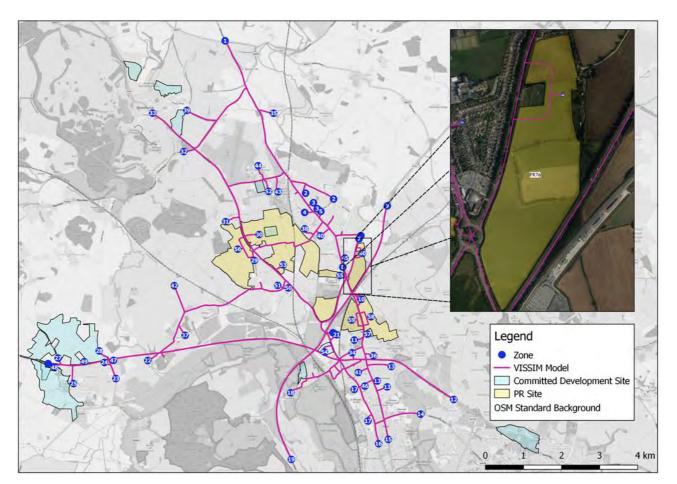


Figure 19: PR7a Site Location

- 4.17 Trip generation for the PR7a site assumes the same trip rates as those used for PR6. Local Distribution is taken from the PR7b Transport Assessment (to be discussed in the following section). As PR7a and PR7b are located adjacent to each other, distributions are assumed to be the same.
- 4.18 Tables showing the in/out trip generation totals for PR7a Site for each hour during the AM and PM peaks are given below.

Table 34: AM In/Out Totals for PR7a Site

	07:00-08:00		08:00	-09:00	09:00-10:00	
	In	Out	In	Out	In	Out
PR7a Site (Land SE of Kidlington)	12	66	18	69	19	29

Table 35: PM In/Out Totals for PR7a Site

	15:00-16:00		16:00-17:00		17:00-18:00	
	In	Out	In	Out	In	Out
PR7a Site (Land SE of Kidlington)	57	33	62	32	78	33

PR8 Site (Land East of the A44)

- 4.19 PR8 (Land East of the A44) is a 190 hectare site located to the east of A44. The transport consultants for the site are KMC Transport Planning for land within PR8 owned by Oxford University Development (OUD) and Glanville Consultants for land within PR8 owned by Hallam Land. OUD is to submit an outline planning application for up to 215,000 sqm of residential floorspace (which has been equated to 1,800 homes for the purposes of this assessment), up to 155,000 sqm of flexible employment uses and supporting social, retail, leisure and community uses, including two primary schools, a secondary school and local centre. Hallam Land is to submit an outline planning application for 300 residential dwellings.
- 4.20 The northern site access is proposed to be accessed via the existing access to the Science Park (represented in the VISSIM model by zone 30) and is proposed to have a fourth arm and improved pedestrian and cycle crossing facilities provided by PR9 in order to provide access to the allocated site.
- 4.21 Site access arrangement for the PR8 southern access has been provided by Glanville Consultants, which proposes a threearm signalised junction serving the A44 (North-south) and access to the site. The signalised junction is located on the northern side of the A44 carriageway approximately 60 meters south of the Shell Petrol Filling Station.
- 4.22 The 2023 model already contained a zone for PR8 and therefore no additional zone has been provided; calculated demands for PR8 replace the assumptions for PR8 that were entered into the 2023 forecast model.
- 4.23 A Figure showing the location of the PR8 Site within the context of the wider VISSIM model is provided below:

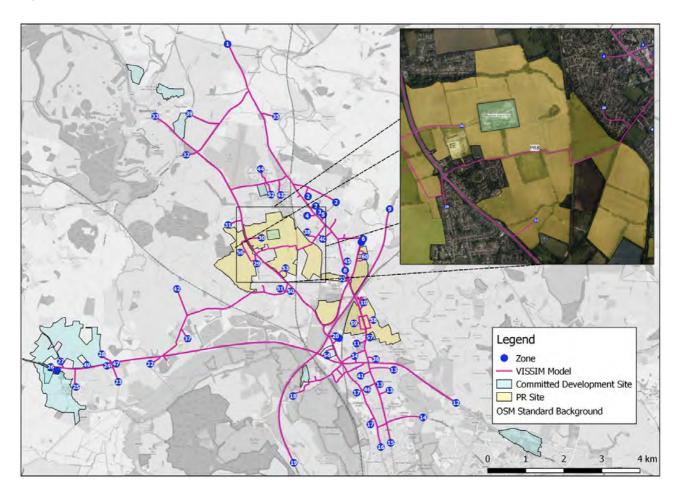


Figure 20: PR8 Site Location

39

4.24 A Figure showing the southern site access arrangement for PR8 is provided below.

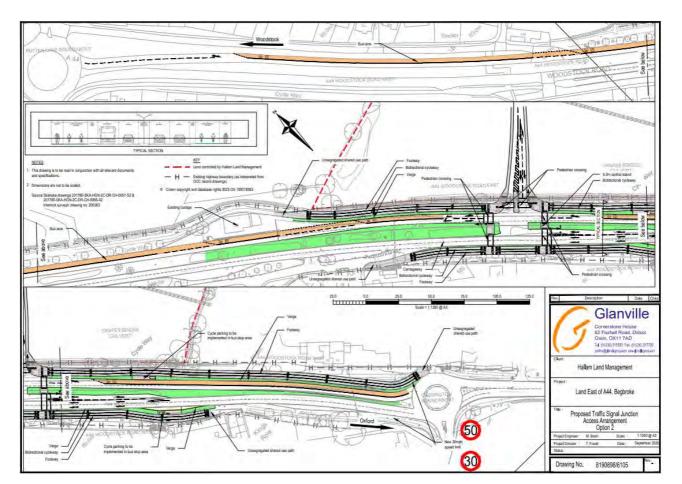


Figure 21: PR8 Southern Site Access Arrangement

- 4.25 The proposals above are for the purposes of the VISSIM modelling only and do not represent a commitment to deliver all works shown. PR8 is aware of OCC aspirations to include a bus lane along the A44 southbound between the Rutten Lane roundabout and Cassington Roundabout and the above access therefore ties in with those plans.
- 4.26 PR8 Site trip generation and distribution assumptions were provided by KMC Transport Planning, and these were converted into a demand matrix by apportioning MSOA areas to the nearest VISSIM zones.

4.27 Tables showing the in/out trip generation totals for PR8 Site for each hour during the AM and PM peaks are provided below.

Table 36: AM In/Out Totals for PR8 Site

	07:00-08:00		08:00	-09:00	09:00-10:00	
	In	Out	In	Out	In	Out
PR8 Site (Land East of the A44)	771	282	735	269	644	236

Table 37: PM In/Out Totals for PR8 Site


	15:00-16:00		16:00	-17:00	17:00-18:00	
	In	Out	In	Out	In	Out
PR8 Site (Land East of the A44)	295	603	309	632	288	589

PR9 Site (Land West of Yarnton)

- 4.28 PR9 (Land West of Yarnton) is a 99 hectare site located to the east of A44. The site is proposed to allow for up to 540 dwellings along with associate infrastructure and supporting facilities. The transport consultant for the site is Vectos.
- 4.29 Site access arrangement for the PR9 Site have been provided by Vectos, which proposes two access points onto A44. The Northern access involves the addition of a fourth arm onto the existing 3-arm signalised junction serving A44 and Begbroke Hill to allow access into PR8 on the southern side of the carriageway. The Southern access is located off Rutten Lane, adjacent to Yarnton Medical Practice.
- 4.30 An indicative internal connector link has been included to connect the two access points with a new zone (zone 56) positioned halfway along to represent the development site.


4.31 A Figure showing the location of the PR9 Site along within the context of the wider VISSIM model is provided below:

Figure 22: PR9 Site Location

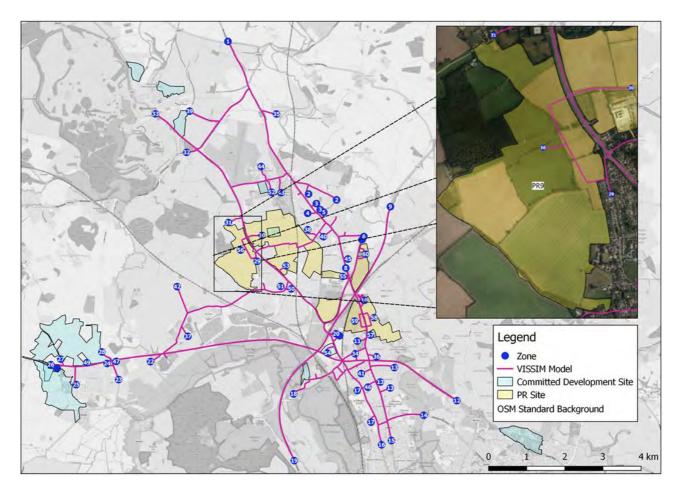

4.32 Figures showing the site access arrangements for the PR9 Site are provided below.

Figure 23: PR9 Site Access Arrangement (North)

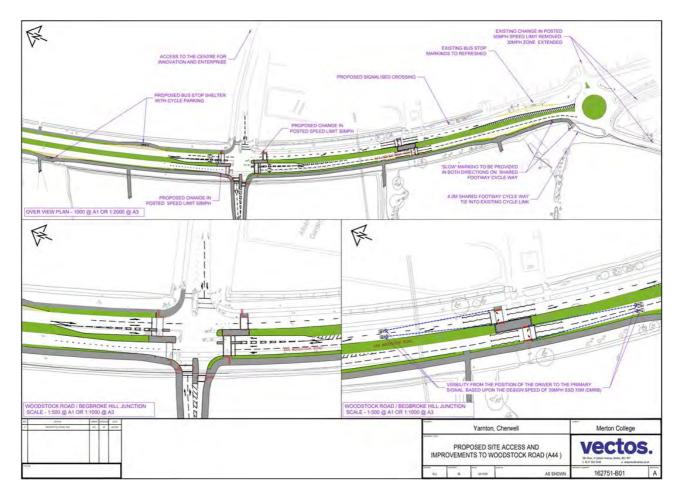

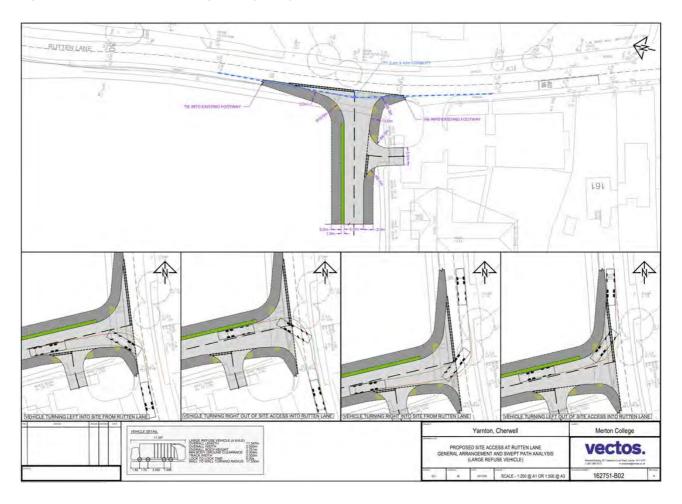


Figure 24: PR9 Site Access Arrangement (South)

- 4.33 Trip generation and localised distribution data for the site was provided by Vectos. In/out totals were provided and applied to two-way MSOA distribution assumptions which were in turn assigned to appropriate VISSIM zones to inform the matrix development process.
- 4.34 Tables showing the in/out trip generation totals for PR9 Site for each hour during the AM and PM peaks are provided below.

Table 38: AM In/Out Totals for PR9 Site

	07:00-08:00		08:00	-09:00	09:00-10:00	
	In	Out	In	Out	In	Out
PR9 Site (Land West of Yarnton)	26	89	28	84	42	49

Table 39: PM In/Out Totals for PR9 Site


	15:00-16:00		16:00	-17:00	17:00-18:00	
	In	Out	In	Out	In	Out
PR9 Site (Land West of Yarnton)	59	42	87	52	105	51

Other PR Sites

PR7b (Land at Stratfield Farm)

- 4.35 PR7b (Land at Stratfield Farm) is located off Oxford Road and includes proposals for approximately 120 dwellings and a care home. The site access arrangement involves a priority junction off Oxford Road just north of Kidlington Roundabout. A new zone (Zone 55) has been included to represent PR7b.
- 4.36 Trip generation for the PR7a site assumes the same trip rates as those used for PR6. Distribution has been taken from the Transport Assessment²¹, produced by MAC Ltd in February 2019.
- 4.37 A Figure showing the location of the PR7b Site within the context of the wider VISSIM model is provided below:

Figure 25: PR7b Site Location

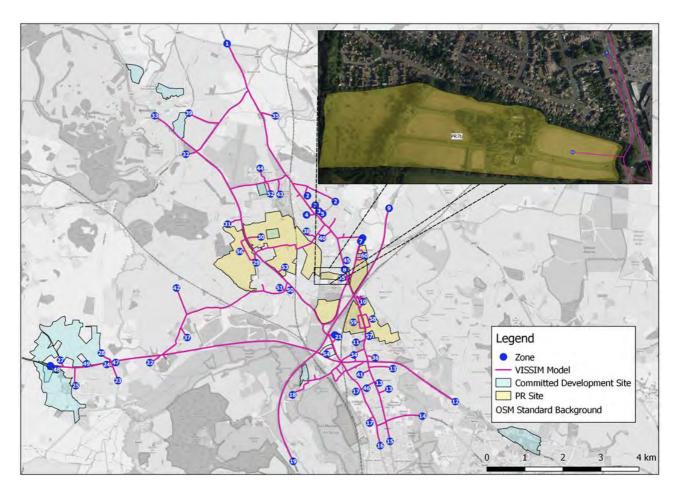

²¹ Proposed Residential Development, Land off Oxford Road, Report Reference 122-TS-01-B, Appendix L

4.38 Images showing site access arrangement of PR7b Site is given below.



Figure 26: PR7b Site Access Arrangement

4.39 Tables showing the in/out trip generation totals for PR7b Site for each hour during the AM and PM peaks are given below.

Table 40: AM In/Out Totals for PR7b Site

	07:00-08:00		08:00-09:00		09:00-10:00	
	In	Out	In	Out	In	Out
PR7b Site (Land at Stratfield Farm)	6	21	9	24	13	18

Table 41: PM In/Out Totals for PR7b Site

	15:00-16:00		16:00-17:00		17:00-18:00	
	In	Out	In	Out	In	Out
PR7b Site (Land at Stratfield Farm)	24	16	28	17	28	17

5 VISSIM Demand Summary

5.1 The Table below presents a summary of the peak hour input demands for the 2031 model.

Table 42: 2031 VISSIM Model Demand Summary

D : //	АМ			РМ			
Description	07:00 – 08:00	08:00 - 09:00	09:00 – 10:00	15:00 – 16:00	16:00 – 17:00	17:00 – 18:00	
Eynsham Garden Village	307	520	373	572	564	597	
West Eynsham (SDA)	71	114	63	139	138	150	
West Thornbury Rd	0	0	0	0	0	0	
Eynsham Nursery	8	13	7	16	15	17	
Land East of Woodstock	89	130	88	98	121	145	
Barton Park	28	46	27	72	71	77	
Wolvercote Papermill Site	52	75	42	52	52	65	
St. Frideswide Farm	41	65	32	50	50	54	
Hill Rise, Woodstock	37	59	32	57	56	61	
Banbury Road, Woodstock	73	119	71	114	113	121	
Oxford North (CS6)	714	1169	790	579	1031	1028	
Land East of Park View	167	268	145	255	253	273	
Begbroke Science Park	50	89	43	38	60	77	
Oxford Technology Park	189	323	236	152	240	296	
PR6a	160	183	91	182	190	213	
PR6b	119	126	70	138	145	170	
PR7a	78	87	48	90	94	110	
PR7b	27	33	31	40	45	45	
PR8	1054	1004	880	898	940	877	
PR9	114	112	91	101	139	156	
Committed Development Total	1826	2990	1949	2191	2765	2960	
PR Site Total	1552	1545	1211	1449	1553	1571	

Assigned Zones

5.2 Most of the proposed Committed Developments and PR Sites are located in areas which do not correspond to any of the existing zones of the base 2023 model. Therefore, new zones have been considered. Table below presents a summary of zones that have been assigned to each of the committed developments and PR Sites.

Zone (1/2)	Site	Zone (2/2)	Site
12	Barton Park	39	Land East of Woodstock
14	Barton Park	39	Banbury Road, Woodstock
18	Wolvercote Papermill Site	52	Oxford Technology Park
26	Eynsham Garden Village	53	PR8 – Land East of the A44
26	West Eynsham (SDA)	54	Oxford North (CS6)
26	West Thornbury Rd Eynsham	55	PR7b – Land at Stratfield Farm
26	Eynsham Nursery and Plant Centre	56	PR9 – Land West of Yarnton
30	Begbroke Science Park	57	St. Frideswide Farm (SP24)
33	Land East of Woodstock	58	PR6a – Land East of Oxford Road
33	Hill Rise, Woodstock	59	PR6b – Land West of Oxford Road
33	Banbury Road, Woodstock	60	PR7a – Land Southeast of Kidlington Road
39	Land East of Park View		

Table 43: 2031 Com Dev and PR Site Zone Assignment

6 Summary & Conclusion

- 6.1 Vectos Microsim (VM) has been commissioned by a multi-consultancy group working on behalf of a number of Partial Review (PR) Sites that are allocated within the Cherwell District Council Local Plan.
- 6.2 VM is providing VISSIM microsimulation modelling support to all sites with a view to assisting in developing a suitable mitigation strategy for all Sites to come forward within the Local Plan period, working together with the Local Authority to agree an approach for the delivery of any infrastructure requirements and how these may be phased and financed.
- 6.3 This Note sets out the forecasting methodology adopted to include all committed developments, as well as the demands totals and site access arrangements assumed for the PR Sites.

Appendix A

Oxford North Scheme Drawings

Contact

London

Network Building, 97 Tottenham Court Road, London W1T 4TP. Tel: 020 7580 7373

Bristol

5th Floor, 4 Colston Avenue, Bristol BS1 4ST Tel: 0117 203 5240 www.vectos.co.uk

Cardiff

Helmont House, Churchill Way, Cardiff CF10 2HE Tel: 029 2072 0860

Exeter

6 Victory House, Dean Clarke Gardens, Exeter EX2 4AA Tel: 01392 422 315

Birmingham

36 Great Charles Street, Birmingham B3 3JY Tel: 0121 2895 624

Manchester

Oxford Place, 61 Oxford Street, Manchester M1 6EQ. Tel: 0161 228 1008

Leeds

7 Park Row, Leeds LS1 5HD Tel: 0113 512 0293

Bonn

Stockenstrasse 5, 53113, Bonn, Germany Tel: +49 176 8609 1360 www.vectos.eu

Registered Office Vectos Microsim Limited Network Building 97 Tottenham Court Road London W1T 4TP Company no. 9322829

Appendix B



Oxford PR Sites VISSIM Assessment Forecast Capping Discussion Note

VM210467.DN02b May 2023

Introduction

- 1. Vectos Microsim (VM) is assisting in the assessment of the impacts of delivering the allocated sites to the North of Oxford city, on the transport network, using the Oxford North VISSIM model.
- 2. The work is being undertaken on behalf of multiple site promotors and is assessing the effects of the allocated sites references PR6(a&b), PR7(a&b), PR8 and PR9.
- 3. The cumulative effect of delivering these sites is being considered alongside a series of key consented developments which have been identified for inclusion within the assessment through a separate scoping exercise conducted with Oxfordshire County Council (OCC).
- 4. The primary objective of this study is to identify the effects on network operation arising from traffic forecasts associated with the allocated and consented developments, inclusive of any consented infrastructure proposals. This will then be used to determine the appropriate extent and location of mitigation and/or sustainable transport measures that will need to be achieved to enable the allocation strategy to be delivered in a sustainable manner which is acceptable to OCC.
- 5. The VISSIM microsimulation model network extent, as well as the key development locations, is illustrated within **Figure 1** overleaf.

Purpose of this Note

6. The purpose of this Note is to set out the assumptions applied to the demands within the VISSIM model to enable future changes in trip movements associated with the delivery of consented developments to be reflected within the VISSIM model in a realistic manner.



Background

- 7. The North Oxford VISSIM model has been provided to VM by OCC and has been adjusted to account for the traffic growth projected to occur through the delivery of an agreed set of committed developments and the allocated developments.
- 8. The assumptions contained within these model scenarios have been circulated and reported separately and have resulted in the development of a Future Year Reference Case model which contains all development proposals and associated infrastructure. The Local Plan Part 1 Partial Review runs to 2031. The PR sites are expected to be constructed and completed during this period up to 2031, albeit PR8 is expected to be completed shortly after by 2033. Therefore, the Future Reference Case model will establish local highway network conditions, taking into account any appropriate background traffic growth, consented development traffic and PR site traffic upon completion.

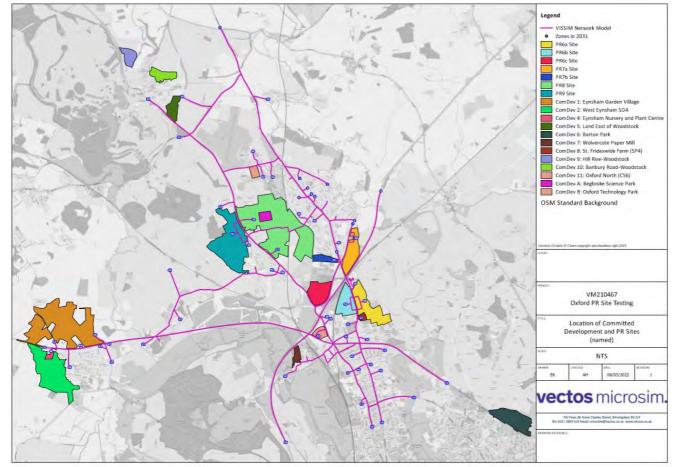


Figure 1: Model Extent and Development Locations

9. The Future Year model network, inclusive of the traffic projections, represents a situation where the network capacity has been exceeded. The network is not able to accommodate the projected traffic levels and so significant increases in congestion levels are observed. In all model runs under these



unadjusted demand conditions whereby the full quantum of committed development is included on top of the baseline, congestion reaches a critical point whereby the model is unable to function and locks up (due to, for example, vehicles conflicting with each other and the modelled environment being unable to 'unlock' these vehicles, leading to exponential increases in delay).

- 10. In this instance, a functioning network is one which is considered to demonstrate sensible patterns of flow build up and dissipation. Network failure is demonstrable by continued and exponential increases in traffic volumes (and delays), with no discharge patterns being discernible.
- 11. This is both unrealistic and implausible as, in reality, 'gridlock' is a modelling phenomenon which does not occur on the ground, as there are a very large number of driver responses which can occur (such as retiming, route switching, changing mode, not travelling at all) that are not accounted for within the algorithms of the modelling software, as well as the ability of drivers in reality to manoeuvre/interact/co-operate in ways that the simulation simply cannot replicate.
- 12. Whilst it is important to note the occurrence of such conditions, presenting results from models which are in effect 'gridlocked' undermines the credibility of any assessment. It should also be recognised that, in reality, drivers will make decisions to avoid the regular occurrence of such extreme situations, drivers will change mode, retime or even cease their trips in response to such adverse conditions.
- 13. Whilst an approach which accounts for all committed development demands as effectively 'new' trips will result in high traffic volumes being run through the model this is not necessarily the right approach. Partly this is because the model behaviour is manifestly unrealistic as a result and partly because it fails to recognise what is occurring on the road network.
- 14. In areas such as the road network around Oxford, traffic volumes are not necessarily increasing on an exponential basis as one would expect if traffic forecasts assumed all traffic associated with committed developments is 'new'.
- 15. In such instances it is appropriate to consider local traffic trends when deriving traffic forecasts to ensure that the outcome can be considered realistic and plausible.

Objective

- 16. The objective of this stage of the assessment is to establish the level of traffic growth to be assumed within the VISSIM modelling which reflects a realistic position based on interpretation of local evidence, and the need to ensure that the final model scenario is 'realistic' and can be used to reliably discern the effects of delivering both the allocated sites and the transport strategy required to support them.
- 17. A modelling assessment based on a network that does not function will only ever result in the prediction that significant additional road capacity will be required to support growth. This is even before the effects of traffic growth associated with any of the allocated sites is considered.



Forecast Adjustments

- 18. Having initially developed a model which is informed by a traffic forecasting exercise which assumed all trips are 'new' the outcome was a model network which does not function. Capacity has been significantly exceeded and the network operation, and resulting model outputs, cannot be considered either realistic or reliable.
- 19. The forecasts derived from the manual application of traffic growth, estimated to occur as a result of both the committed developments and the PR allocations, results in increases in traffic volumes over the baseline levels, of as much as 28%.
- 20. Given the fact that parts of the network are already close to capacity it is unrealistic to expect that the network will continue to be able to sustain such increases in traffic volumes. Furthermore, such growth would be contrary to Oxfordshire County Council's Cabinet adopted Local Transport and Connectivity Plan (LTCP) which, among its many ambitions, aims to cut car journeys by a quarter by 2030 and reduce them by a third by 2040.
- 21. Adjustments are therefore required to determine what an appropriate level of growth may be assumed within the modelling in light of the current circumstances, cognisant of historic trends and forthcoming policies.
- 22. The previous forecasts of up to 28% growth are contrary to forthcoming policies from OCC and also yield unrealistic outcomes when assigned to the existing traffic model. This is not unusual, particularly given the deterministic nature of microsimulation modelling software and the limitations that the software has in terms of considering wider driver responses but it does mean that adjustments to the demands will be essential to engender confidence in the modelling outcomes.
- 23. This note sets out a method for determining an appropriate adjustment to the model demands to constrain traffic forecasts to levels which are both realistic and conform to forthcoming policy objectives.
- 24. Two different sets of analysis have been completed. The first simply considers the linear interpolation of existing traffic trends, based on a series of observed traffic surveys collected over an extended period of time, to project forward what will happen to traffic flows by the end of the Local Plan period in 2031. A second method also considers the housing build out patterns within the area to link development delivery with traffic growth.
- 25. Each of these approaches and the resulting outcome is described further as follows:



Data Selection and Cleaning

- 26. The traffic data which has been used in the process has been provided by OCC and processed by Vectos to provide summary totals for each year that the traffic data has been collected for.
- 27. The site locations for which traffic data was provided are illustrated within the following **Figure 2**.

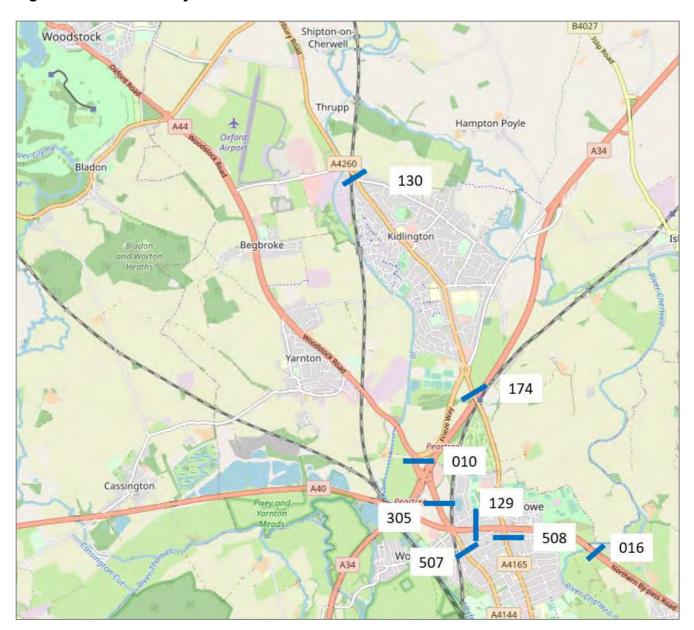


Figure 2: Traffic Survey Locations

28. Traffic data for the majority of these sites has been provided for a range of periods between 2000 and 2021 on the following basis. Note that sites 130 and 305 are not included within the analysis as 130 lies at the northern extremity of the model extent and contained a series of anomalies within the



yearly data, as well as the A4260 corridor that it monitors being covered by site 174 further south, and 305 is covered by adjacent count sites both north and south of this location.

29. Despite this these two sites have been analysed independently and results are provided within the graph below:

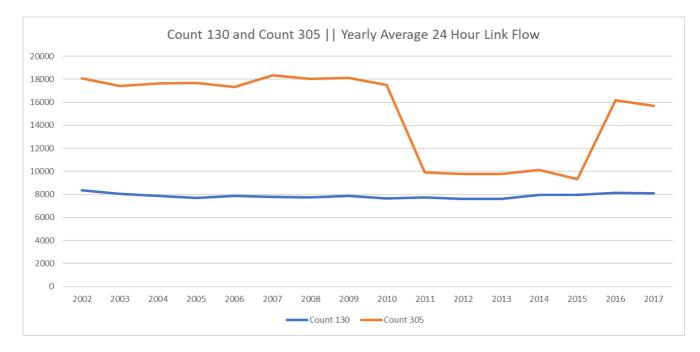


Figure 3: Count Sites 130 and 305 Traffic Flows

- 30. The graph above demonstrates that while Count Site 305 exhibits erroneous data between the years 2011 and 2015, the trend of traffic levels between 2002 and 2017 is a negative one. This is corroborated by Count Site 130 which shows consistent traffic levels between 2002 and 2017, but with overall growth also exhibiting a negative trend.
- 31. The process for analysing the remaining sites is detailed below.

Table 1: Traffic Survey Period

Count Point	From	То
010 A44 NORTH-WEST OF PEARTREE ROUNDABOUT	2000	2021
016 A40 OXFORD NORTHERN BYPASS	2002	2021
129 A40 SUNDERLAND AVENUE	2002	2021
174 A4165 South of Kidlington	2000	2021
507 A4144 Oxford, Woodstock Rd S of Blandford Ave	2000	2021
508 A4165 Oxford Banbury Rd South of A40	2000	2021



32. As a first stage, the traffic data for each site was revisited to ascertain whether it produced stable flow patterns over the relevant forecast period. Stacked analysis of each site was undertaken and is presented within the following Figure:

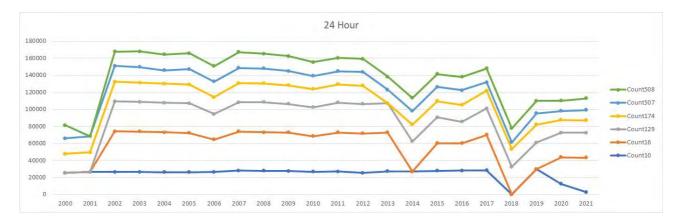


Figure 4: Stacked Count Data (24 Hours) 'Full Range'

- 33. The count sites show a clearly discernible drop in traffic volumes in 2018 with modest recovery thereafter. The data has been checked and is not erroneous and therefore it was considered that the best course of action was to omit traffic data processed for 2018 onwards. Adopting this data within the analysis would simply result in a significant reduction in traffic volumes to be assigned in the future year scenarios. Even if this does transpire, there is an expectation that OCC will expect to see some element of traffic flow increases because of the forecasting process and so, for this reason, the cut off was implemented from 2018 onwards.
- 34. Count site 16 and 174 were identified as having missing data sets within the assessment period (2013 and 2041 respectively) and so both of these sites were also omitted from the interpolation.
- 35. This resulted in the following traffic patterns being used to interpolate future growth levels based on existing traffic trends:



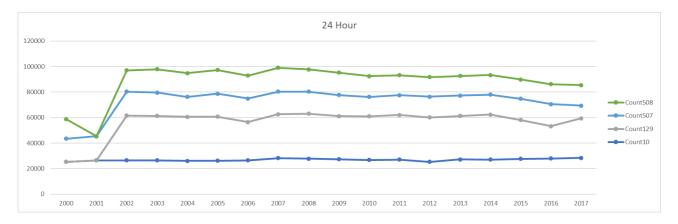


Figure 5: Stacked Count Data (24 Hours) 'Selected Range'

- 36. Interestingly, even when traffic data has been processed and cleaned, to minimise the rate at which it predicts a reduction in traffic levels, these sites, when assessed over the AM and PM peak hours, would still result in the prediction that future traffic levels will drop by 2031 relative to 2017 (the last year chosen for the analysis).
- 37. Between 2013 to 2017 there remains a notable drop in the traffic volumes observed at each location. The biggest drop occurs within 2014, followed by a slight recovery in traffic flows but which remains below 2013 levels. The rate at which the traffic volumes recover affects whether the linear interpolation of future trends predicts growth or recession in traffic volumes.
- 38. Because the recovery in the AM and PM peak hours is much slower than the 24 hour levels, this results in the peak hour analysis predicting a reduction in traffic flows of between 10-11.5%, whilst the 24 hour analysis predicts a more modest reduction in traffic volumes of around 8%.
- 39. The trend analysis for the AM and PM peak hours is presented separately to the 24 hour period within the following **Figure 6** and **Figure 7** respectively:




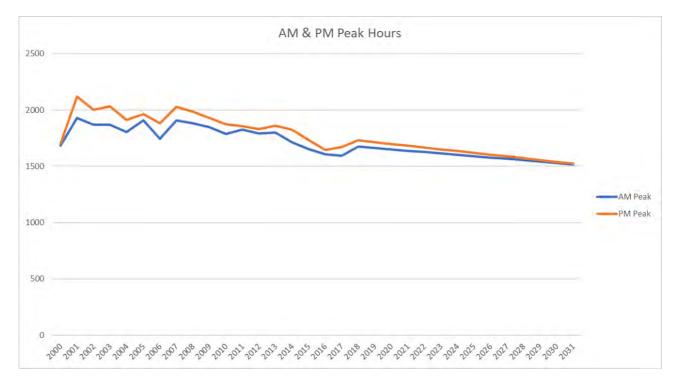


Figure 6: Traffic Trend Analysis and Interpolation (AM and PM Peak Hours)

Figure 7: Traffic Trend Analysis and Interpolation (Daily Volumes)



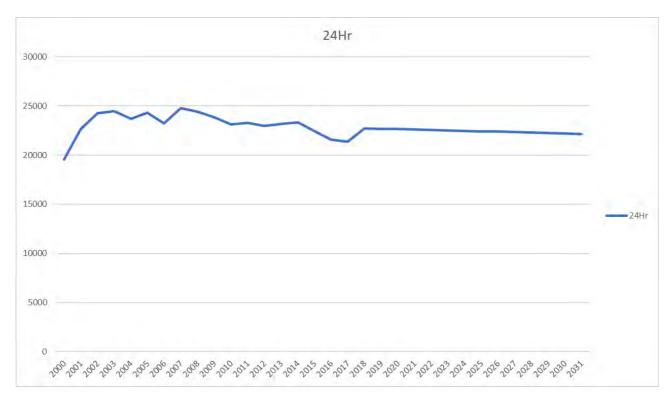

Development Trajectory Analysis

- 40. Consideration has been given to establish if there is a relationship between changes in traffic volumes and the delivery of new housing within the study area.
- 41. This was considered particularly pertinent since most of the traffic trend analysis resulted in the prediction that traffic volumes would be lower in 2031 than those observed in 2017/2018.
- 42. It is possible, for example, that one could contend that traffic growth rates have been constrained due to limited housing delivery and a correction to the rate of housing delivery would, correspondingly increase the rate of traffic growth to be assumed within the modelling.
- 43. However, the availability of planning data to inform the projections for housing delivery was limited. Vectos has previously provided census data pertaining to housing levels identified within census for the years 2001 and 2011, no data is available beyond this point within the current census data.
- 44. Within NTEM there is some account of increasing dwelling figures within the planning assumptions. NTEM figures begin at 2011 however and when comparing the 2011 figures within NTEM with those presented within the census data there is a clear discrepancy within the figures.
- 45. The differences between the two figures for 2011 are presented within **Table 2** alongside the adjustment factor. This adjustment factor was subsequently applied to the 2001 census data to create an equivalent NTEM housing figure for 2001. This then allows NTEM to be interrogated for a 2017/18 housing figure as well which, in turn, allows projected housing delivery to be plotted against the traffic trends to understand if there is a discernible relationship between the two data sets. The outcome of this process is presented within **Table 3** and presented alongside the processed traffic volumes within **Figure 8**.




Table 2: Nomis versus NTEM Housing Projections

	NOMIS		NOMIS NTEM		
Area	2001	2011	2011	Difference	
Cherwell	23,117	23,440	56,890	2.427048	
West Ox	32,051	32,620	43,512	1.333906	
Oxford	134,248	151,906	259,319	1.707102	
Total	189,416	207,966	359,721	1.729711	

Table 3: Normalised Housing Projections (2001 to 2018)

Area	2001 Adjusted	2011 NTEM	2018 NTEM
Cherwell	56,106	56,890	85,346
West Ox	42,753	43,512	47,200
Oxford	229,175	259,319	287,588
Total	327,635	359,721	420,134



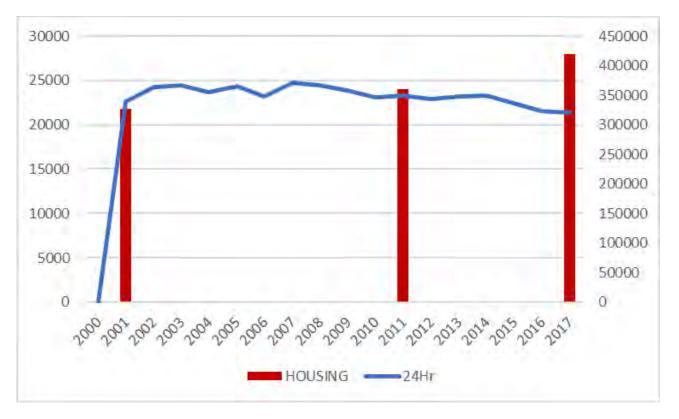

46. The previous figure reveals that the increase in housing projections actually corresponds to a modest reduction in traffic volumes. Whilst housing deliveries are increasing, traffic flows are reducing within the same period.



- 47. Although this has required a mix of NTEM estimates and observations through census, it clearly demonstrates that increased housing levels will not necessarily mean an increase in traffic volumes.
- 48. Therefore, in order to reflect this within the traffic modelling, it is proposed that the forecast scenario is derived whereby total growth within the model, following the assignment of the committed development demands, remains at 0%. The mechanics of the application of this methodology are described in the section below

Capping Application – A40 Adjustment

- 49. As a first step, it was considered necessary to apply demand adjustments in response to the inclusion of the A40 bus corridor scheme present within the 2031 VISSIM network. This scheme is to be delivered as part of the Growth Fund and was included within the 2023 VISSIM model received as the starting point for this assessment. However, in revising network demands back to 2018 baseline before reforecasting to include all committed sites (details of which can be found in the Forecasting Report¹), modelled demands prior to this adjustment do not account for any potential shift from car trips to bus trips following delivery of the A40 bus infrastructure.
- 50. To account for this element of forecast modal shift, a catchment area was determined along the A40 covering zones located along the A40 corridor to the west which may present opportunities for mode shift, along with zones towards the east that reflect either the continued A40 off-network, or zones located within central Oxford that will be serviced by A40 bus routes.
- 51. Two determining factors have been established that control whether a trip within the OD matrix is potentially subject to an adjustment:
 - a. Whether the zone lies within the bus corridor catchment
 - b. The nature of the zones which make up the trip (i.e. Internal, External Minor, or External Major)
- 52. The magnitude of trips which are able to shift is based on the type of OD, with trips that a predominantly internal in nature being considered more likely to shift than trips that are largely linked to wider destinations. The relative adjustment potential for each trip type is presented within the following matrix:

Table 4: Demand Adjustments for Linear Factors

From/To	External Major	External Minor	Internal
External Major	5.0%	7.5%	10.0%
External Minor	7.5%	5.0%	15.0%
Internal	10.0%	15.0%	25.0%

¹ VM210467.R001b Forecasting Report



53. The image below provides the catchment, along with the zones included as those which would benefit from improved bus services along the A40. A40 East and West zones are assumed to be External Major, zone 23 (which represents the B4449 south of A40, leading to Eynsham and connecting to A420 and A34 at Botley) is assumed to be classified as External Minor, while all other zones are assumed to be Internal.

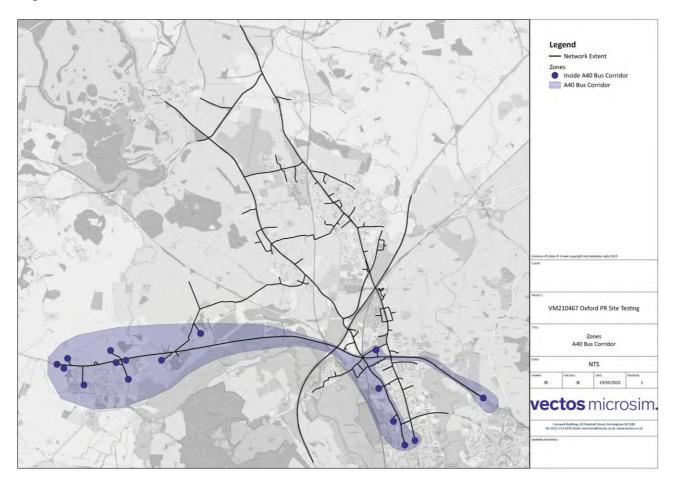


Figure 9: A40 Bus Corridor Catchment

Capping Application – Eynsham Park and Ride

- 54. In addition to the mode shift forecast to be achieved via the introduction of the A40 bus lane, the proposals to bring forward a Park and Ride service at Eynsham is also considered. As these proposals are to be funded by sources outside of the PR sites considered in this assessment, the adjustments are applied to the Reference Case model and carried through into the testing.
- 55. The methodology identifies zones located near to the proposed location of Eynsham Park and Ride, and pairs these origin zones with destination zones in and around Oxford City Centre. For the AM, this provides a total possible intercept of 634 trips, i.e. 634 trips are identified as travelling from the Eynsham origin zones to the Oxford destination zones. In the PM, a total intercept of 442 trips is



identified, corresponding to the number of trips identified in the matrix travelling from Oxford zones to Eynsham zones.

- 56. Forecast accumulation for the Park and Ride is taken from the TA², which suggests a total 3 hour occupancy rate of 90.2% and a PM occupancy rate of 62.3%. This translates to a total of 767 AM trips and 530 PM trips that would be forecast to use the P&R service, and thus the number of trips that would be removed from the A40 corridor. This means that the number of trips available to be shifted within the VISSIM demands is lower than the forecast utilisation of the Park and Ride in both peak periods.
- 57. Notwithstanding this, the available OD movements are removed from the VISSIM demands on the basis that these trips are likely to shift to the new Park and Ride Service.

Capping Application – Remaining Background Cap

- 58. Following inclusion of the focussed adjustment on the A40 resulting from the Growth Fund scheme and the Eynsham Park and Ride, further adjustments are applied in line with the analysis undertaken above to cap the overall network demands to a level consistent with the baseline, ensuring an overall 0% growth level can be maintained.
- 59. To ensure that the distribution of growth reflects known development pressures, as is identified through the analysis of the committed developments, the matrices which have been derived for the committed developments have been retained with the existing trip generation figures fixed for each of these developments. This means that traffic generation figures related to the committed developments, and their associated impact, can be accounted for within the model network but there is a corresponding reduction in baseline trip figures from those zones which are predicted to experience increases in traffic volumes related to the committed developments.
- 60. Effectively, the committed development demands displace trips within the existing background matrices such that traffic volumes within the future year reference case, prior to the allocated sites being included, remains consistent with the volumes observed within the 2018 base model.
- 61. This is considered to be the most realistic forecast scenario to enable OCC to understand the outcomes that may occur following the inclusion of the allocated sites and associated sustainable transport interventions.
- 62. The demands build for the committed developments has resulted in 6764 trips being identified for inclusion within the model network during the AM period and 7916 trips being assigned within the PM period. The baseline figures for the AM and PM periods are 46420 and 49916 respectively.
- 63. In order for traffic growth within the model to be capped at 0% it is necessary to reduce the total background traffic which is assigned to the model by the same magnitude as the total committed development trips being added.

² A40 Park and Ride and Bus Lane Scheme, Transport Assessment, Oxfordshire County Council, Table 6.2



- 64. The following steps have been adopted to achieve this level of adjustment within the model demands in a manner which also retains the assignment demands derived for the committed developments, as per the trip generation totals identified during the process of scoping out the future year model assumptions:
 - The level of traffic required, per hour, to limit growth to 0% was identified.
 - Correspondingly, the amount that traffic volumes needed to reduce by to enable 0% overall to be adopted within the model was identified on an hourly basis.
 - This 'reduction' was distributed using the pattern of growth identified as a result of the individual hourly committed development matrices.
 - The reduction, once distributed using the pattern of growth per the Com Dev matrices was then applied to the background matrix levels for each hour.
 - In certain instances the application of this reduction resulted in negative trips occurring (i.e. Origin/Destination pairs where the volume of trips within the background matrix was lower than the quantum being removed) in such instances, a furnessing procedure was applied on the following basis:
 - Initially, zones which had negatives within the destination column were furnessed such that the negatives were subtracted from the existing positive figures within the respective matrix column.
 - Subsequently, where negative figures still remained within the matrices, the process was repeated using origin figures whereby the negatives were applied proportionally to the remaining positive figures.
 - Finally, in the rare instances were after both column and row adjustment negatives still remained, an adjustment was made whereby the remaining negatives were reduced from the whole matrix proportionally based on the remining positive trip generation totals.
 - The resultant 'adjusted' background demand matrix levels were then assigned to the model alongside the full committed development matrices.
- 65. A summary of the outcome of this process is also provided within the following **Table 5** which sets out the adjustment which has been applied to the background matrix levels, and the resulting demand totals now assigned to the Reference Case as a result:



Table 5: Demand Adjustment Summary

	AM	AM	AM	PM	PM	PM
Period	07:00-	08:00-	09:00-	15:00-	16:00-	17:00-
	08:00	09:00	10:00	16:00	17:00	18:00
Background Lights	15668	16472	14280	15156	16900	17860
Com Dev	1826	2990	1949	2191	2765	2960
Initial Total	17494	19462	16229	17347	19665	20820
CD GROWTH	11.7%	18.2%	13.6%	14.5%	16.4%	16.6%
Periodic		14.6%		15.9%		
Target	0%		0%			
Diff		-14.6%			-15.9%	
figure		-5443			-6404	
Target adjustment	-1826	-2990	-1949	-2191	-2765	-2960
A40 Corridor Adjustment	-85	-76	-69	-67	-78	-53
Eynsham P&R Adjustment	-242	-161	-231	-88	-228	-127
Remaining Background Cap	-1499	-2753	-1649	-2037	-2460	-2780
Background Lights	13842	13482	12331	12965	14135	14900
Com Dev	1826	2990	1949	2191	2765	2960
Final Total	15668	16472	14280	15156	16900	17860

Summary

- 66. The modelling working group has developed a Future Year Reference Case VISSIM model which can be used to assess the implications of delivering the proposed PR allocations north of Oxford. As part of this process historic data provided by OCC has been reviewed for a number of sites within the area.
- 67. The traffic counts and survey periods have been rationalised to enable trend analysis to be completed. This has allowed traffic forecasts to be projected forward to Local Plan year of 2031 based on the trends observed within the historic traffic data collected at the selected locations.
- 68. This has also been compared with the planning assumptions contained within the NTEM database and the Census data to create a normalised housing delivery level for the years 2001, 2011 and 2018. This has been used to correspond the changes in traffic forecasts to housing delivery rates.
- 69. Analysis and interpolation of the trends observed within the traffic data reveals that traffic levels are predicted to drop within the AM and PM peak hours by 2031, relative to 2017 levels.
- 70. Comparison of the traffic trends relative to housing delivery reveals that the drop in traffic volumes is actually accompanied by an increase in housing provision and, as such, an adjustment has been defined whereby the traffic movements associated with the committed developments are contained



within the model traffic demands but trips associated with the same zones in the base model, as are affected by the committed development trip generation figures, are reduced. This is intended to ensure that the total demands within the model do not exceed the total of the trips contained within the base model.

- 71. This has resulted in adjustments to the traffic figures within the model to ensure that the overall traffic volumes within the model are capped at 0% above the baseline figures inclusive of the additional demands associated with the consented developments. The adjustments to the traffic forecasts have been applied to the background light vehicles; HGVs are fixed at the baseline levels.
- 72. It is considered that the application of capping in the manner set out within this note is sensible, as it allows for realistic forecasts to be derived for assignment within the model such that the network capacity is not entirely exceeded prior to any development assessment work, as clearly that would not be a realistic position particularly given the findings of the trend analysis which points to a steady decline in peak hour traffic volumes.
- 73. The resultant traffic figures assigned within the VISSIM model also accord with the reductions being targeted through Oxfordshire's LTCP. Continued application of increases in traffic volumes through the model forecasting would represent a significant failure in OCCs policy approach.

Appendix C



Oxford PR Sites VISSIM Assessment Mode Shift Assessment Discussion Note

VM210467.DN01b May 2023

Introduction

- 1. Vectos Microsim (VM) is assisting in the assessment of the impacts of delivering the allocated sites to the North of Oxford city, on the transport network, using the Oxford north VISSIM model.
- 2. The work is being undertaken on behalf of multiple site promotors and is assessing the effects of the allocated sites references PR6(a&b), PR7(a&b), PR8 and PR9.
- 3. The cumulative effect of delivering these sites is being considered alongside a series of key, consented developments which have been identified for inclusion within the assessment through a separate scoping exercise conducted with Oxfordshire County Council (OCC).
- 4. The primary objective of this study is to identify the effects on network operation arising from traffic forecasts associated with the allocated and consented developments, inclusive of any consented infrastructure proposals, to determine the level of mode shift which will need to be achieved to enable the allocation strategy to be delivered in a manner which is acceptable to OCC.
- 5. The VISSIM microsimulation model network extent, as well as the key development locations, is illustrated within **Figure 1** overleaf.

Purpose of this Note

6. The purpose of this note is to set out for discussion and agreement the assumptions to be applied to the demands within the VISSIM model to replicate the expected effects of changes in travel behaviour arising from the delivery of enhancements to the sustainable and active travel networks.

Background

- 7. The North Oxford VISSIM model has been provided to VM by OCC and has been adjusted to account for the traffic growth projected to occur because of the delivery of an agreed set of committed developments and the allocated PR sites.
- 8. The Local Plan Part 1 Partial Review runs to 2031. The PR sites are expected to be constructed and completed during this period up to 2031, albeit PR8 is expected to be completed shortly after by 2033. Therefore, the Future Reference Case model will establish local highway network conditions, taking into account any appropriate background traffic growth, consented development traffic and PR site traffic upon full completion.



9. The assumptions contained within these model scenarios have been circulated and reported separately and have resulted in the development of a Future Year set of models which contain committed development and PR sites and associated infrastructure.

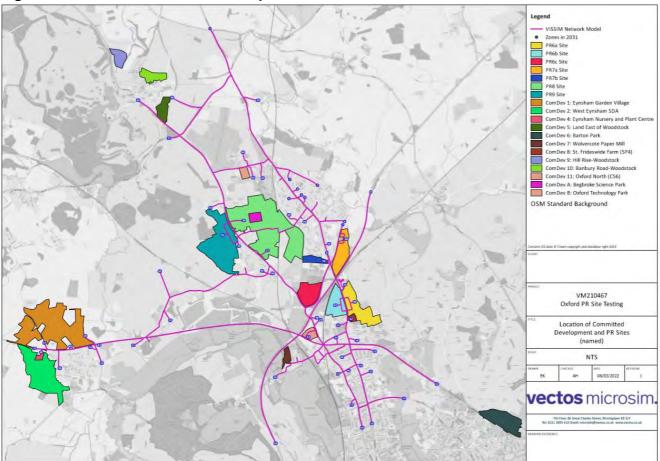


Figure 1: Model Extent and Development Locations

Objective

- 10. The objective of this stage of the assessment is to test the impact of the cumulative PR site delivery on the road network, and to establish the mitigation and sustainability measures required to ensure the network is capable of accommodating the trips associated with these developments.
- 11. A package of measures has been identified in Infrastructure Delivery Plan (IDP) in Appendix 4 of the Cherwell Local Plan (Part 1) 2011-2031 Partial Review (referred to as the IDP package) that focus on sustainable transport interventions, to be funded by the PR sites, that are aimed at improving the operation of the network whilst also helping OCC achieve their modal shift targets. This note sets out how these measures have been included within the modelling.

Demand Responses

12. The deterministic nature of microsimulation modelling techniques means that the forecasts will need to be subject to manual adjustments to account for the expected behavioural responses.



- 13. Microsimulation modelling does not utilise Variable Demand Modelling (VDM) approaches to reduce traffic flows in the face of increasing journey costs. It should also be noted that traditional VDM approaches are limited with regards the ability to reflect changes induced by enhancements to the active travel network in any event.
- 14. Thus, it has been agreed that manual adjustments to the model demands are considered an acceptable way of accounting for the behavioural changes which are expected within the study area.
- 15. The primary behavioural change which is anticipated is that of a change in mode. However, a change in departure time may also occur (i.e. peak spreading) if, following the mode shift assumptions, the network function has not recovered to an acceptable level. Peak spreading has not been included as part of this modelling exercise but it is considered likely that it would occur.
- 16. There are four behavioural responses which this work seeks to capture:
 - Park and Ride Shift: Whereby drivers terminate at the Park & Ride sites and continue their journeys in to the city via the P&R bus services.
 - Active Travel Shift: Whereby drivers choose to switch to active travel modes which is informed by the distances being travelled and enhancements to the active travel network.
 - Cycle Corridor Shift: Whereby key corridors have been defined to allow for an enhanced mode shift to be achieved, on a corridor basis, in response to the delivery of targeted infrastructure and, thus, is dependent upon the location of the zone relative to the corridor where the enhancements are being proposed.
 - Bus Corridor Shift: Whereby the A44 corridor has been identified as a key corridor for enhanced public transport services and associated demand adjustments have been included.
- 17. These behavioural responses have been defined through a series of assumptions which can then be applied to the model demands to reflect the effect that the shift will have on network operation.
- 18. A key aspect of this methodology is the initial assumption set. These are the controls which effect how (and which) demands are adjusted to capture the various behavioural responses.
- 19. It is these assumptions which are to be agreed through this discussion note and are set out in detail towards the end of this note.
- 20. Whilst these four behavioural responses have been justified through the associated demand adjustments, there are other measures promoted within the Oxfordshire County Council Local Transport and Connectivity Plan (LTCP) that have not been accounted for, including traffic filters, zero emission zones and a workplace parking levy. It is therefore expected that the targeted measures set out in the LTCP will reduce traffic levels further than the cumulative adjustments undertaken for this modelling exercise, and whilst every attempt has been made to ensure the



proposed adjustments are sensible in magnitude and transparent in rationale, in reality demand 'adjustments' (i.e. modal shift and/or trip spreading) are likely to be far more wide-ranging.

Outline Methodology

- 21. At each stage of the process the demand responses are added incrementally and in the order stated. Thus, adjustments are first applied to reflect the impacts of the P&R switch before subsequently moving on to the Active Travel effects.
- 22. An overview of this method is summarised as follows:
 - The zone system within the model has been reviewed and zones have been classified based on their location which, in turn, influences which behavioural responses they are susceptible to, and the level of susceptibility thereof.
 - Catchment areas have been defined for the Oxford Airport P&R site and trips which travel past the P&R site into the city that may realistically shift to the P&R services have been identified and intercepted. The level of intercept being determined by the car park capacities and expected accumulations for Oxford Airport P&R utilising OCC data contained within the planning application for the Eynsham P&R.
 - Using the zone classifications to guide which zones will be affected by Active Travel measures, the distances between different origin / destination pairs has been established. Shifts to walking have been based on journey distances of 1.65km or less whilst cycling intercepts are currently constrained to trip distances of up to 6.6km. Varying percentages have been applied to the trips which fall below these distances to reduce the car-based trips within the model and reflect the increased uptake in these modes.
 - Additional analysis has been undertaken to assign zones to key corridors within the model area which may subsequently be subject to a further enhancement (i.e. in addition to that which occurs as a result of intercepts informed by trip distance). These corridor adjustments are informed by the presumption of effect on a corridor basis in response to proposed infrastructure being delivered along a specific corridor which will increase provision for cyclists which is expected to lead to a corresponding increase in cycling as a mode of transport as a result.
 - A final adjustment is applied in response to the specific commitment by the PR working group to fund additional bus services along the A44 corridor.
- 23. Each stage requires a series of assumptions to be applied based on a combination of the origin/destination zone type and pair as well as, in some cases the trip distances. Details as to the initial assumptions applied for each discrete stage are provided within the following section.
- 24. OCC has provided a 2018 and a 2023 Base VISSIM model. The 2023 model has been derived by applying adjustments to the 2018 demands to account for the delivery of consented developments within the intervening period. Since the updated forecasting procedure being developed by VM includes for each individual development to be accounted for explicitly within the model network, the



2018 demands have been used as the starting point for the adjustments to then be applied as set out for each stage incrementally.

Initial Model Demands

- 25. At each stage the demand adjustments are applied to different matrix levels depending upon the nature of the adjustment being applied.
- 26. Within the VISSIM model, this is controlled by the fact that each of the key demand segments is assigned to the model via its own specific demand assignment matrix. This means that the demand associated with Light Vehicles, Heavy Vehicles, Committed Developments and each individual PR allocation can be identified separately within the model network.
- 27. Excluding the HGV vehicles as they are not expected to be affected by mode shift and behaviour change, there are 8 demand segments which assign vehicles within the model network. The initial demands which have identified following the review of development inputs, for light vehicles only, are presented within the following table:



Demand	AM 1	AM 2	AM 3	PM 1	PM 2	PM 3
Background Lights	15668	16472	14280	15156	16900	17860
Com Dev	1826	2990	1949	2191	2765	2960
PR6a	160	183	91	182	190	213
PR6b	119	126	70	138	145	170
PR7a	78	87	48	90	94	110
PR7b	27	33	31	40	45	45
PR8	1054	1004	880	898	940	877
PR9	114	112	91	101	139	156
Total	19046	21007	17440	18796	21218	22391

Table 1: 2031 Cumulative Scenario Demands (no Adjustment)

- 28. This table reveals that, across the entire AM and PM period the traffic growth which is forecast to occur, in light vehicle movements within the study area, currently stands at around 22 to 28% which is made up of 12 to 18% increase derived from the inclusion of the consented development traffic growth and 8 to 10% growth derived from the PR allocations.
- 29. These demands were reviewed and considered to be unrealistic in light of the OCC LTCP mode shift targets as well as the outcome of local trend analysis which considered the rate at which traffic volumes had changed within the model alongside the rate at which housing levels had increased. As a result of this additional analysis it was deemed appropriate to adjust the demands to accommodate the traffic forecasts associated with the committed developments whilst constraining the overall traffic volumes within the model.
- 30. As a result of this process, the demands used as the basis for the mode shift analysis have been adjusted such that, when committed developments are included, the overall traffic volumes remain consistent with the base figures (i.e. growth is at 0%) and then the PR site demands are included in addition to these.



Demand	AM 1	AM 2	AM 3	PM 1	PM 2	PM 3
Background Lights	13842	13482	12331	12965	14135	14900
Com Dev	1826	2990	1949	2191	2765	2960
PR6a	160	183	91	182	190	213
PR6b	119	126	70	138	145	170
PR7a	78	87	48	90	94	110
PR7b	27	33	31	40	45	45
PR8	1054	1004	880	898	940	877
PR9	114	112	91	101	139	156
Total	17220	18017	15491	16605	18453	19431

Table 2: 2031 Cumulative Scenario Demands (post trend Adjustment)

- 31. This table reveals that inclusion of the PR site demands alone, in addition to the committed developments which have already been supplanted within the baseline matrices, represents an increase in traffic volumes of between 8% to 10% per period.
- 32. These demand matrices have then been subject to the adjustments to account for changes in travel behaviour in response to increased uptake in different modes of transport. This has been set out in more details as follows.



Zone Classifications


- 33. The first stage of the methodology requires the model zones to be categorised into different types based upon the location of the zone and the type of loading point it represents.
- 34. Three classifications have been identified at this stage:
 - Internal Zones: zones which represent loading points for local trips which are likely to have been generated close to the zone location.
 - External Major Zones: zones which represent trips loading in via major roads such as the strategic road network, where the origin and destination are unknown but trip length distribution will likely be biased towards longer distance trips.
 - External Minor Zones: Zones which represent loading points that link on to the local road network, A-Roads and B-Roads which will carry a lot of traffic but are not skewed towards SRN style long distance trips (such as those zones which represent the points of access in to the City).
- 35. The classification of zones that has been applied is illustrated within Figure 2 overleaf. These classifications inform the application of certain demand adjustments, specifically concerning the accounting for Active Travel within the model network.

Park and Ride Adjustments

- 36. The first demand adjustment which has been applied is intended to reflect the delivery of P&R proposals at Oxford Airport.
- 37. Car park accumulation data has been translated into an intercept level which extracts demands from the model network proportionally based on a select number of origin destination pairs until the car park accumulation has been equalled by a reduction in car trips on the model network.
- 38. An adjustment to the accumulation was then applied based on the demand profile within the model attributable to the OD pairs that fall within the intercept region. The accumulation profile was adjusted to reflect the proportions of trips within each hour that could be intercepted.
- 39. This means that if the car park was projected to fill 37% of the spaces but the model demands only exist for 35% of the spaces then the 35% target is used and the remaining 2% of spaces are filled in other hours where the demand is observed to exist. This ensured that the car park accumulation targets could be met, over the three hours, provided there was sufficient demand within the model over that period.
- 40. With Oxford Airport P&R the occupancy and accumulation percentages have been adjusted based on likely intercept levels and this has ensured that the car park accumulation targets are fully matched over the 3-hour model periods.
- 41. Trips are intercepted travelling between the Origin Zones to the Destination Zones during the AM. Instead of trips between the Origin and Destination zones the trips travel between the Origin zones to



the P&R and then, during the PM they travel from the P&R to the Origin zones. The trips from the P&R to and from the destination zones in the AM/PM periods are assumed to be supplanted by the P&R services.

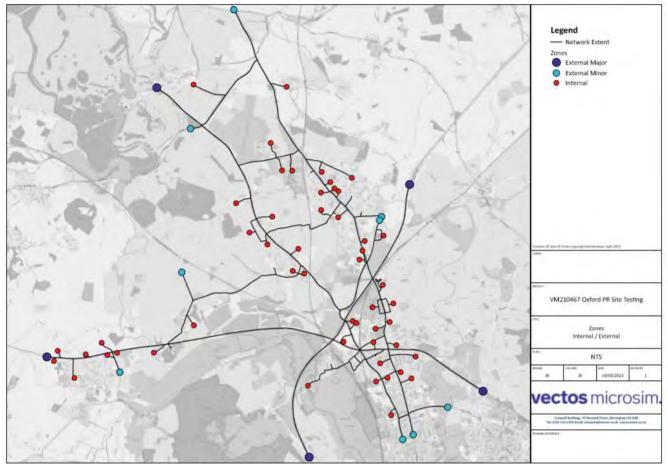




42. The catchment assumptions for the Airport Park and Ride is illustrated within **Figure 3**.



Figure 3: Airport P&R Catchment

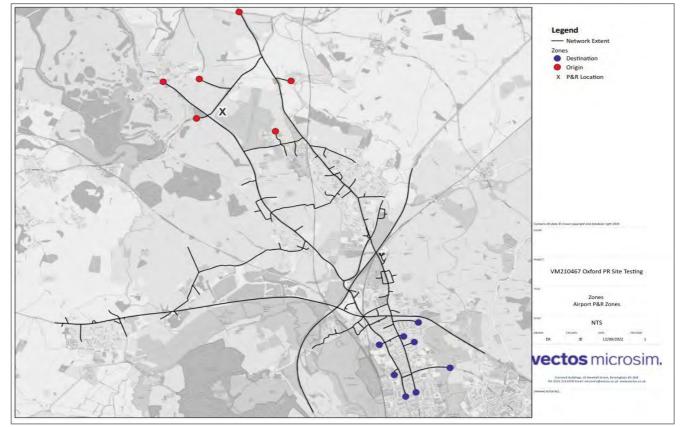

- 43. As has been stated previously, the P&R intercepts work by identifying origin destination pairs that could realistically divert to use the P&R. They depart the Origin Zone and then travel to the P&R where the P&R service facilitates the remainder of the trip. During the PM the trips from the destination are removed and instead trips are implemented from the P&R zone to the original destination.
- 44. Trips are assumed to be intercepted from both Background and Committed Development matrices. The reductions are applied proportionally dependent upon the level of demand in each segment (i.e. as demands are typically higher within the background matrix level compared to the committed development matrices).
- 45. The total intercept for the Airport P&R, based on the car park occupancy, is 992 trips in the AM and 685 trips in the PM. Based on the analysis of the trips which are contained within the demand matrices there are a possible 892 AM and 966 PM trips which could divert in response to the delivery of the P&R leaving around 0 car trips in the AM and 281 trips in the PM which remain as car trips within the model. The remaining trips are now assumed to use the Airport P&R service.
- 46. A summary of the resultant impact on the model demands, arising from these changes, is provided within **Table 3** below.
- 47. **Table 3** illustrates that the net reduction in traffic volumes, arising from the application of the P&R induced demand adjustments, is around a 2% to 3% reduction in car trips across each individual hour. This effect would be reduced if the Airport P&R trips were reinstated at the P&R site but for



simplicity this stage has not been undertaken due to the limited impact upon the road network (as trips would be originating at northern zones and ending their trip at the new P&R zone located only a short distance away).

Demand	AM 1	AM 2	AM 3	PM 1	PM 2	PM 3
Input Demands	15668	16472	14280	15156	16900	17860
Airport Subtracted	-376	-287	-230	-240	-232	-214
% Diff	-2.40%	-1.74%	-1.61%	-1.58%	-1.37%	-1.20%

Table 3: 2031 P&R Demand Adjustment Summary

48. These reductions are applied wholly to the Background Light and Committed Development matrices. The adjusted P&R demands have then been taken forward to the next step where adjustments have been made to account for walking and cycling.

Active Travel Adjustments

- 49. The application of Active Travel adjustments is intended to reflect the shift in trips from car to active modes in response to the provision of enhancements to the transport networks to encourage active travel uptake.
- 50. The adjustments to the demands have been applied to reflect two different shifts:
 - Mode shift based on the intercepting of trips under a certain threshold.
 - Mode shift due to proximity of trips to corridors where further enhancements may be proposed.
- 51. Adjustments to OD pairs to reflect a shift to Active modes needs to also be restricted to the zones where the shift can realistically be achieved. This means that trips where at least one trip end is associated with an External Major zone are omitted from this exercise. This is because those trip ends are generally expected to be significantly further away than the point of entry/exit represented by the zones within the model.
- 52. Similarly, several External Minor zones were excluded on the grounds that they also represent loading points for trips where the vast majority would be expected to travel further than the point represented by the External Minor zone. Not all External Minor zones were excluded from this process however as the zones to the north of the city are considered to be representative of a number of short distance trips as well as longer distance trips due to proximity to the city centre.



- 53. Those External Minor zones retained in this process have been classified as 'Edge' zones and a percentage of the trip interactions with these zones is affected by the adjustments whilst 100% of trips between the internal zones, which meet the distance criteria, can be adjusted to reflect the shift in mode.
- 54. The Internal and Edge zones are therefore susceptible to demand reductions in response to Active travel uptake and the location of these zones is illustrated within **Figure 4**.


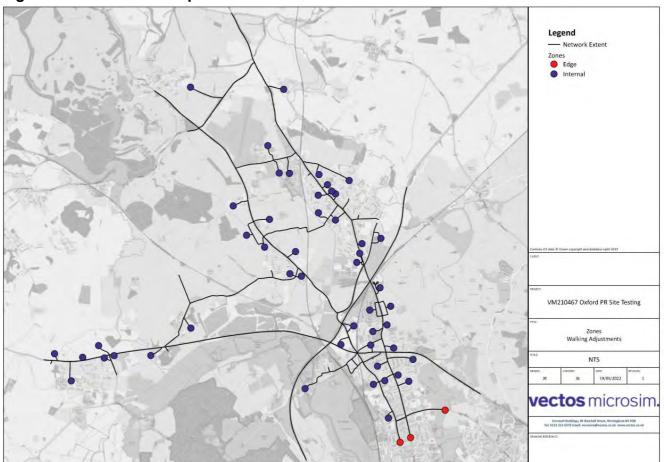


Figure 4: Active Travel Uptake Zones

55. Where the adjustments have been made on a corridor basis, zones have been subject to a further categorisation to reflect the location of the zone relative to the corridor being enhanced. The zone classifications adopted are illustrated within **Figure 5** overleaf and include Yarnton, Kidlington and Oxford with Yarnton and Kidlington being the areas for proposed enhancements but Oxford is also included on the basis that it is likely to be the case that a significant amount of the trips intercepted during the AM and PM peaks will have at least one trip end associated with Oxford City.



Figure 5: Bike Corridor Regions

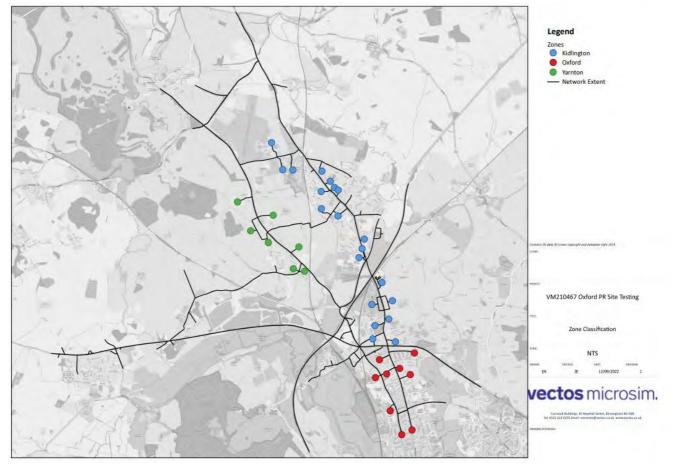

- 56. Before any adjustments for trip distances or corridor enhancements are applied (but with the Edge adjustment set at 40%, described later within this Note) analysis of the trips between these zones, within the Background and Committed Development matrices accounts for between 10% and 12% of the total demand within the model. Thus, the potential effects of any changes at this stage are limited by the fact that these zones do not create many trips relative to the wider model demands.
- 57. Trips between the Edge zones are limited in magnitude in any event due to the location of these zones, however, they are also not subject to any adjustment at this stage meaning trips must have at least one trip end which commences at an internal zone for it to be considered as a candidate for adjustment.
- 58. The application of the adjustments was first applied based on trip distances and then, subsequently, on a corridor basis. Each of these adjustments is described in more detail as follows:



Active Travel Based On Journey Distance

- 59. When using the DfTs Active Travel Appraisal Toolkit to calculate the benefits of active travel uptake the current assumptions are for walking trips to be around 1.1km on average and cycling trips to be 4.4km which is, in turn, informed by National Travel Survey Data.
- 60. A buffer of 50% has been added to these distances to identify the distance between ODs which will be affected by these adjustments.
- 61. Having set the journey distances at 1.6km for walking and 6.6km for cycling, the DfT propensity to cycle tool was interrogated to provide an indication of the cycle intercept/driver reduction figures that may be reasonable to target within the modelling.
- 62. The 'Go Dutch' model was used for this purpose which indicated an uplift in cycling from around 6% to 24% of commuter trips. Therefore 18% of the commuter trips within the model area were identified as appropriately switching to cycling.
- 63. No similar data exists for walking and so, given that the expectation is that these trips are easier to intercept, a 50% shift was adopted although, as is noted later within this section, the small number of short distance trips means the effect of this adjustment is limited in any event.
- 64. The absolute figures, in terms of driver reductions, was also assessed to determine the level of trip intercept the PCT tool currently products with the Go Dutch model at key wards around the study area.
- 65. The wards selected included:
 - Cherwell 017
 - Cherwell 018
 - Cherwell 019
 - Oxford 001
 - Oxford 002
- 66. The PCT tool predicted 1097 daily trips would be intercepted across all these wards. Using this as a target (and recognising that the City is the major draw for commuter trips) the edge factor was then adjusted until a value comparable to the 1097 was observed. Although this is a cycling-based analysis exercise, the same edge adjustment was applied to walking as no other information was available in a similar format to inform that estimate.
- 67. An edge zone adjustment of 40% was identified meaning that 40% of trips between the Edge zones and the internal zones, within 1.5km for walking and within 6.6km for cycling, would be subject to the same adjustment for switching to active modes as the internal-to-internal zones (i.e. 50% for walking and 18% for cycling).



- 68. Application of this factor resulted in 912 cycling trips being removed from the model area, which is considered comparable to the 1097 daily trips observed through the analysis of the PCT tool data when taking into account the model represents the 6 busiest hours and therefore the vast majority of forecast cycling trips (with the remaining shift occurring in the hours outside the 3-hour AM and PM peaks).
- 69. In summary, trip ends must comprise at least one internal zone to be considered as appropriate to adjust. Edge zones are adjusted by a fixed percentage and, again, only when the alternate trip end is an internal zone. The distance between ODs controls whether it can be adjusted and the walking adjustment has been applied first meaning that the cycling adjustment for any trips which lie between qualifying OD pairs is applied after the walking adjustment. It is possible to set a minimum Cycle distance if there is a wish to minimise the potential overlap between the two adjustments.
- 70. The critical assumptions applied during this process therefore are:
 - Adjustments are constrained, at this stage, to just the background and committed development matrices.
 - Trips must have at least one trip end associated with an internal zone.
 - Trips associated with most External zones are excluded.
 - For the External zones which are included, 40% of trips between the External zones (termed Edge) and other internal zones may be affected provided the fall within the following distance criteria:
 - Trip lengths of 1.6km or less may shift to walking.
 - Trip lengths of 6.6km or less may shift to cycling.
 - 50% of trips which meet the walking criteria are assumed to shift.
 - 18% of trips which meet the cycling criteria are assumed to shift.
- 71. An illustration of the effect that these adjustments has on the overall model demands is provided within **Table 4** overleaf.



Demand	AM 1	AM 2	AM 3	PM 1	PM 2	РМ 3
Input Demands	15668	16472	14280	15156	16900	17860
Post P&R	15292	16185	14050	14916	16668	17646
Post Active Mode Adjustment	15015	15709	13756	14704	16406	17390
Walking Adjustment	-108	-274	-164	-72	-141	-108
Cycling Adjustment	-170	-202	-131	-140	-121	-148
Net	-277	-476	-294	-212	-262	-256
Shift from initial	-1.77%	-2.89%	-2.06%	-1.40%	-1.55%	-1.44%

Table 4: 2031 Active Mode Trip Distance Demand Adjustment Summary

- 72. The data within **Table 4** reveals that the active travel adjustments induces a reduction of around 1.4 to 2.89% of car-based trips within the model area based on the application of the aforementioned criteria.
- 73. These demands have then been taken forward to the next stage where demands are subject to a further adjustment to account for increased cycle use.

Cycle Corridor Adjustments

- 74. Following the initial adjustment based on trip distances, a subsequent adjustment has been applied based on the proximity of the zone to proposed infrastructure.
- 75. Both the A44 and Kidlington corridors are proposed to be enhanced. Origin/destination pairs were identified whereby at least one trip end lies in the regions identified. Trips within each cycle corridor region (Yarnton or Kidlington) and trips between these regions the Oxford central region were identified and a further 20% adjustment applied to those OD pairs to reflect an increase in cycle uptake.
- 76. Trips within each region and between each region and Oxford, as well as trips internal to the Oxford region, were all subject to an adjustment of 20% to reflect increases in cycle trips and a corresponding reduction in car-based trips.



77. The effect that these adjustments have had on the demands is summarised within **Table 5** below. This illustrates that the additional reductions as a result of the corridor enhancements is lower than 1% per hour.

-						
Demand	AM 1	AM 2	AM 3	PM 1	PM 2	PM 3
Input Demands	15668	16472	14280	15156	16900	17860
Post P&R & Active Modes	15015	15709	13756	14704	16406	17390
Post Cycle Corridors	14892	15563	13625	14625	16298	17266
Corridor adjustments	-123	-146	-130	-79	-109	-124
Shift from initial	-0.79%	-0.89%	-0.91%	-0.52%	-0.64%	-0.70%

Table 5: Cycle Corridor Demand Adjustments


78. These demands have then been taken forward to the final stage where demands are subject to a further adjustment to account for increased bus service provision between Oxford and Begbroke.

A44 Bus Corridor Adjustments

- 79. As part of the mitigation strategy proposed by the Modelling Working Group, and in line with one of the items contained within the Oxfordshire Infrastructure Delivery Plan (IDP), it is proposed to fund an additional four services per hour along the A44 corridor between Oxford and Begbroke.
- 80. To account for the potential effect on private car demand along the corridor, the matrices for background and committed development trips were interrogated to identify OD movements that may benefit from the provision of these additional services.
- 81. The zones identified, and thus the north-to-south and south-to-north movements that would be included within the catchment of movements that are subject to adjustment, are illustrated in the Figure overleaf:



Figure 6: A44 Bus Corridor Zones

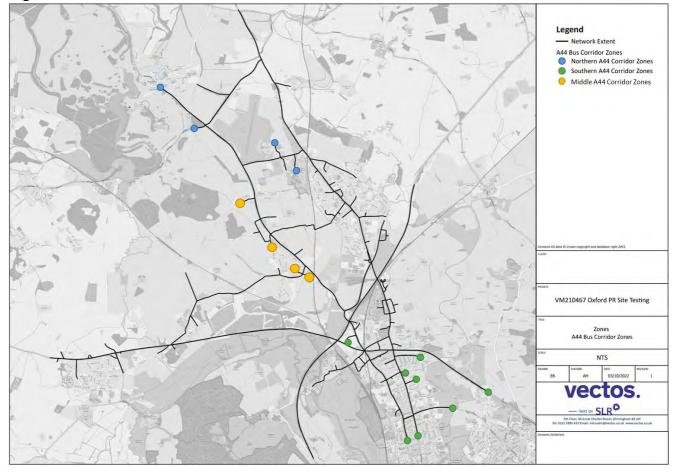

- 82. Of all the movements captured within these ODs, a value of 20% has been assumed as the rate of shift to utilise the new services, equating to a reduction in vehicle movements of 95-173 trips per hour, in turn equating to an average patronage on each service of between 25-45 passengers.
- 83. In addition, PR8 is proposing to fund a 20-seat 'hopper-style' community bus service between Yarnton and Kidlington. To account for the potential take up of this service, zones within the catchments of Yarnton and Kidlington were identified and as per the above methodology, 20% of the ODs within the catchment are assumed to shift to this service. The resulting shift is equal to ~15 trips per hour.



able 6: A44 Bus Corridor Demand Adjustments									
Demand	AM 1	AM 2	AM 3	PM 1	PM 2	PM 3			
Input Demands	15668	16472	14280	15156	16900	17860			
Post P&R & Active Modes & Cycle Corridor	14892	15563	13625	14625	16298	17266			
Post A44 Bus Corridor	14796	15434	13528	14527	16156	17093			
A44 Bus Adjustments	-83	-104	-84	-83	-132	-159			
'Hopper-Bus' Adjustment	-13	-25	-13	-14	-10	-14			
Shift from initial	-0.61%	-0.78%	-0.68%	-0.64%	-0.84%	-0.97%			

84. A breakdown of the adjustments applied can be found in **Table 6** below.

85. Following this final stage, the demands are taken forward and included within the Do-Something VISSIM modelling scenarios to provide an overview of network performance inclusive of the PR sites and the associated mitigation/sustainability measures.

Demand Adjustment Summary

A detailed breakdown of the effect of each adjustment on the overall demands is presented within 86. Table 7.

Table 7: Incremental Adjustments By Stage

Corridor	AM 1	AM 2	AM 3	PM 1	PM 2	PM 3
P&R Adjustment	-376	-287	-230	-240	-232	-214
Active Mode Adjustment	-277	-476	-294	-212	-262	-256
Bike Corridor Adjustment	-123	-146	-130	-79	-109	-124
Bus Corridor Adjustment	-95	-129	-97	-97	-141	-173
Total	-872	-1038	-752	-629	-744	-767

87. This reveals that the largest shift in mode is realised by the P&R adjustment. The effect that these adjustments have on the overall model growth projects are summarised within Table 8 which reveals that an overall reduction of between 4.2% and 6.3% of the vehicle movements within the VISSIM model network is achieved as a result of the application of the assumptions set out within this note.



Demand	AM 1	AM 2	AM 3	PM 1	PM 2	PM 3
Input Demands	15668	16472	14280	15156	16900	17860
Output Demands	14796	15434	13528	14527	16156	17093
Difference	-872	-1038	-752	-629	-744	-767
Shift from initial	-5.56%	-6.30%	-5.27%	-4.15%	-4.40%	-4.29%

Table 8: Revised Demand projections (pre assignment of PR sites)

Sensitivity Testing

- 88. Following an initial review by Pell Frischmann (PF) on behalf of Oxfordshire County Council (OCC), whilst the methodology was broadly agreeable PF requested that sensitivity testing be carried out that creates upper and lower limits against the core assumptions detailed above, in accordance with the OCC 'Decide and Provide' guidance.
- 89. At each stage of the mode shift adjustments, a series of assumptions are set to determine which demands are included as part of the adjustment process, and to what extent movements are reduced in line with the anticipated level of mode shift that might occur.
- 90. In Table 5.1 of their Review, PF advised a set of alternative criteria to be applied; an extract is provided below:

Figure 7: Pell Frischmann Alternative Assumptions for Sensitivity Testing

Spreadsheet	Sheet	alues that can be altered	Cells	VM Value	Low value	High value	
VM210467.SP009 Demand Adjustment A40 Growth Scheme - Audit		Corridor A40	N2	Yes	N/A	N/A	
	Demand Summary	External Major	N5 to P5	5%, 7.5%, 10%	2.5%,5%,7.5%	7.5%,10%,12.5%	
		External Minor	N6 to P6	7.5%, 5%, 15%	5%, 2.5%, 12.5%	10%, 7.5%, 17.5%	
		Internal	N7 to P7	10%, 15%, 25%	7.5%, 12.5%, 22.5%	12.5%, 17.5%, 27.5%	
MI210167 SD012 Demand Adjustment 1 DPD	12.4	Airport P&R	N2	Yes	N/A 2.5%,5%,7.5% 5%,2.5%,12.5% 67.5%,12.5%,22.5% N/A N/A OCC to check 20% 800 4000 10% 20% 10% 10% 10%	N/A	
VM210467.SP013 Demand Adjustment 1 - P&R -	Demand Summary	Eynsham	N3	Yes	N/A	N/A	
Audit		Airport P&R spaces	C42	1100	N/A 2.5%,5%,7.5% 5%,2.5%,12.5% 67.5%,12.5%,22.59 N/A N/A OCC to check 20% 20% 800 4000 10% 10% 10% 10%	OCC to check	
	Demand Summary	WALKING LIMIT (m)	X2	1650			
		SHIFT INTERNAL	X3	50%	20%	30%	
		EDGE ADJUSTMENT	X4	40%	20%	30%	
VM210467.SP015 Demand Adjustment 1 - Active		CYCLE MINIMUM (m)	X17	0	800	1650	
wodes - Audit		CYCLE MAXIMUM (m)	X18	6600	4000	8250	
lodes - Audit		SHIFT INTERNAL	X19	18%	10%	25%	
	1.1	EDGE ADJUSTMENT	X20	40%	2.5%,5%,7.5% 5%, 2.5%, 12.5% 7.5%, 12.5%, 22.5% N/A OCC to check 20% 20% 800 4000 10% 20% 10% 10%	30%	
VM210467.SP016 Demand Adjustment 1 - Bike	Demand Summary	Corridor Yarnton	N3 and O3	20%	10%	30%	
		Corridor Kidlington	N4 and O4	20%	10%	30%	
Corridors - Audit		Oxford internal	N5 and O5	20%	N/A 2.5%,5%,7.5% 5%, 2.5%, 12.5% 7.5%, 12.5%,22.5% N/A OCC to check 20% 20% 800 4000 10% 10% 10% 10% 10%	30%	
/M210467.SP017 Demand Adjustment - Additional A44 Bus Services - Audit	Total Catchment Base	Assumed % Shift	D32	20%	10%	30%	
	Total Catchment Com Dev	Assumed % Shift	N32	20%	10%	30%	

Table 5.1: Adjustable Parameters and Selected Values for Low and High Sensitivity Tests



91. These have been calculated and run for the purposes of this revised assessment using the same methodology as detailed within this Note (just with the revised criteria as per the Table above). The adjustments by stage for the Low Sensitivity and High Sensitivity are provided below:

Table 9: Incremental Adjustments By Stage, Low Sensitivity

Corridor	AM 1	AM 2	AM 3	PM 1	PM 2	PM 3
P&R Adjustment	-376	-287	-230	-240	-232	-214
Active Mode Adjustment	-101	-181	-105	-85	-94	-90
Bike Corridor Adjustment	-66	-85	-75	-43	-62	-65
Bus Corridor Adjustment	-50	-67	-50	-50	-75	-91
Total	-593	-619	-459	-418	-463	-460
Shift from Initial	-3.78%	-3.76%	-3.21%	-2.76%	-2.74%	-2.57%

Table 10: Incremental Adjustments By Stage, High Sensitivity

Corridor	AM 1	AM 2	AM 3	PM 1	PM 2	PM 3
P&R Adjustment	-376	-287	-230	-240	-232	-214
Active Mode Adjustment	-304	-439	-288	-231	-240	-252
Bike Corridor Adjustment	-175	-225	-201	-116	-170	-183
Bus Corridor Adjustment	-133	-189	-140	-142	-205	-248
Total	-987	-1140	-859	-730	-846	-897
Shift from Initial	-6.30%	-6.92%	-6.02%	-4.82%	-5.00%	-5.02%

Appendix C



Oxford PR Sites VISSIM Assessment Audit Response and Amendments to V9 Assessment

VM210467.DN03 May 2023

Introduction

- 1. Vectos Microsim (VM) has been commissioned by a multi-consultancy group working on behalf of a number of Partial Review (PR) Sites that are allocated within the adopted Cherwell Local Plan (Part 1) Partial Review.
- 2. VM has been working with all parties to deliver microsimulation modelling support with a view to identifying the necessary mitigation strategies required to all PR sites to come forward within the Local Plan period.
- 3. VM submitted the first package of models, supporting spreadsheets and reports in November 2022; this was known as v9. This was subsequently reviewed by Pell Frischmann (PF) in their capacity as highway consultants for Oxfordshire County Council (OCC). VM received the Pell Frischmann Audit on 31st January 2023.
- 4. VM reviewed the comments raised and a meeting between VM, the PR working group, PF and OCC was held in early February 2023. It was agreed that some revisions were necessary to the modelling and this Note serves as a document of the changes that have been made between the v9 submission and this latest submission, which is known as v13.

Responses to v9 Audit Comments

5. The section below will identify the paragraph number referred to within the PF review, followed by text to confirm the VM response to the issue(s) raised:

Paragraph 3.1

6. PF queried why the Base, 2031 Reference Case and 2031 DM/DS modelling was contained within three separate model folders. The reason is that the Base and 2023 model provided to VM were in separate model folders and therefore, as the 2023 was the starting point for the exercise this separation was maintained. However due to the requirement to update the modelling in other areas, the future year tests are now all contained within the same folder under Scenario Management. Note however that the Base remains a separate file due to the need to build the future year models from the received 2023.



Paragraph 3.2

- 7. PF raised a number of bullet points:
 - i. A full review of layby usage has been undertaken and corrected (bus layby usage was present within the received model and is therefore a legacy issue)
 - ii. Pedestrian crossings have been reinstated some were erroneously missing from v9
 - iii. The pedestrian crossing north of Hermes Road, and those on the exit crossings at Wolvercote and Cutteslowe Roundabouts were not present within the Base model and are therefore omitted from the future year to ensure the baseline is not invalidated
 - iv. The issue on Link 31210 was in the received 2023 and corrected from the 2031 Reference Case onwards
 - v. Operation of Cassington Roundabout is optimised as best as possible within the bounds of what can be reasonably achieved
 - vi. Some trips were included in the demand matrix wishing to travel from Witney Road to the East of the model, which is an impossible movement. These have been removed from the demand matrices (the values were <1 trip and so their omission is of no consequence to the modelling)

Paragraph 3.3

- 8. PF raised four bullet points:
 - i. Behaviour on Link 30322 is optimised as best as possible
 - ii. The error message refers to an issue within the received signal configuration, but only occurs on start up and does not affect the model
 - iii. Detector 11 missing at SC1021
 - iv. Trips present within the matrix from Witney Road have been removed, as per the comment in paragraph 7 above
- 9. Furthermore, PF identified that bus services were identical between AM and PM peak periods. This error was present within the received 2023 model, but has now been corrected whereby the future year services match the respective baseline, with some exceptions as noted within Chapter 6.4 of the North Oxford Corridor Study¹ that details the development of the 2023 VISSIM model.
- 10. PF also queried whether new bus services proposed, and/or increased pedestrian frequencies should be included within the modelling in response to the anticipated increase in modal shift to non-

¹ North Oxford Corridor Study Mar 2021_v0.14



car-based travel. For this revised modelling bus services have been added into the Do-Something scenario where a specific bus service is proposed (such as the S3 service running a schedule of 4 per hour). Also, the percentage modal shift resulting from walking and cycling that has been calculated for each of the mode shift scenarios (Core, Lower Sensitivity and Higher Sensitivity) is applied to the crossing frequencies of all crossings across the model extent. For example, the core scenario identifies that active modes, under the assumptions calculated for modelling purposes, can achieve a reduction in car use of 3.7%, therefore all movements at pedestrian crossings have been uplifted by 3.7%. For the Lower Sensitivity, the uplift is 1.6% and for the Higher Sensitivity, the uplift is 4.2%.

Paragraph 5.1

- 11. PF identified a series of adjustments to the input parameters that would allow for sensitivity testing to be undertaken. These have been created as per PF's recommendations and are reported in the revised v13 results.
- 12. Note that due to some revisions to the mode shift calculations (to be described later in this Note), the output numbers from the exercise differ slightly to the numbers reported in the PF Audit. Inputs into the methodology however remain as per PF's recommendations.

Other Amendments

13. The sub-sections below detail further changes that have been made to the modelling since the v9 submission.

PR6a Trip Generation and Distribution

- 14. Following the v9 submission, VM were advised of a revision to the quantum and make-up of development proposed for PR6a. Whilst the trip generation figures remain the same, the forecast total number of dwellings has been reduced from 820 to 800, and a school is now proposed for the site.
- 15. Spreadsheet VM210467.So002a PR6a Trip Gen and Distribution is now included within the suite of spreadsheets submitted. This calculates the proposed dwelling and school trip generation and distributions separately before combining them at the end for entry into VISSIM.
- 16. PR6b demand matrices remain as per the v9 submission.



17. The Table below provides the updated PR6a development trip numbers for v13.

	07:00	-08:00	08:00-	·09:00	09:00-10:00		
	In	Out	In	Out	In	Out	
V13 Submission	38	122	54	129	34	57	
	15:00	-16:00	16:00-	·17:00	17:00	-18:00	
	15:00- In	-16:00 Out	16:00- In	-17:00 Out	17:00- In	-18:00 Out	

Table 1: Revised PR8 Trip Generation

PR8 Trip Generation

- 18. The v9 submission assumed that all PR8 trips entered and exited the site via zone number 53. This was an error and has been corrected for this v13 submission; PR8 is to be accessed via a northern access (zone 30), and a southern access (zone 53).
- 19. VM also received revised trip numbers for PR8 which has increased the number of in and out trips associated with the proposed development. The changes are summarised below, and the spreadsheet VM210467.Sp005 PR8 Trip Gen and Distribution has been updated with the latest numbers.
- 20. The Table below provides the updated PR8 development trip numbers for v13.

Table 2: Revised PR8 Trip Generation

	07:00·	-08:00	08:00-	·09:00	09:00-10:00		
	In	Out	In Out		In	Out	
V13 Submission	771	282	735	269	644	236	
	15:00	-16:00	16:00-	17:00	17:00-	18:00	
	15:00- In	-16:00 Out	16:00- In	-17:00 Out	17:00- In	-18:00 Out	



Committed Development Demands

- 21. An error was highlighted in the demand calculations for the PM peak period whereby the total vehicle trips for the PM period were slightly higher than they should have been in the v9 submission. This was noted in paragraph 2.2 of the Pell Frischmann Audit. This has been corrected for v13.
- 22. In addition, the assumptions that underpinned the demand calculations for Eynsham Garden Village and West Eynsham SDA have been revised following queries raised by OCC.
- 23. The Table below provides the comparable Eynsham Garden Village trip numbers for v9 and v13.

Table 3: Revised Eynsham Garden Village Trip Generation

	07:00	-08:00	·00:80	-09:00	09:00-10:00		
	In	Out	In	Out	In	Out	
V9 Submission	61	78	113	118	111	41	
V13 Submission	163	144	303	218	297	77	
	15:00	-16:00	16:00·	-17:00	17:00	-18:00	
	15:00 In	-16:00 Out	16:00 [.] In	-17:00 Out	17:00 In	-18:00 Out	
V9 Submission		1			-	1	

24. The Table below provides the comparable West Eynsham SDA trip numbers for v9 and v13.

Table 4: Revised West Eynsham SDA Trip Generation

	07:00	-08:00	08:00	·09:00	09:00-10:00		
	In	Out	In	Out	In	Out	
V9 Submission	9	47	17	71	16	25	
V13 Submission	20	51	37	77	36	27	
	15:00	-16:00	16:00	·17:00	17:00	-18:00	
	15:00 In	-16:00 Out	16:00· In	-17:00 Out	17:00 In	-18:00 Out	
V9 Submission		1			-		

25. Note that the trip numbers in the Tables above refer to the number of trips included within the demand matrices entered into VISSIM, and not the total site trip generation. Under the methodology described within the forecasting report² a proportion of total trips are included within the VISSIM demands based on their direction of travel to or from the site.



26. An additional committed development has been included at the request of OCC; Land East of Park View (planning ref. 22/01715/OUT). Trip generation and distribution is informed by the Transport Assessment³.

Reference Case Demands

- 27. The methodology of capping the Reference Case demands to a zero growth position remains as per the v9 submission. However the mechanism by which this is achieved has been revised slightly for the purposes of developing v13.
- 28. Firstly, the initial step remains to revise demands along the A40 corridor in response to the proposed A40 bus lane allocated for growth funding. This is set out in spreadsheet VM210467.Sp009 Demand Adjustment A40 Growth Scheme. However on review the method applied in v9 was erroneous as it affected movements from the northern side of the A40 to the southern side of the A40, and vice versa, where the provision of an east-to-west bus corridor would be unlikely to impact these movements.
- 29. Therefore, the spreadsheet was revised to include only movements between a catchment of zones to the east and a catchment of zones to the west (both directions). The outcome is that fewer trips are removed from the demand matrices.
- 30. A further error was noted in the v9 submission whereby demand adjustments resulting from the proposed Park & Ride scheme at Eynsham were included as part of the mode shift assumptions applied post-inclusion of the PR development sites. As Eynsham P&R is a committed development that is not proposed to be funded by the PR working group, this should have been entered into the assumptions that underpin the Reference Case.
- 31. This is now the case in this revised v13 submission. Spreadsheet VM210467.Sp009a Eynsham P&R Adjustment has been included which identifies the OD movements that would be susceptible to using the new Park and Ride service. In accordance with the utilisation data present within AECOM's Transport Assessment, baseline demands are removed from the matrices as part of the assumed shift on to the Park and Ride.
- 32. Both the A40 mode shift attached to the Growth Fund Scheme, and the mode shift attached to the delivery of Eynsham Park and Ride, are applied to the demand matrices before the cap to 0%. As a result the total number of trips present within the v13 Reference Case is identical to the total number of trips present within the v9 Reference Case.

³ Land East of Park View Woodstock, Environmental Statement Technical Appendix F: Transport Assessment, Tables 7 and 9



Mode Shift Assumptions

- 33. The methodology adopted to layer mode shift assumptions into the VISSIM demands remains as per the v9 submission. There are however three key adjustments/enhancements:
 - a. The v9 submission included Eynsham Park and Ride adjustments into post-development mode shift and as identified above, this was erroneous and has instead been included in the Reference Case demand build for this v13 submission;
 - b. The process of adjusting A44 corridor demands as part of the shift due to bus provision has been adjusted; and
 - c. Sensitivity testing has been carried out for Lower and Higher criteria as identified by Pell Frischmann during their review of v9.
- 34. These updates are detailed within the revised Mode Shift Note⁴.

Kidlington Roundabout

- 35. Where the v9 submission maintained the network arrangement present within the received 2023 Growth Fund model, the network arrangement at Kidlington Roundabout has been revised in line with the latest proposals. The latest scheme drawing is provided within Appendix A of this Note.
- 36. The signals are included via VISVAP and are a duplication of signal controller 1020, as this is a nearby existing pedestrian crossing of a similar size to those proposed at Kidlington Roundabout. The number of pedestrians assumed to use the crossings is 80 per hour, which is also in line with the assumptions used for a nearby existing crossing.

Summary

37. This Note has been compiled to highlight the differences between the v9 submission from November 2022, and the latest v13 submission. The Note serves as a response to Pell Frischmann's Audit, detailing the steps VM has taken to address the issues raised during review. Other issues not highlighted by Pell Frischmann but that are considered to be errors within the original v9 modelling have also been corrected and are identified in this Note to assist Pell Frischmann in their updated review. Finally some assumptions which underpin the PR site trip generation have also been revised, and are also documented within this Note and the other Reports that accompany the v13 submission.

⁴ VM210467.DN01b PR VISSIM Mode Shift Discussion Note



Oxford PR Sites VISSIM Assessment Bus Impact Note

August 2023

Introduction

- 1. SLR has created this Note to provide an analysis of the bus journey times along key routes across the model extent.
- The full breakdown of the journey times along the sections making up the routes presented in Table
 1 and Table 2 can be found in Appendix A at the end of this document.

AM Peak

3. The Table below shows the bus journey time differences along the three main corridors in the model covered by bus routes, namely the A44/A4144 NB/SB, A4260/A4165 NB/SB, and A40 EB/WB. Each scenario has been compared to the 2031 Reference Case for the relevant time period and demonstrates the journey time change.

	0	7:00-08:0	0	0	8:00-09:0	0	09:00-10:00			
Route	DS Low	DS Core	DS High	DS Low	DS Core	DS High	DS Low	DS Core	DS High	
A44/A4144 NB	138	129	118	224	226	145	376	217	130	
A44/A4144 SB	215	160	97	490	371	226	529	555	192	
A4260/A4165 NB	58	71	50	112	29	67	379	67	38	
A4260/A4165 SB	9	24	-18	-27	-105	-129	75	-16	-14	
A40 EB	10	25	5	20	25	6	191	77	-10	
A40 WB	-1	0	2	3	1	4	1	-9	-3	

Table 1: AM Bus Journey Time Changes (seconds) in Comparison to Ref

- 4. Results shows that generally the largest bus journey time increases for each scenario compared to the Ref and for each time period are on the A44/A4144 SB. These increases are primarily on the SB approach to Cassington Roundabout which is known to exhibit delays in the future year scenarios. In each DS scenario, journey time increases are relatively constrained to the section immediately north of Cassington.
- 5. Likewise, the A44/A4144 NB shows journey time increases compared to the Ref, predominantly on the sections from Wolvercote to Loop Farm Roundabouts, and Cassington to Sandy Lane Roundabouts. The largest increase in the DS scenarios is ~6 minutes in the 09:00-10:00 period for DS Mode Shift Low Sensitivity, which considering this is for the entire NB section, is not considered



significant in light of the other results along this corridor. Journey times for private vehicles along this corridor show similar increases.

- 6. A4260/A4165 routes demonstrate minor impacts with journey time increases in comparison to the Ref on this corridor being ~1-2 minutes as a maximum. The only case where this doesn't follow is for DS Mode Shift Low Sensitivity 09:00-10:00 where the journey time increase NB is ~6 minutes. This increase is mainly attributable to the NB approach to Cutteslowe; private vehicle results show this same pattern.
- 7. A40 EB/WB sections show little impact as the bus routes do not pass through the section to the east of Wolvercote Roundabout and so do not reflect any delay increases there, and the majority of their routes that do cover the A40 use bus lanes hence are relatively unaffected by delays experienced by private vehicle traffic.

PM Peak

8. The Table below displays the journey time changes compared to the Reference Case for the PM peak.

	1	5:00-16:0	0	1	6:00-17:0	0	17:00-18:00			
Route	DS Low	DS Core	DS High	DS Low	DS Core	DS High	DS Low	DS Core	DS High	
A44/A4144 NB	91	75	74	84	80	65	72	51	39	
A44/A4144 SB	110	99	93	352	297	284	799	790	711	
A4260/A4165 NB	30	27	16	48	37	38	68	53	22	
A4260/A4165 SB	36	34	38	57	66	50	91	69	79	
A40 EB	12	15	11	21	12	4	9	9	5	
A40 WB	-5	-1	0	1	4	3	-4	-10	1	

Table 2: PM Bus Journey Time Changes (seconds) in Comparison to Ref

- 9. Like the AM, the largest journey time increases compared to the Ref are on A44/A4144 SB. Again, the increases primarily stem from the approach to Cassington Roundabout and are similar to the delays exhibited by private vehicles on this route. The third peak hour demonstrates journey time increases of ~12-13 minutes in the DS scenarios compared to the Ref, however for private vehicles this is ~1 minute more due to buses able to use the bus lane in the section approaching Loop Farm Roundabout and bypass the delays here.
- 10. Journey time increases across the other routes in the DS scenarios are no more than ~1.5 minutes, and reflect the same patterns as seen for private vehicles when comparing to the Ref.



Appendix A

Journey Times by Section

AM			Journey Time (Seconds)											
				07:00	-08:00			08:00	-09:00			09:00)-10:00	
Route		Section	Ref	DS Low	DS Core	DS High	Ref	DS Low	DS Core	DS High	Ref	DS Low	DS Core	DS High
	1	A4144 Woodstock Rd NB to Wolvercote Roundabout	368	382	385	382	361	383	381	376	367	390	383	379
	2	A44 Woodstock Rd NB Wolvercote Roundabout to Loop Farm Roundabout	146	176	177	169	166	196	212	177	163	258	200	173
	3	A44 Woodstock Rd NB Loop Farm Roundabout to Cassington Rd	80	89	87	87	85	93	93	90	80	86	83	85
	4	A44 Woodstock Rd NB Cassington Rd to Sandy Lane	93	142	127	129	109	230	215	175	95	272	196	159
A44/A4144 NB	5	A44 Woodstock Rd NB Sandy Lane to Begbroke HI	27	32	34	35	29	40	46	48	28	68	55	34
	6	A44 Woodstock Rd NB Begbroke HI to Spring Hill Rd	33	59	60	56	37	69	66	64	33	64	65	62
	7	A44 Woodstock Rd NB Spring Hill Rd to Langford Ln	55	56	56	56	56	56	56	55	54	56	55	56
	8	A44 Woodstock Rd NB Langford Ln to Bladon Roundabout	90	93	93	94	92	93	93	94	92	93	92	92
	9	A44 Woodstock Rd NB from Bladon Roundabout	99	102	101	101	102	101	102	102	102	104	102	103
	10	A44 Woodstock Rd SB to Bladon Roundabout	130	128	126	128	128	126	126	124	125	125	124	124
	11	A44 Woodstock Rd SB Bladon Roundabout to Langford Ln	79	79	78	79	82	80	79	78	78	78	79	78
	12	A44 Woodstock Rd SB Langford Ln to Spring Hill Rd	93	72	68	71	119	82	74	72	63	66	67	66
	13	A44 Woodstock Rd SB Spring Hill Rd to Begbroke HI	27	76	80	72	30	78	72	76	26	75	78	73
A44/A4144 SB	14	A44 Woodstock Rd SB Begbroke HI to Sandy Ln	41	77	67	66	62	82	73	81	41	55	63	60
	15	A44 Woodstock Rd SB Sandy Lane to Cassington Rd	70	225	181	128	71	484	404	262	90	436	414	187
	16	A44 Woodstock Rd SB Cassington Rd to Loop Farm Roundabout	95	94	97	93	97	102	98	96	106	130	129	102
	17	A44 Woodstock Rd SB Loop Farm Roundabout to Wolvercote Roundabout	157	163	163	160	215	255	239	224	249	335	375	274
	18	A4144 Woodstock Rd SB from Wolvercote Roundabout	399	394	391	392	578	583	588	594	367	375	373	374
	19	A4165 Banbury Rd NB to Cutteslowe Roundabout	328	338	335	335	367	391	374	363	348	676	371	356
	20	A4165 Banbury Rd / Oxford Rd NB Cutteslowe Roundabout to Park and Ride	234	257	259	257	243	268	266	269	240	267	264	266
	21	Oxford Rd NB Park and Ride to Kidlington Roundabout	92	94	94	94	92	94	94	91	90	90	90	91
A4260/A4165 NB	22	A4260 Oxford Rd NB Kidlington Roundabout to Bicester Rd	117	118	120	119	121	127	122	128	119	123	117	117
A4200/A4105 NB	23	A4260 Oxford Rd NB Bicester Rd to Yarnton Rd	56	59	60	58	66	70	65	64	68	68	63	63
	24	A4260 Oxford Rd NB Yarnton Rd to Langford Ln	225	242	247	233	279	327	274	317	268	288	293	276
	25	A4260 Banbury Rd NB Langford Ln to A4095	151	152	153	152	148	151	148	149	151	153	150	150
	26	A4260 Banbury Rb NB from A4095	119	121	125	124	123	122	124	123	118	115	120	122
	27	A4260 Banbury Rb SB to A4095	136	134	131	129	138	130	130	134	128	126	126	130
	28	A4260 Banbury Rd SB A4095 to Langford Ln	175	185	215	175	228	240	208	186	174	174	171	179
	29	A4260 Oxford Rd SB Langford Ln to Yarnton Rd	237	234	234	234	247	249	238	238	243	247	239	233
A 42CO / A 41CE CD	30	A4260 Oxford Road SB Yarnton Rd to Bicester Rd	77	78	72	72	80	78	76	76	73	78	73	72
A4260/A4165 SB	31	A4260 Oxford Rd SB Bicester Rd to Kidlington Roundabout	114	113	113	113	114	114	113	113	115	117	113	114
	32	Oxford Rd SB Kidlington Roundabout to Park and Ride	74	76	75	74	74	75	74	74	74	73	72	72
	33	A4165 Banbury Rd / Oxford Rd SB Park and Ride to Cutteslowe Roundabout	241	268	263	259	278	271	264	263	236	327	260	259
	34	A4165 Banbury Rd SB from Cutteslowe Roundabout	418	393	393	396	502	478	454	448	391	368	364	362
	35	A40 Eynsham Rd EB to Eynsham Roundabout	182	180	181	182	180	181	180	178	177	175	174	175
A40 EB	36	A40 Eynsham Rd EB Eynsham Roundabout to signals	115	115	115	115	110	110	110	111	111	111	110	110
	37	A40 EB Eynsham Rd to Wolvercote Roundabout	391	405	417	396	409	428	434	416	419	612	500	412
	38	A40 WB Wolvercote Roundabout to Eynsham Rd	250	249	250	251	249	246	245	250	249	250	249	248
A40 WB	39	A40 Eynsham Rd WB signals to Eynsham Roundabout	86	84	85	86	91	97	93	92	99	100	91	96
	40	A40 Eynsham Rd WB from Eynsham Roundabout	116	118	117	117	115	114	117	117	117	117	115	118

PM														
			-	15:00	-16:00			16:00	-17:00			17:00	-18:00	
Route		Section	Ref	DS Low	DS Core	DS High	Ref	DS Low	DS Core	DS High	Ref	DS Low	DS Core	DS High
	1	A4144 Woodstock Rd NB to Wolvercote Roundabout	369	383	378	377	373	385	385	383	394	401	399	394
	2	A44 Woodstock Rd NB Wolvercote Roundabout to Loop Farm Roundabout	148	165	155	153	172	188	186	175	175	195	182	172
	3	A44 Woodstock Rd NB Loop Farm Roundabout to Cassington Rd	78	81	81	80	82	83	82	82	86	85	83	83
	4	A44 Woodstock Rd NB Cassington Rd to Sandy Lane	87	116	116	115	97	119	118	119	100	121	119	122
A44/A4144 NB	5	A44 Woodstock Rd NB Sandy Lane to Begbroke HI	28	24	24	24	29	27	26	26	28	26	26	25
	6	A44 Woodstock Rd NB Begbroke HI to Spring Hill Rd	34	64	63	67	37	72	71	69	48	74	73	77
	7	A44 Woodstock Rd NB Spring Hill Rd to Langford Ln	55	56	56	55	55	55	55	55	57	57	58	57
	8	A44 Woodstock Rd NB Langford Ln to Bladon Roundabout	92	92	93	92	93	94	95	94	108	109	105	104
	9	A44 Woodstock Rd NB from Bladon Roundabout	102	102	102	104	103	102	104	104	106	105	107	105
	10	A44 Woodstock Rd SB to Bladon Roundabout	121	120	121	120	125	123	123	123	124	124	123	122
	11	A44 Woodstock Rd SB Bladon Roundabout to Langford Ln	77	77	78	77	79	77	77	77	79	77	78	77
	12	A44 Woodstock Rd SB Langford Ln to Spring Hill Rd	61	60	60	60	66	61	61	61	70	67	66	64
	13	A44 Woodstock Rd SB Spring Hill Rd to Begbroke HI	28	54	54	56	31	60	58	61	30	65	60	60
A44/A4144 SB	14	A44 Woodstock Rd SB Begbroke HI to Sandy Ln	37	52	50	48	43	84	76	85	45	105	87	68
	15	A44 Woodstock Rd SB Sandy Lane to Cassington Rd	63	104	88	85	68	298	249	235	70	710	735	683
	16	A44 Woodstock Rd SB Cassington Rd to Loop Farm Roundabout	92	95	94	94	97	122	124	126	97	121	126	121
	17	A44 Woodstock Rd SB Loop Farm Roundabout to Wolvercote Roundabout	179	184	183	189	190	194	198	191	180	195	185	185
	18	A4144 Woodstock Rd SB from Wolvercote Roundabout	338	360	366	360	563	593	591	584	345	375	371	369
	19	A4165 Banbury Rd NB to Cutteslowe Roundabout	352	362	359	358	354	372	368	368	360	393	378	371
	20	A4165 Banbury Rd / Oxford Rd NB Cutteslowe Roundabout to Park and Ride	249	274	273	272	261	288	285	286	264	294	291	290
	21	Oxford Rd NB Park and Ride to Kidlington Roundabout	94	96	94	93	97	98	97	98	100	100	101	100
A 42CO /A 41CE ND	22	A4260 Oxford Rd NB Kidlington Roundabout to Bicester Rd	114	114	117	112	117	119	122	116	121	124	125	122
A4260/A4165 NB	23	A4260 Oxford Rd NB Bicester Rd to Yarnton Rd	59	59	56	57	55	56	58	54	56	57	58	56
	24	A4260 Oxford Rd NB Yarnton Rd to Langford Ln	219	216	214	209	219	215	210	213	217	218	218	209
	25	A4260 Banbury Rd NB Langford Ln to A4095	154	149	153	155	148	151	152	147	148	145	150	148
	26	A4260 Banbury Rb NB from A4095	117	119	120	119	123	123	119	129	129	130	125	120
	27	A4260 Banbury Rb SB to A4095	122	120	121	122	132	126	128	128	125	129	124	128
	28	A4260 Banbury Rd SB A4095 to Langford Ln	166	164	161	166	167	164	170	169	168	164	170	167
	29	A4260 Oxford Rd SB Langford Ln to Yarnton Rd	231	235	231	234	237	242	245	241	246	250	245	246
	30	A4260 Oxford Road SB Yarnton Rd to Bicester Rd	70	70	72	71	70	73	74	75	69	78	78	81
A4260/A4165 SB	31	A4260 Oxford Rd SB Bicester Rd to Kidlington Roundabout	112	113	114	114	115	117	116	115	112	120	119	119
	32	Oxford Rd SB Kidlington Roundabout to Park and Ride	74	75	74	75	73	75	73	75	72	74	73	73
	33	A4165 Banbury Rd / Oxford Rd SB Park and Ride to Cutteslowe Roundabout	225	255	258	255	223	250	251	247	226	256	254	258
	34	A4165 Banbury Rd SB from Cutteslowe Roundabout	367	371	370	370	391	418	417	408	379	416	402	403
	35	A40 Eynsham Rd EB to Eynsham Roundabout	180	181	180	180	179	178	176	178	178	179	178	177
A40 EB	36	A40 Eynsham Rd EB Eynsham Roundabout to signals	114	114	114	114	112	111	111	112	109	109	110	109
	37	A40 EB Eynsham Rd to Wolvercote Roundabout	398	409	413	410	394	417	410	399	364	371	372	369
	38	A40 WB Wolvercote Roundabout to Eynsham Rd	244	242	245	245	238	241	242	240	241	243	242	243
A40 WB	39	A40 Eynsham Rd WB signals to Eynsham Roundabout	93	88	90	92	93	93	96	95	112	104	100	109
	40	A40 Eynsham Rd WB from Eynsham Roundabout	116	117	117	116	119	117	116	118	118	119	119	119





Oxford PR Sites VISSIM Assessment Modelling Outcomes Note Response

August 2023

Introduction

1. SLR has created this note to respond to the comments received on 14th August 2023 from Oxfordshire on the latest Oxford PR submission.

Response

2. The first query relates to Table 4.10 in the PR Sites OCC Modelling Outcomes Note. Oxfordshire commented:

"There are a lot of zeros in the table with development only having any impact at all on one arm."

SLR has checked Table 4.10 against the values in the model results spreadsheet and confirm that these average queue length changes are correct. Additionally comparing journey time changes on these approach arms corroborates with the queue impacts.

3. Secondly, for Table 4.12 Loop Farm roundabout queue lengths, Oxfordshire asked:

"Could some commentary be provided on what is happening here on the A44 NW approach, particularly in the last PM hour? The impact is most severe in the medium mode shift scenario, drops off a little in the high mode shift scenario but is less severe in the low mode shift scenario."

In each of the three DS scenarios, there are between 200 and 500 more trips per hour travelling from A44 NW to A44 South per hour compared to the Future Year Reference Case. Additionally, there are ~120 more trips travelling from A44 South to Frieze Way per hour which reduces the gaps for those from A44 NW. This increase in trips being required to give way from A44 NW is enough to result in the larger queues that are seen in the second and third peak hours. There are only ~500 trips travelling South to Frieze Way at Loop Farm in the first peak hour, compared to ~800 making this movement in the two latter hours, which is why queues build in the second peak and remain high throughout the last hour.

In regards to the final peak hour difference between the DS scenarios, the impact is less severe in the low mode shift scenario because there are slightly fewer modelled trips that travel from A44 South to Frieze Way and additionally slightly more trips from Frieze Way to A44 NW (which will help trips out from A44 NW). In each DS scenario, the overall routing and levels of delay change throughout the model and mean the arrival patterns of trips at each junction varies. The differences highlighted at Loop Farm are only ~20 trips, however they provide a few more gaps resulting in lower reported queues on the A44 NW. Journey times on the section between Cassington Roundabout and Loop Farm only differ by a maximum of 20s across the DS scenarios, demonstrating that generally the delays are relatively similar between the three scenarios.

4. The third query relates to bus journey times:

"Could some explanation be provided for how/why bus journey time are improving so much on the A4260 SB (AM) in the development scenarios? What is happening here to improve journey times."


The journey time improvements mentioned relate to the A4260/A4165 route detailed in the Bus Impact Note supplied by SLR, and the SB decreases in the AM are primarily on the A4165 sections. Banbury Road SB approach to, and away from Cutteslowe Roundabout improves due to fewer trips travelling to zones off here as a result of the mode shift assumptions introduced. For example, the Airport P&R adjustments mean there is a reduction of ~200-400 trips per hour travelling from north of the airport to A4144/A4165 South. Additionally, particularly in the second peak hour for DS Core and High mode shift assumptions, journey times improve on A4260 SB approach to Langford Lane because of the same mode shift assumptions reducing trips from north to south.


5. Finally, Oxfordshire commented on the results for Cutteslowe Roundabout, requesting further explanations for the AM:

"The results here have been unexpected, with queue lengths in the AM decreasing quite significantly on the N and E arms. There is some explanation in table 4.3.21 which states this is a result of a reduction of southbound movements. Could this explanation be expanded on? Perhaps some form of visualisation might be useful"

After investigating the modelled turn counts, it appears the significant queue length reduction on the north and east arms is primarily a result of ~100 fewer trips travelling west to south per hour. As mentioned in point 4 above, the Airport P&R mode shift adjustments mean there is a reduction of ~200-400 trips per hour travelling north of the Airport to A4144/A4165 South. In particular, ~100 of these trips are from A44/A4095 North to B4495 South which are likely to have previously traversed west to south at Cutteslowe. Similarly, bus mode shift adjustments mean ~50 fewer vehicles per hour on the A44 SB corridor, some of which would have crossed Cutteslowe to reach the A4165. The A4165 southbound away from Cutteslowe towards Central Oxford is slow moving for a combination of reasons, including the exit merge immediately off Cutteslowe as well as the presence of pedestrian crossings and bus stops along the corridor. The Core DS scenario exhibits a journey time reduction of approximately 1 minute (~10%) compared with the Reference; this reduces the occurrences of southbound blocking into Cutteslowe which can affect throughput from the east and north approaches in the Reference Case.

To help visualise the issue we have produced a heat map for the Future Year Reference Case and Future Year DS Core, focussing on Cutteslowe Roundabout and specifically the southbound link to Marston Ferry Road. While both show equally slow speeds for the majority of the corridor, speeds at the very south in the DS Core scenario show minor improvements, which will be propagating back in the form of improved journey times along the corridor as a whole. It is also worth noting that much of the delay from the eastbound and southbound approaches to Cutteslowe is cleared but will be shifted onto this southbound link between Cutteslowe and Marston Ferry Road. It is these approaches therefore that feel the majority of the benefit as the improvements on the southbound towards Oxford induces demand that it could not previously accommodate. Heat maps are provided below.



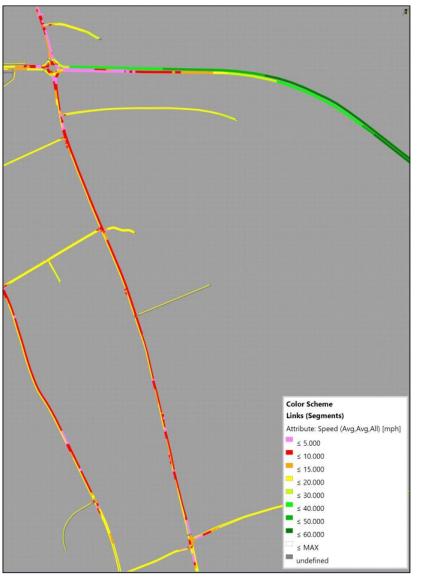

AM Future Year DS Core





Oxford PR Sites VISSIM Assessment Bus Impact Note Addendum

September 2023

Introduction


- 1. This Note accompanies the Bus Impact Note issued on 2nd August 2023.
- 2. Two further tests have been undertaken and involve the addition of bus lanes to the DS scenarios. These tests have been assessed in all three mode shift scenarios (Low, Core, and High).
- 3. An analysis of the bus journey times along key routes across the model extent are given in the following sections. The corresponding journey times for private vehicles are also given for comparison. The full breakdown of the journey times along the sections making up the routes presented in Table 1, Table 2, Table 3 and Table 4 can be found in Appendix A and Appendix B for buses and private vehicles respectively, at the end of this document.

Bus Lane Test Scenarios

- 4. The two bus lane tests are:
 - a. A southbound bus lane added between the A44/Sandy Lane/Rutten Lane Roundabout and Cassington Road Roundabout.
 - b. Above, plus a northbound bus lane added on the approach to the A44/Sandy Lane/Rutten Lane Roundabout.
- 5. The model coding for Scenario A (SB only bus lane), and Scenario B (NB + SB bus lanes), is shown overleaf in Figure 1. The bus lane sections are highlighted in red.



Figure 1: Bus Lane Set-Up in VISSIM

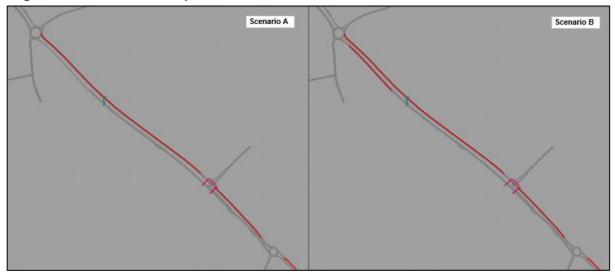

AM Peak Results – Bus Only

6. The Table overleaf shows the **bus** journey time differences along the three main corridors in the model covered by bus routes, namely the A44/A4144 NB/SB, A4260/A4165 NB/SB, and A40 EB/WB. Each scenario has been compared to the 2031 Reference Case for the relevant time period and demonstrates the bus only journey time change.

₩SLR

				0	7:00-08:0	0			
Route	Lo	w Mode S	hift	Co	re Mode S	Shift	Hig	h Mode S	Shift
	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB
A44/A4144 NB	138	131	110	129	131	109	118	135	102
A44/A4144 SB	215	104	122	160	83	82	97	62	59
A4260/A4165 NB	58	42	44	71	57	38	50	26	45
A4260/A4165 SB	9	10	-2	24	-18	4	-18	-17	-6
A40 EB	10	7	2	25	4	4	5	9	10
A40 WB	-1	-5	2	0	-5	0	2	-2	-3
				0	8:00-09:0	0			
Route	Lov	w Mode S	hift	Co	re Mode S	Shift	Hig	h Mode S	Shift
	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB
A44/A4144 NB	224	134	161	226	145	132	145	125	91
A44/A4144 SB	490	135	186	371	147	117	226	44	55
A4260/A4165 NB	112	79	56	29	41	49	67	23	33
A4260/A4165 SB	-27	-58	-47	-105	-126	-91	-129	-149	-118
A40 EB	20	3	56	25	-10	-9	6	-15	-4
A40 WB	3	0	1	1	-1	8	4	3	10
				0	9:00-10:0	0	_		
Route	Lov	w Mode S	hift	Co	re Mode S	Shift	Hig	Shift	
	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB
A44/A4144 NB	376	181	211	217	121	134	130	114	95
A44/A4144 SB	529	180	218	555	255	214	192	94	111
A4260/A4165 NB	379	403	312	67	47	165	38	-4	38
A4260/A4165 SB	75	135	132	-16	-19	-13	-14	-15	0
A40 EB	191	92	264	77	-16	-26	-10	-28	-32
A40 WB	1	0	0	-9	-2	-1	-3	-4	0

Table 1: AM Bus Journey Time Changes (seconds) in Comparison to Ref

- 7. Results show that the addition of the southbound bus lane results in bus journey time improvements on the A44/A144 SB and NB routes. The main journey time saving on the A44 SB is between Sandy Lane and Cassington Road roundabouts, where the new bus lane is located. The individual journey time sections along this route demonstrate that some delay is shifted north of the Sandy Lane roundabout as private vehicles lose the second lane between Sandy Lane and Cassington. Overall however, the southbound buses show a considerable net reduction in journey times compared to the original DS scenarios.
- 8. The A44/A144 NB route also improves in Scenario A for buses, primarily on the northbound section between Cassington Lane and Sandy Lane. This appears to be because vehicles on the A44 northbound approach to Sandy Lane are slightly less hesitant due to fewer lane changes on the roundabout when private vehicles can only use the one lane to exit southbound. Furthermore, delays on the southbound approach to the roundabout have increased (due to private vehicles losing a lane to the bus lane), which reduces throughput north to south at Sandy Lane meaning fewer trips and more gap opportunities for vehicles travelling northbound.
- 9. When the northbound bus lane section is added in Scenario B, the A44 northbound generally shows additional journey time reductions as the buses are able to bypass the queues on the approach to Sandy Lane roundabout. It is demonstrated in the individual journey time sections in Appendix A that instances where the northbound route has higher journey times in ScB compared with ScA are because of small journey time variations elsewhere; A44 northbound to Sandy Lane improves in all B scenarios compared to A.

尜SLR

PM Peak Results – Bus Only

10. The Table below displays the **bus** journey time changes compared to the Reference Case for the PM peak.

				1	5:00-16:0	0			
Route	Lo	w Mode S	hift	Co	re Mode S	Shift	Hig	h Mode S	hift
	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB
A44/A4144 NB	91	88	79	75	75	69	74	73	69
A44/A4144 SB	110	98	85	99	81	95	93	82	90
A4260/A4165 NB	30	34	32	27	16	27	16	19	15
A4260/A4165 SB	36	32	36	34	35	28	38	32	34
A40 EB	12	14	12	15	25	18	11	7	22
A40 WB	-5	-3	-1	-1	-2	2	0	0	-4
				1	6:00-17:0	0			
Route	Lo	w Mode S	hift	Co	re Mode S	Shift	Hig	h Mode S	hift
	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB
A44/A4144 NB	84	66	78	80	72	70	65	68	49
A44/A4144 SB	352	156	172	297	171	153	284	144	168
A4260/A4165 NB	48	43	58	37	43	37	38	45	23
A4260/A4165 SB	57	49	61	66	60	54	50	39	40
A40 EB	21	22	26	12	17	17	4	5	4
A40 WB	1	-4	5	4	-3	-1	3	3	0
				1	7:00-18:0	0			
Route	Lo	w Mode S	hift	Co	re Mode S	Shift	Hig	h Mode S	hift
	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB
A44/A4144 NB	72	46	68	51	47	48	39	31	32
A44/A4144 SB	799	233	279	790	266	227	711	207	207
A4260/A4165 NB	68	63	73	53	39	47	22	31	25
A4260/A4165 SB	91	75	63	69	55	62	79	59	52
A40 EB	9	11	13	9	7	9	5	9	13
A40 WB	-4	-1	-7	-10	-13	-7	1	-4	-4

尜SLR

- 11. Like the AM, the addition of the southbound bus lane means bus journey times improve in Scenarios A and B on the A44/A4144 NB and SB. The southbound journey times reduce significantly in the third peak hour, with time savings of over 8 minutes in all mode shift scenarios compared to each original DS. These improvements are focused on the bus lane section between Sandy Lane and Cassington Road. Similar to the AM, there are some delay shifts just north of Sandy Lane roundabout as private vehicles lose stacking space on the approach to Cassington.
- 12. Bus journey time reductions are observed on A44 northbound to Sandy Lane in both Scenario A and Scenario B compared to the original DS. These are a result of the same reasons as mentioned for the AM. Scenario B does not show as much additional journey time saving on average over Scenario A in the PM as it does in the AM. This is because delays on the northbound approach to Sandy Lane are not as significant in the PM, and so there is limited benefit to be had from the northbound bus lane.

AM Peak Results – Private Vehicles Only

13. The Table overleaf shows the **private vehicle** journey time differences along the three main corridors in the model covered by bus routes, namely the A44/A4144 NB/SB, A4260/A4165 NB/SB, and A40 EB/WB. Each scenario has been compared to the 2031 Reference Case for the relevant time period and demonstrates the private vehicle only journey time change.

₩SLR

				0	7:00-08:0	0			
Route	Lo	w Mode S	hift	Co	re Mode S	Shift	Hig	h Mode S	Shift
	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB
A44/A4144 NB	85	73	67	58	63	49	64	66	51
A44/A4144 SB	136	166	158	108	110	104	53	71	85
A4260/A4165 NB	36	34	34	51	16	21	29	13	21
A4260/A4165 SB	-36	-23	-26	-25	-42	-33	-48	-63	-40
A40 EB	36	21	24	62	10	9	15	10	11
A40 WB	-1	-2	5	-6	-7	-1	3	-4	4
				0	8:00-09:0	0			
Route	Lo	w Mode S	hift	Co	re Mode S	Shift	Hig	h Mode S	Shift
	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB
A44/A4144 NB	193	97	167	193	120	97	68	68	35
A44/A4144 SB	457	384	407	269	320	240	171	158	204
A4260/A4165 NB	101	107	58	43	41	70	47	14	33
A4260/A4165 SB	-220	-259	-138	-207	-301	-140	-261	-246	-188
A40 EB	47	21	127	34	-26	-16	2	-27	-15
A40 WB	-16	-16	-9	-21	-15	-12	-17	-17	-15
				0	9:00-10:0	0			
Route	Lo	w Mode S	hift	Co	re Mode S	Shift	Hig	h Mode S	Shift
	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB
A44/A4144 NB	441	174	211	239	99	97	80	58	58
A44/A4144 SB	326	131	212	462	278	264	70	60	104
A4260/A4165 NB	387	447	295	62	29	208	29	-7	27
A4260/A4165 SB	91	134	204	9	-45	5	-45	-41	-28
A40 EB	454	170	530	186	-26	-34	-11	-34	-32
A40 WB	-4	-7	1	-21	-12	-15	-14	-9	-14

Table 3: AM Private Vehicle Journey Time Changes (seconds) in Comparison to Ref

- 14. Like the journey time results for bus only, private vehicle journey times generally decrease on the A44/A144 SB and NB routes when the southbound bus lane is added, particularly in the 09:00-10:00 hour. SB Journey time savings are predominantly on the approach to Cassington. Although private vehicles lose a lane to the bus lane between Sandy Lane and Cassington, delays reduce due to vehicles already being in one lane on the approach to Cassington and so find it easier to merge across. Some of this delay has shifted north of the Sandy Lane roundabout however, where journey time increases are seen back to Spring Hill Road.
- 15. Improvements on the A44/A144 NB route that are observed in both Scenarios A and B are primarily on the northbound section between Cassington and Sandy Lane. The same explanation stands for the private vehicle journey time reductions as for the bus reductions: vehicles on the A44 northbound to Sandy Lane are less hesitant due to fewer lane changes on the roundabout when private vehicles can only use one lane to exit southbound. Additionally, the southbound delay increases seen on the approach to the Sandy Lane roundabout mean throughput north to south at Sandy Lane is reduced and there are more gap opportunities for vehicles travelling northbound. The addition of the NB bus lane in Scenario B has minimal impact on private vehicles as this bus lane is input as an extra lane so private vehicles do not lose any space.

PM Peak Results – Private Vehicles Only

16. The Table below displays the **private vehicle** journey time changes compared to the Reference Case for the PM peak.

				1	5:00-16:0	0			
Route	Lo	w Mode S	hift	Co	re Mode S	Shift	Hig	h Mode S	hift
	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB
A44/A4144 NB	30	27	19	24	16	6	10	8	2
A44/A4144 SB	73	69	86	52	83	73	65	66	72
A4260/A4165 NB	18	13	18	20	10	16	-6	-2	3
A4260/A4165 SB	50	43	43	46	39	42	37	41	36
A40 EB	12	18	9	26	31	28	18	28	31
A40 WB	6	13	10	10	3	7	9	7	5
				1	6:00-17:0	0			
Route	Lo	w Mode S	hift	Co	re Mode S	Shift	Hig	h Mode S	hift
	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB
A44/A4144 NB	50	34	46	37	25	25	17	9	8
A44/A4144 SB	276	241	268	247	255	244	228	208	219
A4260/A4165 NB	27	27	42	34	32	24	11	19	7
A4260/A4165 SB	98	102	95	94	63	88	63	48	52
A40 EB	13	22	42	13	12	18	2	11	1
A40 WB	-1	11	-3	5	-6	1	7	2	-3
				1	7:00-18:0	0			
Route	Lo	w Mode S	hift	Co	re Mode S	Shift	Hig	h Mode S	hift
	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB	DS	DS ScA	DS ScB
A44/A4144 NB	68	26	61	27	26	24	13	3	11
A44/A4144 SB	814	475	549	767	524	509	743	489	465
A4260/A4165 NB	70	70	78	59	49	60	45	46	22
A4260/A4165 SB	131	108	102	113	79	81	125	66	69
A40 EB	9	12	31	9	7	8	8	8	5
A40 WB	2	11	0	9	6	5	12	13	3

- 17. Similar to the bus only journey times, in the PM the addition of the southbound bus lane means private vehicle journey times improve in Scenarios A and B on the A44/A4144 NB and SB. In the third peak hour, journey times on the A44 SB decrease by ~4-6 minutes compared to the original DS scenarios. Like the AM, the journey time savings are focused on the section between Sandy Lane and Cassington roundabouts due to fewer delays caused by vehicles merging into one lane at Cassington, while some journey time increases are observed just north of Sandy Lane roundabout as private vehicles have lost stacking space on the approach to Cassington.
- 18. Private vehicle journey time reductions on A44 northbound are not as significant as they are for the AM, due to lower levels of delay on the northbound approach to Sandy Lane roundabout in the PM.



Appendix A

Bus Journey Times by Section

AM Bus Only																		me (Seconds)														
							07:00	-08:00									08:00	0.09:00									09:00	-10:00				
Route		Section	Ref	DS Low	DS Low SB Bus	DS Low NB + SB Bus	DS Core	DS Core SB Bus	DS Core NB + SB Bus	DS High	DS High SB Bus	DS High NB + SB Bus	Ref	DS Low	DS Low SB Bus	DS Low NB + SB Bus	DS Core	DS Core SB Bus	B DS Core NB + SB Bus	DS High	DS High SB Bus	DS High NB + SB Bus	Ref	DS Low	DS Low SB Bus	DS Low NB + SB Bus	DS Core	DS Core SB Bus	DS Core NB + SB Bus	DS High	DS High SB Bus	DS High NB + SB Bus
	1	A4144 Woodstock Rd NB to Wolvercote Roundabout	368	382	385	383	385	389	385	382	387	384	361	383	381	383	381	388	381	376	389	376	367	390	386	385	383	393	384	379	390	381
	2	A44 Woodstock Rd NB Wolvercote Roundabout to Loop Farm Roundabout	146	176	178	172	177	170	169	169	170	164	166	196	195	228	212	183	182	177	175	174	163	258	248	271	200	180	180	173	178	173
	3	A44 Woodstock Rd NB Loop Farm Roundabout to Cassington Rd	80	89	88	89	87	88	88	87	89	88	85	93	93	96	93	90	89	90	90	89	80	86	84	87	83	82	81	85	82	83
A44/A4144	4	A44 Woodstock Rd NB Cassington Rd to Sandy Lane	93	142	124	108	127	126	110	129	128	109	109	230	135	114	215	141	121	175	136	112	95	272	128	115	196	131	122	159	128	111
1444/144144	5	A44 Woodstock Rd NB Sandy Lane to Begbroke HI	27	32	34	35	34	33	36	35	40	38	29	40	47	56	46	62	79	48	50	59	28	68	32	44	55	36	64	34	38	41
IND	6	A44 Woodstock Rd NB Begbroke HI to Spring Hill Rd	33	59	61	62	60	65	63	56	63	61	37	69	68	70	66	66	65	64	71	66	33	64	65	69	65	63	62	62	64	65
	7	A44 Woodstock Rd NB Spring Hill Rd to Langford Ln	55	56	56	56	56	56	56	56	56	56	56	56	57	57	56	56	57	55	56	56	54	56	56	56	55	55	56	56	55	56
	8	A44 Woodstock Rd NB Langford Ln to Bladon Roundabout	90	93	93	93	93	95	93	94	93	93	92	93	93	92	93	93	93	94	94	92	92	93	92	93	92	92	92	92	92	93
	9	A44 Woodstock Rd NB from Bladon Roundabout	99	102	102	102	101	100	100	101	100	101	102	101	102	102	102	102	103	102	101	102	102	104	103	104	102	102	105	103	102	105
	10	A44 Woodstock Rd SB to Bladon Roundabout	130	128	127	127	126	127	126	128	127	128	128	126	127	127	126	127	127	124	124	124	125	125	124	124	124	124	124	124	123	124
	11	A44 Woodstock Rd SB Bladon Roundabout to Langford Ln	79	79	78	79	78	79	78	79	78	78	82	80	79	80	79	79	79	78	79	79	78	78	78	78	79	78	78	78	78	78
	12	A44 Woodstock Rd SB Langford Ln to Spring Hill Rd	93	72	74	71	68	74	72	71	71	70	119	82	76	85	74	79	75	72	76	71	63	66	65	66	67	72	68	66	64	63
A44/A4144	13	A44 Woodstock Rd SB Spring Hill Rd to Begbroke HI	27	76	94	99	80	77	77	72	77	70	30	78	102	121	72	127	93	76	81	78	26	75	91	128	78	192	116	73	82	74
1044/J04144	14	A44 Woodstock Rd SB Begbroke HI to Sandy Ln	41	77	91	94	67	77	83	66	72	72	62	82	119	118	73	114	107	81	98	102	41	55	64	75	63	81	73	60	62	61
30	15	A44 Woodstock Rd SB Sandy Lane to Cassington Rd	70	225	82	81	181	82	81	128	80	80	71	484	82	86	404	84	83	262	84	84	90	436	84	85	414	81	82	187	77	78
	16	A44 Woodstock Rd SB Cassington Rd to Loop Farm Roundabout	95	94	94	94	97	95	94	93	93	94	97	102	99	100	98	96	100	96	94	95	106	130	121	126	129	103	114	102	99	105
	17	A44 Woodstock Rd SB Loop Farm Roundabout to Wolvercote Roundabout	157	163	165	164	163	164	161	160	162	160	215	255	233	260	239	233	244	224	198	214	249	335	320	310	375	290	330	274	278	299
	18	A4144 Woodstock Rd SB from Wolvercote Roundabout	399	394	391	404	391	399	400	392	393	398	578	583	600	591	588	591	593	594	592	590	367	375	380	371	373	379	376	374	377	375
	19	A4165 Banbury Rd NB to Cutteslowe Roundabout	328	338	336	339	335	330	334	335	328	332	367	391	396	382	374	363	381	363	354	361	348	676	689	631	371	371	439	356	343	353
	20	A4165 Banbury Rd / Oxford Rd NB Cutteslowe Roundabout to Park and Ride	234	257	260	259	259	259	258	257	258	257	243	268	265	265	266	271	270	269	271	270	240	267	268	265	264	267	264	266	263	264
	21	Oxford Rd NB Park and Ride to Kidlington Roundabout	92	94	93	93	94	94	96	94	94	94	92	94	92	94	94	92	91	91	94	92	90	90	93	92	90	90	90	91	91	91
A4260/A416	22	A4260 Oxford Rd NB Kidlington Roundabout to Bicester Rd	117	118	117	118	120	117	115	119	119	118	121	127	126	121	122	126	126	128	124	123	119	123	127	125	117	115	118	117	116	118
NB	23	A4260 Oxford Rd NB Bicester Rd to Yarnton Rd	56	59	57	57	60	58	58	58	55	58	66	70	68	70	65	64	66	64	67	65	68	68	69	68	63	64	65	63	63	63
	24	A4260 Oxford Rd NB Yarnton Rd to Langford Ln	225	242	232	229	247	244	233	233	228	233	279	327	310	290	274	296	283	317	282	290	268	288	294	265	293	269	316	276	252	279
	25	A4260 Banbury Rd NB Langford Ln to A4095	151	152	152	148	153	153	152	152	149	153	148	151	144	152	148	149	149	149	147	151	151	153	148	150	150	150	148	150	150	148
	26	A4260 Banbury Rb NB from A4095	119	121	118	122	125	125	116	124	118	123	123	122	115	120	124	118	121	123	122	118	118	115	116	117	120	121	125	122	118	123
	27	A4260 Banbury Rb SB to A4095	136	134	134	134	131	131	131	129	129	129	138	130	130	131	130	130	130	134	134	133	128	126	127	127	126	124	124	130	131	132
	28	A4260 Banbury Rd SB A4095 to Langford Ln	175	185	173	170	215	169	183	175	171	172	228	240	207	211	208	197	213	186	177	203	174	174	187	173	171	169	179	179	171	180
	29	A4260 Oxford Rd SB Langford Ln to Yarnton Rd	237	234	238	236	234	232	234	234	231	234	247	249	243	245	238	233	235	238	237	238	243	247	241	247	239	238	237	233	237	237
A4260/A416	30	A4260 Oxford Road SB Yarnton Rd to Bicester Rd	77	78	75	74	72	72	72	72	74	75	80	78	80	79	76	76	76	76	76	78	73	78	82	82	73	73	70	72	73	75
SB	31	A4260 Oxford Rd SB Bicester Rd to Kidlington Roundabout	114	113	113	114	113	112	112	113	113	114	114	114	114	114	113	113	113	113	112	113	115	117	119	122	113	113	113	114	114	114
	32	Oxford Rd SB Kidlington Roundabout to Park and Ride	74	76	74	75	75	75	75	74	75	75	74	75	73	74	74	74	74	74	74	74	74	73	77	80	72	73	72	72	72	72
	33	A4165 Banbury Rd / Oxford Rd SB Park and Ride to Cutteslowe Roundabout	241	268	265	266	263	264	264	259	262	264	278	271	272	275	264	266	269	263	262	265	236	327	363	354	260	259	261	259	258	259
	34	A4165 Banbury Rd SB from Cutteslowe Roundabout	418	393	410	401	393	399	404	396	400	404	502	478	483	487	454	447	461	448	440	439	391	368	373	381	364	365	365	362	363	366
	35	A40 Eynsham Rd EB to Eynsham Roundabout	182	180	180	182	181	182	181	182	180	181	180	181	182	181	180	179	180	178	178	178	177	175	174	175	174	174	173	175	174	173
A40 EB	36	A40 Eynsham Rd EB Eynsham Roundabout to signals	115	115	115	116	115	115	115	115	116	116	110	110	110	109	110	110	110	111	110	110	111	111	110	110	110	111	111	110	110	110
1	37	A40 EB Eynsham Rd to Wolvercote Roundabout	391	405	401	394	417	395	397	396	402	401	409	428	409	464	434	399	400	416	395	405	419	612	515	686	500	405	397	412	394	392
	38	A40 WB Wolvercote Roundabout to Eynsham Rd	250	249	248	251	250	248	253	251	249	247	249	246	248	246	245	245	249	250	249	250	249	250	250	248	249	251	252	248	248	250
A40 WB	39	A40 Eynsham Rd WB signals to Eynsham Roundabout	86	84	84	85	85	84	85	86	86	85	91	97	91	96	93	91	99	92	92	96	99	100	97	98	91	95	96	96	95	98
1	40	A40 Eynsham Rd WB from Eynsham Roundabout	116	118	115	119	117	116	115	117	116	117	115	114	116	114	117	118	115	117	117	118	117	117	118	118	115	117	116	118	118	117

PM Bus Only																	Journey Ti	me (Seconds)													
							15:00	-16:00									16:0	0-17:00									17:0	0-18:00				
Route		Section	Ref	DS Low	DS Low SB Bus	DS Low NB + SB Bus	DS Core	DS Core SB Bus	DS Core NB + SB Bus	DS High	DS High SB Bus	DS High NB + SB Bus	Ref	DS Low	DS Low SB Bus	DS Low NB + SB Bus	DS Core	DS Core SI Bus	B DS Core NB + SB Bus	DS High	DS High SB Bus	DS High NB + SB Bus	Ref	DS Low	DS Low SB Bus	DS Low NB + SB Bus	DS Core	DS Core SB Bus	DS Core NB + SB Bus	DS High	DS High SB Bus	DS High NB + SB Bus
	1	A4144 Woodstock Rd NB to Wolvercote Roundabout	369	383	380	381	378	377	378	377	376	378	373	385	384	383	385	386	385	383	383	382	394	401	401	401	399	397	400	394	395	395
	2	A44 Woodstock Rd NB Wolvercote Roundabout to Loop Farm Roundabout	148	165	162	159	155	155	153	153	156	155	172	188	179	196	186	178	191	175	181	175	175	195	185	209	182	191	193	172	178	181
	3	A44 Woodstock Rd NB Loop Farm Roundabout to Cassington Rd	78	81	80	80	81	82	82	80	81	81	82	83	83	83	82	83	83	82	81	81	86	85	85	85	83	84	84	83	83	83
A44/A4144	4	A44 Woodstock Rd NB Cassington Rd to Sandy Lane	87	116	112	108	116	113	109	115	112	108	97	119	115	109	118	112	108	119	113	106	100	121	117	108	119	116	108	122	116	108
2444/204144	5	A44 Woodstock Rd NB Sandy Lane to Begbroke HI	28	24	25	25	24	25	24	24	24	25	29	27	28	28	26	27	27	26	28	27	28	26	26	29	26	26	28	25	25	29
IND	6	A44 Woodstock Rd NB Begbroke HI to Spring Hill Rd	34	64	71	67	63	64	63	67	65	62	37	72	65	68	71	73	67	69	67	68	48	74	72	73	73	73	70	77	72	72
	7	A44 Woodstock Rd NB Spring Hill Rd to Langford Ln	55	56	55	56	56	56	56	55	55	56	55	55	56	56	55	56	55	55	56	55	57	57	56	57	58	56	57	57	56	56
	8	A44 Woodstock Rd NB Langford Ln to Bladon Roundabout	92	92	91	93	93	93	93	92	93	93	93	94	95	94	95	95	94	94	96	94	108	109	99	101	105	99	104	104	99	104
	9	A44 Woodstock Rd NB from Bladon Roundabout	102	102	103	103	102	103	103	104	104	104	103	102	103	103	104	104	102	104	103	103	106	105	106	105	107	105	105	105	106	105
	10	A44 Woodstock Rd SB to Bladon Roundabout	121	120	121	121	121	122	121	120	120	120	125	123	123	123	123	123	123	123	124	124	124	124	124	124	123	123	124	122	123	122
	11	A44 Woodstock Rd SB Bladon Roundabout to Langford Ln	77	77	78	77	78	77	77	77	77	77	79	77	78	77	77	77	77	77	77	77	79	77	77	77	78	77	77	77	77	77
	12	A44 Woodstock Rd SB Langford Ln to Spring Hill Rd	61	60	61	59	60	60	59	60	60	59	66	61	63	60	61	64	61	61	62	62	70	67	64	64	66	61	61	64	61	63
A44/A4144	13	A44 Woodstock Rd SB Spring Hill Rd to Begbroke HI	28	54	56	54	54	56	57	56	54	57	31	60	73	72	58	86	71	61	63	87	30	65	117	152	60	142	115	60	101	94
F0	14	A44 Woodstock Rd SB Begbroke HI to Sandy Ln	37	52	53	56	50	54	58	48	53	51	43	84	102	111	76	105	108	85	101	107	45	105	137	135	87	140	127	68	133	130
30	15	A44 Woodstock Rd SB Sandy Lane to Cassington Rd	63	104	73	75	88	73	75	85	73	74	68	298	80	82	249	82	81	235	80	81	70	710	84	82	735	85	84	683	80	82
	16	A44 Woodstock Rd SB Cassington Rd to Loop Farm Roundabout	92	95	95	95	94	95	94	94	94	94	97	122	114	121	124	123	121	126	126	123	97	121	105	117	126	116	117	121	115	117
	17	A44 Woodstock Rd SB Loop Farm Roundabout to Wolvercote Roundabout	179	184	187	184	183	177	185	189	185	182	190	194	194	199	198	191	189	191	190	184	180	195	186	190	185	182	185	185	179	183
	18	A4144 Woodstock Rd SB from Wolvercote Roundabout	338	360	369	361	366	363	365	360	363	373	563	593	590	587	591	579	582	584	583	585	345	375	379	378	371	380	377	369	378	378
	19	A4165 Banbury Rd NB to Cutteslowe Roundabout	352	362	360	360	359	358	364	358	358	359	354	372	371	378	368	364	370	368	367	363	360	393	391	396	378	370	382	371	376	371
	20	A4165 Banbury Rd / Oxford Rd NB Cutteslowe Roundabout to Park and Ride	249	274	275	276	273	272	274	272	272	272	261	288	291	291	285	287	284	286	286	287	264	294	298	296	291	292	296	290	290	288
	21	Oxford Rd NB Park and Ride to Kidlington Roundabout	94	96	97	94	94	94	94	93	95	95	97	98	99	100	97	98	97	98	98	98	100	100	99	98	101	100	100	100	98	99
A4260/A4165	22	A4260 Oxford Rd NB Kidlington Roundabout to Bicester Rd	114	114	116	116	117	113	113	112	117	117	117	119	116	118	122	121	117	116	117	119	121	124	125	126	125	124	119	122	121	122
NB	23	A4260 Oxford Rd NB Bicester Rd to Yarnton Rd	59	59	58	57	56	57	57	57	58	58	55	56	55	56	58	55	55	54	56	55	56	57	56	60	58	55	58	56	57	56
	24	A4260 Oxford Rd NB Yarnton Rd to Langford Ln	219	216	214	216	214	214	216	209	213	207	219	215	213	217	210	216	214	213	213	207	217	218	217	222	218	218	215	209	209	214
	25	A4260 Banbury Rd NB Langford Ln to A4095	154	149	152	150	153	152	152	155	150	151	148	151	150	151	152	151	149	147	149	148	148	145	148	146	150	147	146	148	149	147
	26	A4260 Banbury Rb NB from A4095	117	119	120	120	120	115	116	119	114	115	123	123	122	123	119	125	125	129	133	120	129	130	124	122	125	127	124	120	125	122
	27	A4260 Banbury Rb SB to A4095	122	120	120	120	121	121	121	122	121	121	132	126	126	126	128	129	129	128	126	126	125	129	128	128	124	124	126	128	129	129
	28	A4260 Banbury Rd SB A4095 to Langford Ln	166	164	162	167	161	167	164	166	162	166	167	164	162	169	170	171	167	169	164	169	168	164	164	167	170	167	169	167	166	166
	29	A4260 Oxford Rd SB Langford Ln to Yarnton Rd	231	235	236	237	231	233	230	234	233	235	237	242	236	238	245	245	240	241	241	238	246	250	247	248	245	243	246	246	247	242
A4260/A4165	30	A4260 Oxford Road SB Yarnton Rd to Bicester Rd	70	70	71	71	72	70	70	71	71	71	70	73	71	73	74	73	74	75	73	73	69	78	75	75	78	78	75	81	75	74
SB	31	A4260 Oxford Rd SB Bicester Rd to Kidlington Roundabout	112	113	114	114	114	113	114	114	113	113	115	117	117	117	116	115	116	115	117	116	112	120	118	118	119	117	117	119	118	117
	32	Oxford Rd SB Kidlington Roundabout to Park and Ride	74	75	74	74	74	73	74	75	75	74	73	75	74	73	73	74	74	75	74	73	72	74	73	72	73	73	73	73	73	73
	33	A4165 Banbury Rd / Oxford Rd SB Park and Ride to Cutteslowe Roundabout	225	255	253	254	258	254	252	255	254	253	223	250	250	252	251	250	249	247	248	250	226	256	256	253	254	257	255	258	255	257
	34	A4165 Banbury Rd SB from Cutteslowe Roundabout	367	371	369	367	370	371	371	370	371	368	391	418	421	420	417	411	413	408	403	402	379	416	410	398	402	393	399	403	392	390
	35	A40 Eynsham Rd EB to Eynsham Roundabout	180	181	180	181	180	182	180	180	182	184	179	178	179	178	176	177	179	178	180	177	178	179	180	179	178	177	179	177	178	178
A40 EB	36	A40 Eynsham Rd EB Eynsham Roundabout to signals	114	114	113	114	114	114	114	114	114	114	112	111	111	112	111	111	112	112	112	111	109	109	109	109	110	109	110	109	110	109
	37	A40 EB Eynsham Rd to Wolvercote Roundabout	398	409	413	409	413	421	416	410	404	416	394	417	417	422	410	414	411	399	398	400	364	371	373	376	372	371	372	369	373	377
	38	A40 WB Wolvercote Roundabout to Eynsham Rd	244	242	244	244	245	245	247	245	243	243	238	241	239	243	242	238	239	240	241	241	241	243	245	245	242	241	242	243	243	242
A40 WB	39	A40 Eynsham Rd WB signals to Eynsham Roundabout	93	88	90	90	90	91	90	92	93	91	93	93	92	94	96	94	94	95	95	89	112	104	106	99	100	100	104	109	107	106
	40	A40 Eynsham Rd WB from Eynsham Roundabout	116	117	115	117	117	116	119	116	116	115	119	117	115	117	116	115	116	118	117	119	118	119	119	119	119	117	118	119	118	119





Appendix B

Private Vehicle Journey Times by Section

AM Private Vo	hicles Only																	ne (Seconds)														
							07:00	-08:00									08:00	-09:00									09:0	0-10:00				
Route		Section	Ref	DS Low	DS Low SB Bus	DS Low NB + SB Bus	DS Core	DS Core SB Bus	DS Core NB + SB Bus	DS High	DS High SB Bus	DS High NB + SB Bus	Ref	DS Low	DS Low SB Bus	DS Low NB + SB Bus	DS Core	DS Core SB Bus	DS Core NB + SB Bus	DS High	DS High SB Bus	DS High NB + SB Bus	Ref	DS Low	DS Low SB Bus	+ SB Bus		DS Core SB Bus	DS Core NB + SB Bus	DS High	DS High SB Bus	DS High NB + SB Bus
	1	A4144 Woodstock Rd NB to Wolvercote Roundabout	345	356	355	353	347	357	349	348	358	347	353	369	358	360	358	376	360	346	368	344	347	363	360	354	357	372	356	353	369	352
	2	A44 Woodstock Rd NB Wolvercote Roundabout to Loop Farm Roundabout	148	171	170	169	166	160	161	163	157	161	181	233	231	279	263	221	205	193	193	189	189	324	304	334	261	212	200	189	185	179
	3	A44 Woodstock Rd NB Loop Farm Roundabout to Cassington Rd	86	87	90	88	86	86	86	86	87	86	89	93	94	98	94	90	88	88	90	89	85	87	87	88	86	86	85	85	85	85
A44/A4144	4	A44 Woodstock Rd NB Cassington Rd to Sandy Lane	78	99	86	82	89	86	79	95	86	79	89	191	100	92	170	101	103	135	99	87	80	290	92	89	181	96	99	125	88	79
1444/2441444	5	A44 Woodstock Rd NB Sandy Lane to Begbroke HI	20	32	32	34	34	37	37	33	40	38	21	34	38	51	39	53	69	38	45	52	20	78	30	39	58	34	57	35	37	59
IND	6	A44 Woodstock Rd NB Begbroke HI to Spring Hill Rd	34	57	56	56	55	55	55	56	57	57	40	59	61	64	57	63	61	60	61	62	35	58	57	61	58	57	59	54	56	64
	7	A44 Woodstock Rd NB Spring Hill Rd to Langford Ln	46	43	44	45	41	43	43	43	43	43	58	48	48	57	47	48	46	44	46	46	48	47	49	53	44	49	45	44	44	45
	8	A44 Woodstock Rd NB Langford Ln to Bladon Roundabout	61	58	58	58	59	58	58	58	58	58	63	59	60	60	60	60	60	60	60	60	62	59	59	59	59	59	60	59	59	59
	9	A44 Woodstock Rd NB from Bladon Roundabout	96	96	97	97	97	97	97	96	96	97	99	99	99	99	98	100	98	98	98	100	99	99	99	97	99	99	99	100	99	98
	10	A44 Woodstock Rd SB to Bladon Roundabout	123	121	121	120	120	121	120	121	120	120	125	120	119	120	121	121	120	120	120	120	118	115	115	114	117	117	117	115	115	115
	11	A44 Woodstock Rd SB Bladon Roundabout to Langford Ln	64	58	58	58	59	60	59	58	58	58	66	61	61	61	61	62	59	61	62	61	63	59	58	59	59	59	59	59	58	58
	12	A44 Woodstock Rd SB Langford Ln to Spring Hill Rd	70	53	54	51	51	52	52	51	53	50	99	62	60	69	55	60	56	55	57	55	59	53	51	52	53	54	55	52	51	51
A44/A4144	13	A44 Woodstock Rd SB Spring Hill Rd to Begbroke HI	30	65	81	86	71	72	67	70	67	68	31	75	113	108	68	115	99	67	68	70	31	70	82	118	67	198	117	64	75	64
1444/144144	14	A44 Woodstock Rd SB Begbroke HI to Sandy Ln	47	78	105	98	71	77	86	62	69	74	53	76	124	117	71	121	93	73	91	98	40	54	62	67	58	88	82	56	64	66
30	15	A44 Woodstock Rd SB Sandy Lane to Cassington Rd	78	194	171	166	164	161	149	124	146	151	76	464	318	320	337	309	247	247	256	273	84	337	187	216	386	220	218	165	158	186
	16	A44 Woodstock Rd SB Cassington Rd to Loop Farm Roundabout	89	83	82	83	89	84	83	84	82	84	93	105	98	99	94	88	105	93	84	88	143	182	145	162	182	110	144	119	95	118
	17	A44 Woodstock Rd SB Loop Farm Roundabout to Wolvercote Roundabout	161	156	156	160	151	156	157	154	153	155	277	291	276	296	270	244	258	253	221	239	336	329	300	308	439	327	370	334	335	332
	18	A4144 Woodstock Rd SB from Wolvercote Roundabout	374	363	373	372	367	362	365	364	358	362	643	666	677	679	654	661	664	664	661	663	385	385	388	373	358	363	360	362	367	372
	19	A4165 Banbury Rd NB to Cutteslowe Roundabout	306	313	316	315	309	299	307	311	300	309	339	367	379	366	360	341	364	338	327	339	324	667	724	600	345	348	466	337	322	332
	20	A4165 Banbury Rd / Oxford Rd NB Cutteslowe Roundabout to Park and Ride	211	233	233	234	232	230	231	228	232	230	226	244	243	247	241	246	243	240	244	243	224	247	247	245	242	243	244	241	240	241
	21	Oxford Rd NB Park and Ride to Kidlington Roundabout	95	97	96	97	96	96	97	97	96	97	97	95	97	97	97	96	96	96	96	95	96	93	94	92	93	93	94	92	93	93
A4260/A4165	22	A4260 Oxford Rd NB Kidlington Roundabout to Bicester Rd	85	86	85	87	87	85	86	88	85	86	99	105	105	102	104	103	106	109	105	109	96	103	105	102	97	97	97	96	95	96
NB	23	A4260 Oxford Rd NB Bicester Rd to Yarnton Rd	56	55	55	54	57	55	54	55	54	54	64	68	69	65	66	65	65	65	66	66	67	66	65	66	62	62	64	61	62	61
	24	A4260 Oxford Rd NB Yarnton Rd to Langford Ln	233	237	236	234	257	237	232	234	231	232	285	332	325	289	286	300	306	311	286	291	264	284	287	263	290	259	314	273	252	274
	25	A4260 Banbury Rd NB Langford Ln to A4095	127	126	126	126	126	126	126	126	126	126	128	128	128	128	128	129	129	128	128	128	131	129	130	129	131	129	130	130	130	131
	26	A4260 Banbury Rb NB from A4095	114	115	115	115	116	116	116	116	117	117	116	117	117	118	116	116	116	116	116	116	115	115	115	115	117	115	117	115	115	117
	27	A4260 Banbury Rb SB to A4095	129	124	124	124	126	126	126	125	125	125	130	128	128	128	130	130	131	130	130	130	120	121	120	121	121	120	121	120	119	119
	28	A4260 Banbury Rd SB A4095 to Langford Ln	190	162	161	165	183	160	160	160	155	163	287	241	195	324	332	262	393	301	331	386	191	172	151	213	222	179	222	197	203	211
	29	A4260 Oxford Rd SB Langford Ln to Yarnton Rd	226	222	224	225	221	217	219	217	219	217	230	229	228	229	225	220	222	221	220	221	230	236	238	245	221	221	222	219	219	219
A4260/A4165	30	A4260 Oxford Road SB Yarnton Rd to Bicester Rd	75	74	75	75	73	73	75	72	72	74	79	79	78	77	74	73	74	74	73	73	74	79	86	88	70	70	70	70	72	70
SB	31	A4260 Oxford Rd SB Bicester Rd to Kidlington Roundabout	106	101	102	105	102	100	101	104	100	100	100	104	106	103	104	102	105	105	104	103	110	114	120	126	110	105	109	102	104	108
	32	Oxford Rd SB Kidlington Roundabout to Park and Ride	86	87	86	85	85	86	85	84	86	86	85	86	86	86	85	85	85	85	84	84	88	90	98	103	87	86	86	87	85	86
	33	A4165 Banbury Rd / Oxford Rd SB Park and Ride to Cutteslowe Roundabout	218	244	245	241	240	243	239	240	239	240	430	292	292	283	252	256	256	251	246	246	231	359	398	387	266	264	265	257	251	251
	34	A4165 Banbury Rd SB from Cutteslowe Roundabout	420	400	410	404	395	403	412	400	393	405	644	606	613	617	576	556	581	558	552	554	398	362	365	364	353	351	353	346	348	351
	35	A40 Eynsham Rd EB to Eynsham Roundabout	164	168	167	167	166	165	165	169	167	169	186	184	188	191	187	184	189	189	189	187	178	180	177	179	176	178	179	178	177	180
A40 EB	36	A40 Eynsham Rd EB Eynsham Roundabout to signals	107	111	115	114	113	111	110	111	111	111	107	110	111	111	107	107	111	112	111	110	106	105	104	110	106	107	104	103	103	103
1	37	A40 EB Eynsham Rd to Wolvercote Roundabout	520	549	531	535	575	526	526	527	524	522	567	613	581	684	601	543	544	562	533	547	562	1014	734	1087	751	534	529	554	532	531
	38	A40 WB Wolvercote Roundabout to Eynsham Rd	323	323	324	326	319	320	323	327	322	329	324	315	318	320	312	321	311	315	315	318	313	316	321	322	310	317	315	314	317	314
A40 WB	39	A40 Eynsham Rd WB signals to Eynsham Roundabout	94	95	93	94	94	94	95	94	93	93	104	102	100	104	102	100	109	101	102	102	113	114	107	110	104	103	104	106	106	106
1	40	A40 Eynsham Rd WB from Eynsham Roundabout	131	129	129	133	128	127	129	131	128	130	138	133	132	133	131	130	133	133	132	131	136	129	127	132	127	130	128	129	130	129

PM Private Vel	hicles Only																	me (Seconds)									-					
							15:00	-16:00									16:00	0-17:00									17:0	0-18:00				
Route		Section	Ref	DS Low	DS Low SB Bus	DS Low NB + SB Bus	DS Core	DS Core SB Bus	DS Core NB + SB Bus	DS High	DS High SB Bus	DS High NB + SB Bus	Ref	DS Low	DS Low SB Bus	DS Low NB + SB Bus	DS Core	DS Core SB Bus	B DS Core NB + SB Bus	DS High	DS High SB Bus	DS High NB + SB Bus	Ref	DS Low	DS Low SB Bus	DS Low NE + SB Bus		DS Core SB Bus	DS Core NB + SB Bus	DS High	DS High SB Bus	DS High NB + SB Bus
	1	A4144 Woodstock Rd NB to Wolvercote Roundabout	363	363	361	361	359	358	356	355	356	356	368	365	367	365	365	367	362	359	361	360	391	386	387	385	387	384	383	383	384	384
	2	A44 Woodstock Rd NB Wolvercote Roundabout to Loop Farm Roundabout	146	154	155	152	149	148	149	148	148	146	180	203	193	212	197	190	201	187	182	185	181	223	203	237	194	202	199	184	184	189
	3	A44 Woodstock Rd NB Loop Farm Roundabout to Cassington Rd	84	82	82	81	82	82	82	81	81	82	85	84	83	84	84	83	83	83	83	83	89	89	88	87	85	86	87	84	85	86
A44/A4144	4	A44 Woodstock Rd NB Cassington Rd to Sandy Lane	74	78	76	73	80	75	72	77	75	71	78	84	78	74	84	78	75	81	76	75	83	84	80	79	82	82	78	85	79	79
A444/A441444	5	A44 Woodstock Rd NB Sandy Lane to Begbroke HI	20	22	22	22	22	22	22	21	21	21	21	23	23	23	23	23	22	23	23	23	21	24	25	25	24	25	25	25	24	25
IND	6	A44 Woodstock Rd NB Begbroke HI to Spring Hill Rd	37	59	61	60	62	60	57	57	58	57	39	66	65	65	63	62	59	63	64	61	44	68	64	66	67	68	66	70	67	67
	7	A44 Woodstock Rd NB Spring Hill Rd to Langford Ln	42	43	42	42	42	42	42	41	42	41	43	42	42	42	42	42	42	42	42	42	43	44	43	42	45	42	42	44	42	42
	8	A44 Woodstock Rd NB Langford Ln to Bladon Roundabout	63	60	59	60	60	59	60	59	59	59	68	65	64	64	63	62	63	62	62	62	82	84	70	73	76	73	78	73	72	76
	9	A44 Woodstock Rd NB from Bladon Roundabout	99	99	99	98	100	100	99	99	98	99	101	100	100	99	98	99	99	99	98	99	102	101	102	101	102	101	102	101	102	101
	10	A44 Woodstock Rd SB to Bladon Roundabout	116	115	115	115	115	116	115	115	115	115	117	115	116	116	116	116	116	116	116	116	116	113	113	114	113	113	114	114	114	113
	11	A44 Woodstock Rd SB Bladon Roundabout to Langford Ln	61	57	57	57	57	56	56	57	57	57	61	57	57	57	56	57	56	56	56	57	60	56	56	56	56	56	56	57	57	57
	12	A44 Woodstock Rd SB Langford Ln to Spring Hill Rd	45	44	44	45	44	44	43	43	43	43	49	45	46	44	46	45	45	45	45	47	56	49	48	49	48	47	49	49	47	48
A44/A4144	13	A44 Woodstock Rd SB Spring Hill Rd to Begbroke HI	31	45	43	45	43	44	44	45	44	44	32	50	59	54	54	70	60	51	53	70	32	53	128	148	50	133	120	46	104	100
FD 50	14	A44 Woodstock Rd SB Begbroke HI to Sandy Ln	34	52	53	55	49	56	53	48	50	51	38	78	96	99	80	97	100	76	86	88	45	136	155	147	86	154	158	68	165	139
30	15	A44 Woodstock Rd SB Sandy Lane to Cassington Rd	69	105	114	117	96	105	111	95	102	100	72	213	173	186	192	172	163	167	159	145	74	686	328	338	697	336	331	706	334	327
	16	A44 Woodstock Rd SB Cassington Rd to Loop Farm Roundabout	80	86	86	86	85	87	84	86	84	85	86	167	136	154	158	154	155	158	152	146	89	162	116	175	193	165	161	178	154	167
	17	A44 Woodstock Rd SB Loop Farm Roundabout to Wolvercote Roundabout	167	184	176	180	177	184	177	186	183	184	182	187	194	185	200	190	183	192	177	177	178	184	176	176	175	177	187	180	174	183
	18	A4144 Woodstock Rd SB from Wolvercote Roundabout	356	345	341	345	346	350	347	350	348	353	661	662	663	670	644	652	664	665	661	670	376	400	382	372	375	369	359	371	366	358
	19	A4165 Banbury Rd NB to Cutteslowe Roundabout	331	347	338	343	343	337	344	335	335	340	330	353	352	354	351	348	345	347	346	342	341	377	375	380	367	357	365	356	356	348
	20	A4165 Banbury Rd / Oxford Rd NB Cutteslowe Roundabout to Park and Ride	234	242	243	243	246	249	246	240	240	242	237	259	260	263	259	257	256	253	260	252	249	270	273	272	269	267	270	266	264	262
	21	Oxford Rd NB Park and Ride to Kidlington Roundabout	99	96	96	97	97	96	98	95	95	95	98	98	98	99	99	99	98	98	97	98	93	103	101	98	98	102	100	102	100	99
A4260/A4165	22	A4260 Oxford Rd NB Kidlington Roundabout to Bicester Rd	94	92	95	93	93	92	94	89	91	92	90	88	86	89	90	93	91	87	87	87	88	88	91	95	93	94	94	90	94	87
NB	23	A4260 Oxford Rd NB Bicester Rd to Yarnton Rd	58	57	58	56	57	57	56	55	55	55	56	54	54	56	55	55	55	53	53	53	58	55	56	59	54	55	56	54	55	54
	24	A4260 Oxford Rd NB Yarnton Rd to Langford Ln	218	215	217	219	217	212	214	213	216	212	216	208	207	212	209	209	207	204	207	204	213	218	216	217	219	215	216	217	215	211
	25	A4260 Banbury Rd NB Langford Ln to A4095	127	127	126	127	127	126	125	126	127	127	129	125	126	126	128	128	129	126	126	127	124	124	125	125	125	125	125	125	125	125
	26	A4260 Banbury Rb NB from A4095	114	117	116	116	115	116	115	115	114	115	118	118	119	118	117	117	118	118	118	118	120	119	119	117	119	119	119	120	121	120
	27	A4260 Banbury Rb SB to A4095	116	115	115	115	115	115	115	114	114	114	120	119	119	119	118	118	118	118	118	118	120	118	118	119	120	119	120	119	120	120
	28	A4260 Banbury Rd SB A4095 to Langford Ln	131	131	130	130	129	129	130	130	130	130	130	130	129	130	129	129	129	130	130	130	131	131	129	129	132	129	130	131	130	133
	29	A4260 Oxford Rd SB Langford Ln to Yarnton Rd	216	219	217	218	218	218	219	218	216	218	219	231	229	229	232	229	231	229	228	228	223	237	235	234	235	231	232	237	230	231
A4260/A4165	30	A4260 Oxford Road SB Yarnton Rd to Bicester Rd	69	70	70	70	70	70	69	69	69	70	69	72	71	73	73	71	72	72	72	71	68	80	75	77	78	74	75	79	74	74
SB	31	A4260 Oxford Rd SB Bicester Rd to Kidlington Roundabout	102	109	103	107	103	107	107	107	109	105	114	125	116	119	121	113	123	120	111	120	113	132	123	129	133	130	121	139	124	121
	32	Oxford Rd SB Kidlington Roundabout to Park and Ride	78	81	80	80	82	80	79	80	80	79	82	82	82	83	82	82	82	82	83	81	80	86	85	84	86	84	84	86	83	84
	33	A4165 Banbury Rd / Oxford Rd SB Park and Ride to Cutteslowe Roundabout	196	225	230	223	225	222	224	224	224	222	201	235	235	237	234	229	231	231	230	228	210	250	250	245	249	242	246	253	244	239
	34	A4165 Banbury Rd SB from Cutteslowe Roundabout	373	383	380	382	385	380	380	377	380	380	463	502	518	501	502	489	500	480	474	474	360	402	398	390	386	374	378	387	366	373
	35	A40 Eynsham Rd EB to Eynsham Roundabout	190	196	193	195	199	199	195	194	194	196	196	199	204	203	200	199	200	202	203	202	182	184	183	182	181	180	183	182	182	182
A40 EB	36	A40 Eynsham Rd EB Eynsham Roundabout to signals	108	110	112	112	112	108	108	111	111	109	112	122	120	124	123	118	117	122	120	114	105	105	108	109	109	108	110	108	108	106
1	37	A40 EB Eynsham Rd to Wolvercote Roundabout	534	538	546	535	547	556	557	545	555	559	556	556	562	579	555	559	565	543	553	550	506	513	514	533	511	511	508	511	511	510
	38	A40 WB Wolvercote Roundabout to Eynsham Rd	298	306	312	309	308	302	307	309	308	305	295	302	314	304	306	300	309	307	305	300	295	304	311	304	311	307	307	310	306	302
A40 WB	39	A40 Eynsham Rd WB signals to Eynsham Roundabout	98	97	98	99	96	98	95	96	98	97	103	100	100	98	102	98	97	101	99	99	109	107	109	105	104	107	106	110	114	109
	40	A40 Eynsham Rd WB from Eynsham Roundabout	127	127	127	126	129	126	128	127	125	126	127	123	123	121	122	122	122	125	124	124	131	126	126	127	129	127	128	127	129	128