



Front Elevation

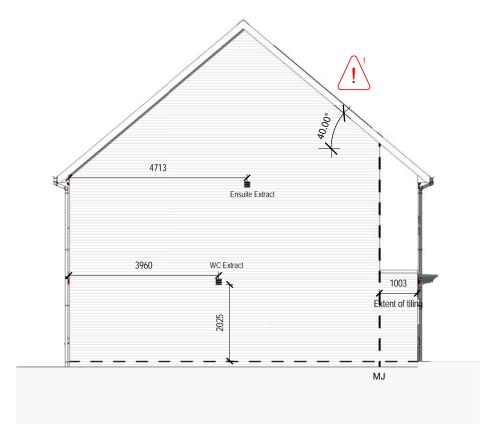

Left Elevation

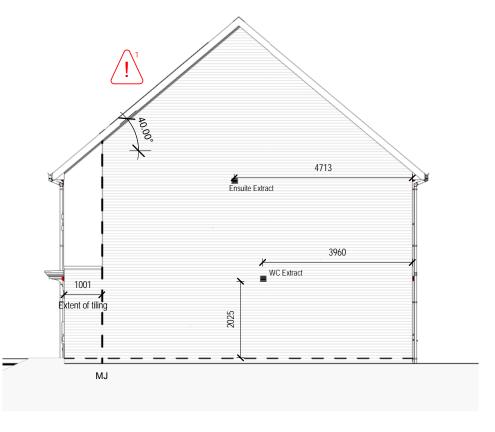

Right Elevation



Rear Elevation

PLOT NUMBERS AS: 23, 25 OPP: 24, 26

This Working Drawing is to be Read in Conjunction with the Crest Standard Construction Notes and the Standard Workmanship & Materials Specification







CN Construction Notes

CN Standard Details

Structural Engineers Design

RC

CKD REV

DATE DRN

T1

T2

Background Ventilation

Design permeability >5 m³ / (h.m²) at 50Pa in accordace to Table 5.2a-B Total Background ventilation required = 75,000mm²

Refer to Terrace Sets and External Materials Schedule for External Finishes

For Coursing Rod & Setting out of standard openings refer to CNSD-2018-001

Setting out dimensions to service terminals are to centre of extracts

Secondary DPC where FGL is less than 150mm lower than FFL



Movement Joint



Ancon AMR/S/D3.0/W60 or similar approved ladder bed joint reinforcement to be provided above and below all window openings; should extend for a minimum of 600mm beyond the reveal of the opening.



-Fall from height

Spandrel panels should be lifted and handled in accordance with the manufacturers guidance. Spandrel panels require lateral restraint at rafter level and along the base of the panel. In addition, tall panels may require further restraint. Both temporary and final installation / fixings to be in accordance with the manufacturers guidance.

13/05/22 HL Movement joints, bed joint reinforcment & PV panels added in. Tender issue 26/11/21 HL

REVISIONS

TENDER



Crest Nicholson Ltd. Crest House Pyrcroft Road Chertsey Surrey

KT16 9GN Tel: 01931 580 555 Fax: 08703 363 990

www.crestnicholson.com

roject Name	Bicester Replan			
itle	Elevation	Unit Size	- Sqft	
louse Type	Plots 23-24, 25-26			
cale	As indicated @ A3	Date	12/11/21	
		Drawn	SAS	Checked

54790/HGP/P23-26/A/1020