


Notes


1. All dimensions are in millimetres unless shown otherwise.
2. The wiring in the base compartment shall be neatly cleated to one side of the base board with sufficient tail length to connect into cut out.
3. All apparatus shall be securely fixed at all designated points to a back board or housing by stainless steel screws. All earth connections shall be by bolted crimped terminations.
4. All lanterns to be prewired by manufacturer using 3 core flex cable 1.5mm<sup>2</sup>.

Lantern head LED

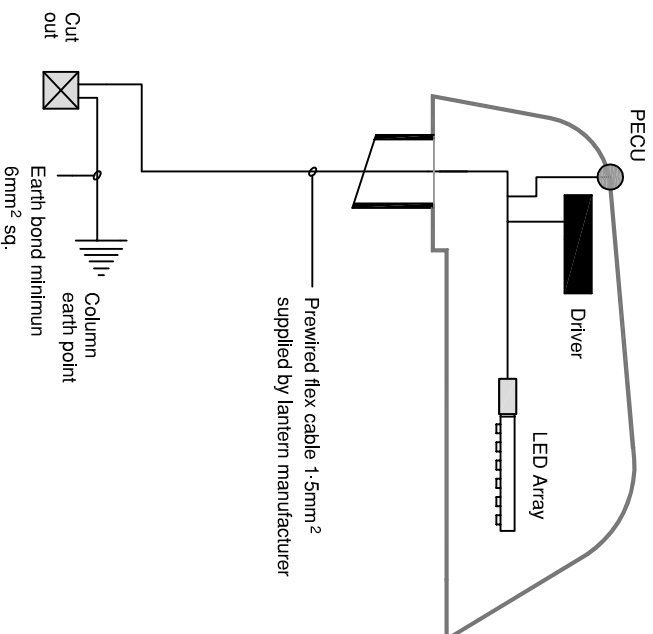

(a) LANTERN WITH INTEGRAL GEAR AND ONE  
PIECE PHOTO DRIVER CONTROLLER UNIT LED

Lantern head SON / CPO

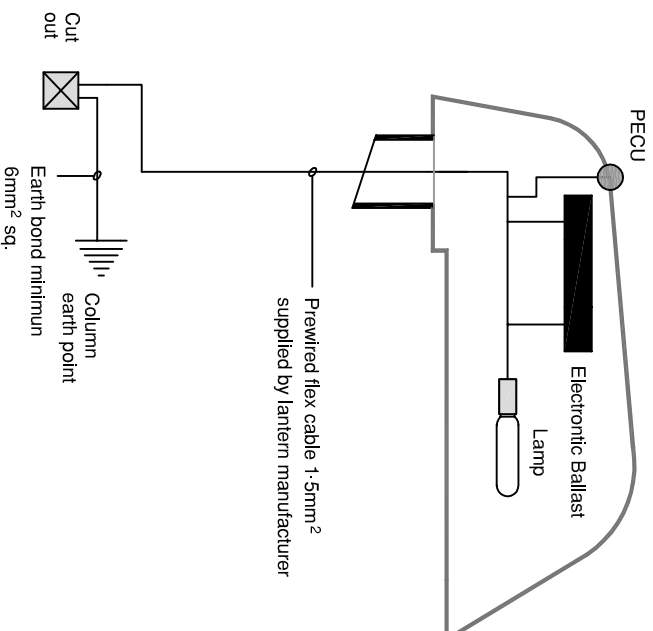

(b) LANTERN WITH INTEGRAL GEAR AND ONE  
PIECE PHOTO ELECTRIC CONTROLLER UNIT CPO



**OXFORDSHIRE  
COUNTY COUNCIL**  
www.oxfordshire.gov.uk

Oxfordshire County Council  
Speedwell House  
Speedwell Street  
Oxford OX1 1NE  
Tel: Oxford 01865 815700

STREET LIGHTING COLUMN WIRING : Types (a) to (b)

ILLUMINATED SIGNS AND  
STREET LIGHTING

© Unauthorised reproduction infringes copyright

Scale	Not to Scale
Drawn	Traced
Checked	
Initials	
Date	

f	Pecu moved	12.15
e	lanterns a & b note 2 removed LED & note 4 added	01.14
d	'Miniature' added to PECU on drawing	03.07
c	Re-issued	06.99
b	Re-issued	03.97
a	Column earth point amended	08.93
Index	Drawing No.	Date
	<b>HSD/14/045f</b>	<b>1</b>
	Category	
	<b>1</b>	