


Tree trunk to be aligned so that it is vertical from all sides. To be rechecked after pit has been backfilled, minor adjustments may have to be made.

Plastic strimmer guard to be fitted to the base of the trees to protect the trunk during maintenance. Guards 220mm x 150mm diameter as supplied by Green-Tech or similar approved supplier (for larger trees interlocking guards may be required).

1000mm diameter mulch ring to be spread around the base of the trees to help suppress weed growth. Mulch ring to comprise of 40mm depth wood chip.

Above ground staking system must be approved. Only to be used for trees in less prominent locations.

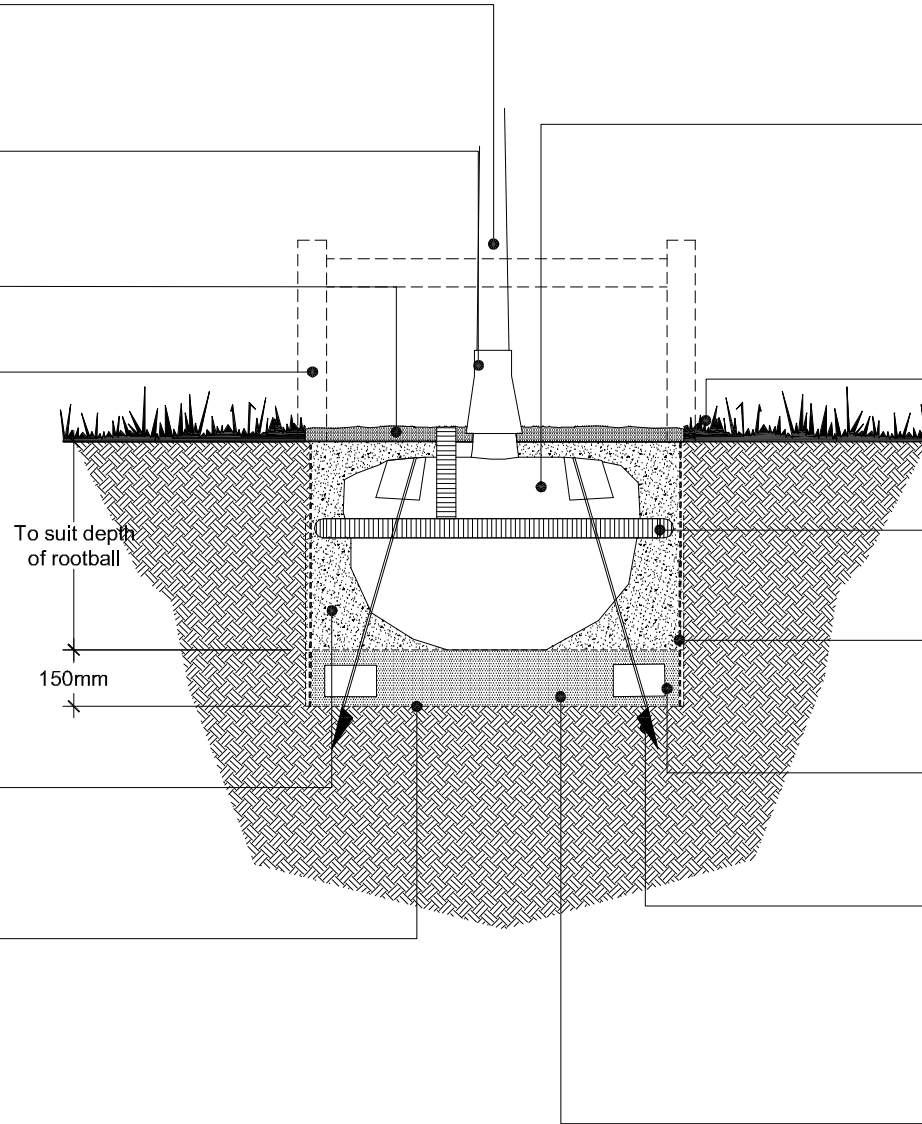

Tree pit to be backfilled with topsoil that meets the specification set out in BS 3882: 2007 'Specification for topsoiling'.

Base and side of pit to be broken up to ease root penetration into surrounding ground, this will also help break up compacted ground and improve drainage of pit.

Rootballed tree to be planted at nursery level. Tree pit to be dug to a width to suit rootball diameter. Confirm with supplier/nursery prior to excavation. As a general guide 20/25cm girth semi mature tree rootball can be up to 800mm in diameter.

Surrounding areas of turf/shrub planting

6" perforated irrigation pipe wrapped around rootball.

Root barrier as specified on the soft landscape proposals to be located along the outside edge of the tree pit to reduce damage to highways/parking bays. This should be agreed with the structural engineer before implementation.

Concrete anchors as alternative to Platipus anchor, details to be agreed prior to implementation


Platipus anchor and guying system, alternative systems may be used, such as Civic Trees timber frame system but only with prior approval.

Free draining aggregate to base of rootball/tree pit. 150mm washed gravel to base of pit to improve ground water percolation and reduce risk of pit flooding.


NOTES

- The Landscape Contractor is responsible for identifying all services below ground prior to the excavation of any tree pit. If plans are not available then detection equipment must be used, if there is a conflict between the pit position and services the Site Manager must be informed.
- All arisings from tree pit excavation must be removed either to an area identified by the Site Manager or to an approved tip off site.
- If services run close to the tree pit (within 1m) then a suitable root barrier (ReRoot 1000 or similar approved) must be installed to the side of the pit. The barrier must fit to both the width and depth of the pit, a sample or details of the proposed barrier must be submitted for approval.
- Prior to installation the rootball anchoring system/staking details must be submitted for approval.
- All tree pits must be backfilled with topsoil in accordance with BS 3882: 2007 'Specification for topsoiling'. If soil has not been supplied by site then approved soil must be imported to site, all certificates must be handed to the Site Manager on delivery.
- All works must be completed in accordance with the detail.
- An aftercare programme must be agreed with the region to ensure that the tree is monitored and watered on as required.


This drawing should be read in conjunction with the tree proposals set out on drawings Bir.4372_01H, 02G, 03E, 04E and 07B (excluding the trees to swales along Camp Road on drawing 01H).

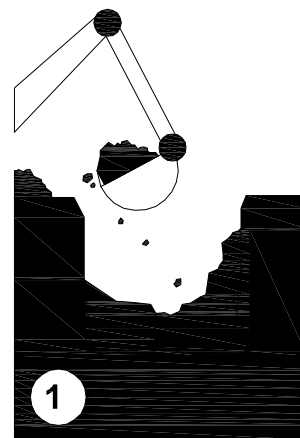


1 Excavate tree pit to comfortably accommodate the proposed rootball, avoiding excess pit depth.



2 Break up and loosen material to the sides of the pit, in particular the base of the pit to avoid leaving heavily compacted ground.

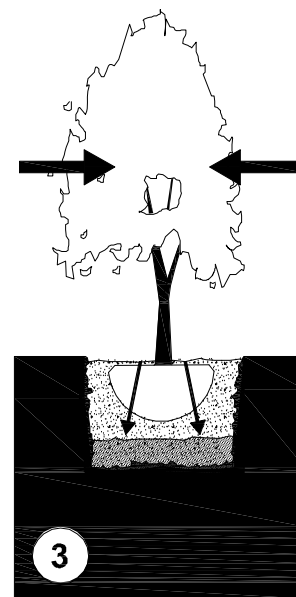

3 Plant rootballed tree at nursery level in accordance with above detail using an approved anchoring system. Ensure that tree is vertical.

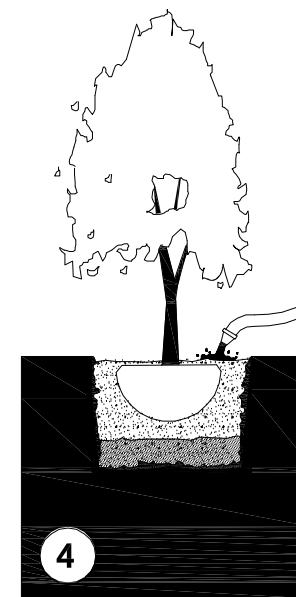

4 Water tree to field capacity following planting works, trees must be checked and watered on a regular basis.

Rev	Description	Date	Team
A	Updated to LPA comments regarding guards and mulch.	22/01/14	LM

Heyford Park, Parcel B2A

Rootballed Trees within Turfed/Soft Landscaped Areas

Client:
Bovis Homes Central Region

www.pegasuspg.co.uk
Team AP
18/12/2012
Scale: 1:20 @A3

Bir.4372_10A

