


- CONTRACTORS MUST CHECK ALL DIMENSIONS ON SITE. ONLY FIGURED DIMENSIONS ARE TO BE WORKED FROM. DISCREPANCIES MUST BE REPORTED TO THE ARCHITECT OR ENGINEER BEFORE PROCEEDING. © THIS DRAWING IS COPYRIGHT .
- REPRODUCED FROM OS SITEMAP © BY PERMISSION OF ORDNANCE SURVEY® ON BEHALF OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT 2008. ALL RIGHTS RESERVED. LICENCE NUMBER 100007126.
- ALL EXISTING BUILDINGS AND HARD/SOFT LANDSCAPED AREAS WITHIN LIMITS OF S278 WORKS TO BE GRUBBED UP.
- ALL VISIBILITY SPLAYS IN ACCORDANCE WITH MANUAL FOR STREETS. ACTUAL TRAFFIC SPEEDS ASSUMED TO BE 20MPH REDUCING TO 10MPH AT FEATURES.

KEY


- S278 WORKS BOUNDARY
- HALF BATTERED KERB 125 x 255mm (HB2) 120mm UPSTAND
- BULLNOSE KERB 125 x 150mm (BN) 25mm UPSTAND
- EDGING KERB 150 x 50mm (EF) 0mm UPSTAND
- BULLNOSE KERB ON END (BN) 0mm UPSTAND
- CHANNEL KERB
- BLOCK PAVE RAMP & MARKINGS
- BITUMINOUS CARRIAGEWAY
- BLOCK PAVE CARRIAGEWAY
- BITUMINOUS FOOTWAY
- BITUMINOUS SHARED FOOTWAY / CYCLEWAY (UNSEGREGATED)
- VEHICULAR CROSS OVER
- VERGE
- TACTILE PAVING WITH 0mm KERFBASE
- CORDUROU PAVING
- PROPOSED BUS STOP (FLAG OR SHELTER AS SPECIFIED)
- PROPOSED NEW TREE AND ASSOCIATED TREE PIT. FINAL POSITIONS TBA (REFER TO PEGASUS DRAWING)
- 2.4m x 25m VISIBILITY SPLAY (20mph)
- STREET LIGHTING COLUMN POSITIONS. REFER TO MMA DRGS MMA12618-001 & 002
- EXISTING STREET LIGHTING COLUMN. REFER TO MMA DRGS MMA12618-001 & 002
- PROPOSED SWALE (HIGHWAY DRAINAGE ONLY)
- PROPOSED RAMP. PLEASE REFER TO DRAWING HEYF-5-526 FOR CONSTRUCTION DETAILS
- REFLECTIVE BOLLARD

STREET LIGHTING KEY

- PROPOSED 6m CONICAL "AVON" STANTON STEEL LIGHTING COLUMN AS PER OCC STANDARD LIGHTING COLUMN SPECIFICATION (SPECIFICATION SUPPLIED WITH DESIGN PACK) WITH A WRTL LUMA 2-60 GREEN LANTERN. MOUNTING HEIGHT 8M. LANTERN COMPLETE WITH FULLY DIMMABLE ELECTRONIC CONTROL GEAR AND ZODION S59 PART NIGHT MINI CELL SET TO 55/28 LUX. SUPPLY TO BE A PERMANENTLY LIVE SINGLE PHASE DNO SUPPLY WITH NO ISOLATOR UNIT. AS PER OXFORDSHIRE COUNTY COUNCIL SPECIFICATION. ZODION S59 SHALL BE PART NIGHT DIMMED WITH 7 HOURS DIM FROM 22:00 TO 05:00 TO 75%.
- ALL LANTERNS ARE TO HAVE THE CANOPY AND BODIES FINISHED IN FACTORY APPLIED REED GREEN RAL 6013. ALL COLUMNS FINISHES SHALL BE EPA COMPLIANT EPOXY/POLYSILOXANE.
- SPECIFICATION SHOULD BE CHECKED AGAINST LATEST MMA DESIGN PRIOR TO INSTALLATION
- ILLUMINATED SIGN

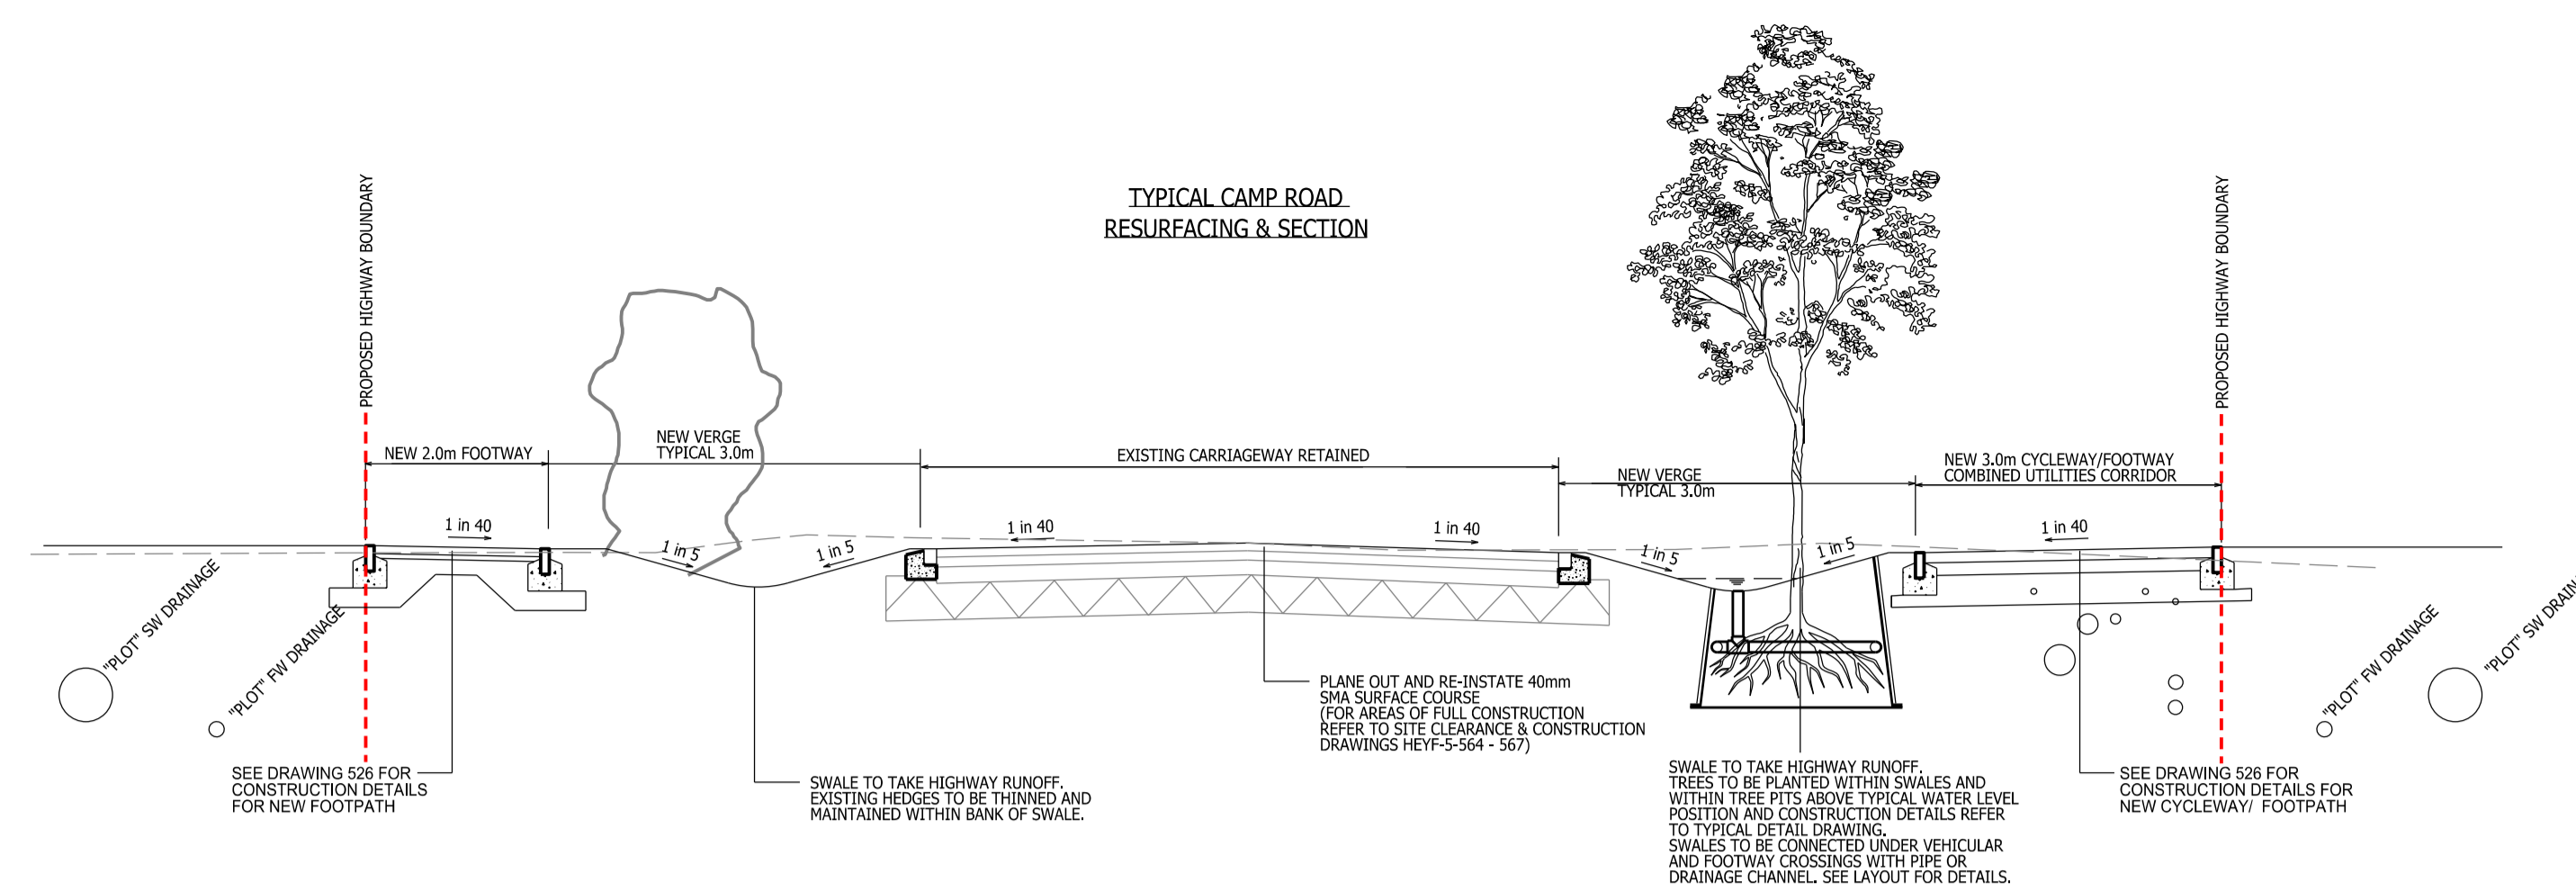

HEYF/5/514

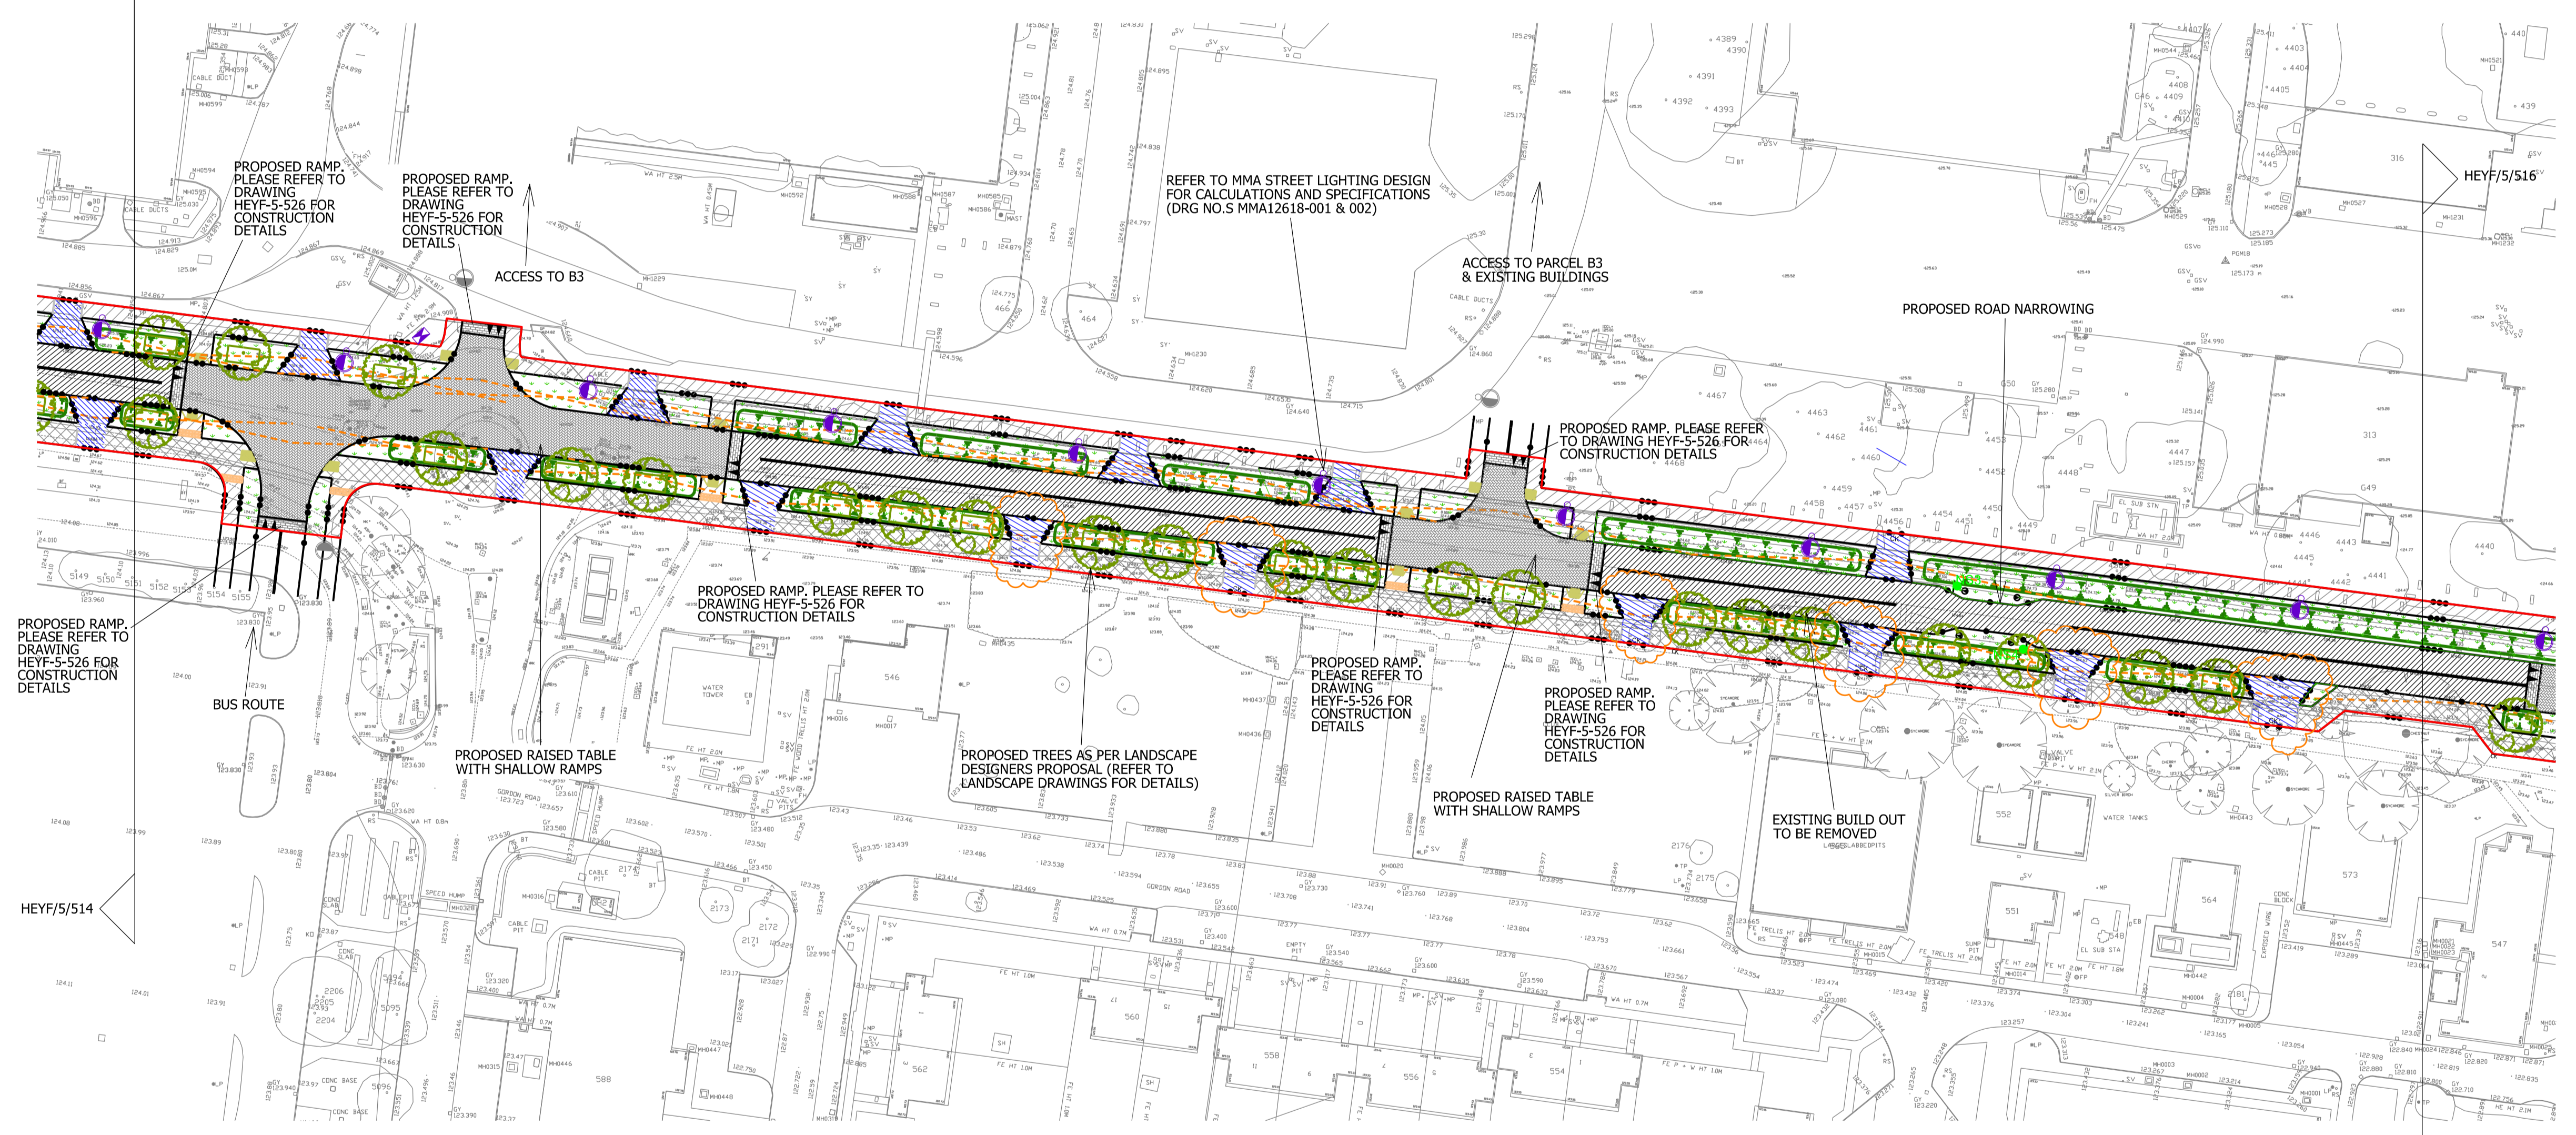

PROPOSED RAMP, PLEASE REFER TO DRAWING HEYF-5-526 FOR CONSTRUCTION DETAILS

HEYF/5/514

HEYF/5/516

Revision	Description	Drawn	Checked	Date
R	CAMP ROAD VEHICULAR CROSSING POINT FOR PARCEL 7B ADDED	DSH	AT	21-12-2018
P	CAMP ROAD VEHICULAR CROSSING POINTS FOR PARCEL B6 AMENDED	AT	JF	07-12-2016
N	CONSTRUCTION ISSUE	CG	AT	13-05-2015
M	STREET LIGHTING REVISED TO SUIT MMA DRAWINGS 12618-001-R5 AND 12618-002-R5	AT	JF	23-04-2015
L	STREET LIGHTING NOTE ADDED	CG	AT	27-01-2015
K	DRAWING UPDATED TO SUIT OCC S278 COMMENTS	CG	AT	26-11-2014
J	DRAWING UPDATED TO SUIT LATEST CAMP ROAD PROPOSALS	CG	AT	22-10-2014
H	STREET LIGHTING UPDATED	SD	JGF	06-05-2014
G	ACCESS ROAD RAMP INCLUDED WITHIN S278. NOTE AMENDMENTS & MINOR ADJUSTMENTS	SD	JGF	10-03-2014
F	UPDATED TO SUIT LATEST CAMP ROAD PROPOSALS	SD	JGF	25-02-2014
E	UPDATED TO SUIT LATEST CAMP ROAD LAYOUT	SD	JGF	03-10-2013
D	LAYOUT REVISED TO SUIT ADJACENT PARCEL PROPOSALS	SD	JGF	28-08-2013
C	ADDITIONAL NOTES & UPDATED TO SUIT LATEST LAYOUT	SD	JGF	18-07-2013
B	VERGES WIDENED, SWALES AND INDICATIVE TREE POSITIONS ADDED. TYPICAL SECTION ADDED TO DRAWING	SD	JGF	20-06-2013
A	REVISION FOR S278 SUBMISSION	SD	JGF	05-06-2013

Preliminary
 Information
 Tender
 Construction
 As Built

Woods Hardwick

Architects, Engineers and Development Consultants

Title: UPPER HEYFORD
 Details: CAMP ROAD S278 SURFACE FINISHES (2 OF 4)
 Scale: 1:500 @ A1 Date: MAY 2013 Drawn: JGF Chk: IDB

15-17 Goldington Road
 Bedford MK40 3JH
 United Kingdom
 T. +44 (0)1234 268862
 F. +44 (0)1234 268834
 mail@woodsardwick.com
 www.woodsardwick.com

