



- NOTES
- All dimensions and levels are in metres unless otherwise noted
  - This drawing is to be read in conjunction with the relevant Architect's/Engineer's drawings, specifications and CDM documentation
  - This drawings has been produced electronically and may have been photo reduced or enlarged when copied. Work to figured dimensions only (DO NOT SCALE). All dimensions to be checked on site. Any errors or omissions to be reported to the engineer immediately.
  - This drawing contains coloured lines / information that may not be clear if reproduced in black and white.

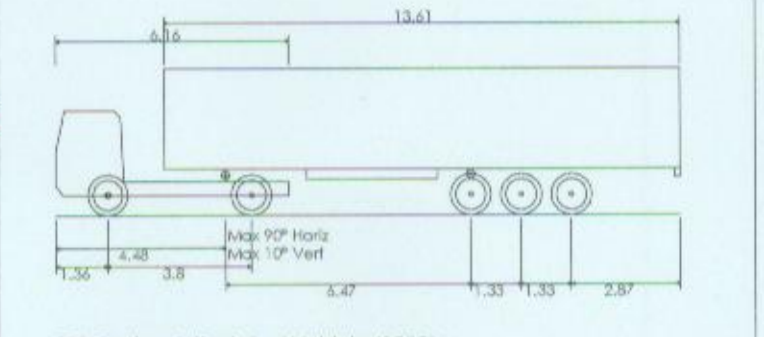

Vehicle Specification (1:200)

Overall Length	16.48m
Overall Width	2.55m
Overall Body Height	3.87m
Min Body Ground Clearance	0.51m
Max Track Width	2.47m
Lock to Lock Time	3.00s
Kerb to Kerb Turning Radius	6.55m

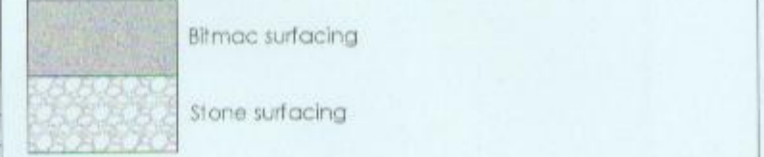

CHERWELL DISTRICT COUNCIL  
 Plan No. 15/00394/F  
 Amended/additional plans received  
 26/3/15 with Applicants/Agent's  
 email letter dated 26/3/15.

Rev	Drawn by	CHK'd by	Comments	Date
P03	NJ	TST	Haul road surfacing amended. Proposed wheel wash relocated. Stone haul road construction detail added.	05/03/15
P02	NJ	DJ	Security fencing added	27/02/15
P01	NJ	DJ	Initial issue	27/02/15

DRAWING TITLE  
**Temporary Haul Road Access Plan**

PROJECT  
 Phase 2  
 Shipton Road,  
 Woodstock  
 Oxon

DESIGNED BY TST	DRAFTED BY NJ	APPROVED BY DJ
DATE 27/02/2015	STATUS <b>INFORMATION</b>	

SCALE  
 As Noted

CLIENT

JOB NUMBER 12-1162	DRAWING NUMBER 07	REVISION P03
-----------------------	----------------------	-----------------