

Specification and schedule of quantities. Network Rail Embankment
Native species grassland seed mix 9843m²

Botanical Name	Common Name	Percentage
Wild flowers		
<i>Achillea millefolium</i>	Yarrow	0.5
<i>Centaurea nigra</i>	Common Knapweed	0.5
<i>Daucus carota</i>	Wild Carrot	1
<i>Gallium verum</i>	Lady's Bedstraw	2.5
<i>Knautia arvensis</i>	Field Scabious	1
<i>Leucanthemum vulgare</i>	Oxeye Daisy	2
<i>Lotus corniculatus</i>	Birdsfoot Trefoil	0.2
<i>Plantago lanceolata</i>	Ribwort Plantain	1
<i>Primula veris</i>	Cowslip	1.5
<i>Prunella vulgaris</i>	Selfheal	2.5
<i>Ranunculus acris</i>	Meadow Buttercup	3
<i>Ranunculus bulbosus</i>	Bulbous Buttercup	2
<i>Rhinanthus minor</i>	Yellow Rattle	1.5
<i>Rumex acetosa</i>	Common sorrel	0.8
Grasses		
<i>Agrostis capillaris</i>	Common Bent	8
<i>Cynosurus cristatus</i>	Crested Dogstail	40
<i>Festuca rubra</i>	Slender-creeping Red-fescue	28
<i>Phleum bertolonii</i>	Smaller Cat's-tail	4

Specification and schedule of quantities. Hedging (Planted in double staggered row @300mm centres)
2813m

Botanical Name	Common Name	Height (cm)	Age	Root	Percentage	Quantity
<i>Crataegus monogyna</i>	Common Hawthorn	60-80	1+1	BR	75	14064
<i>Prunus spinosa</i>	Blackthorn	60-80	1+1	BR	25	4688

Specification and schedule of quantities. Specimen trees to be planted as a random mix of species.

Botanic Name	Common Name	Height (cm)	Girth (cm)	Root	Quantity
<i>Quercus robur</i>	Pedunculate Oak	250-300	6-8	RB	24
<i>Malus sylvestris</i>	Crab Apple	250-300	6-8	RB	20

- Legend/Notes
- ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED.
 - EARTHWORKS APPROACH EMBANKMENTS SHOWN AT A MAXIMUM 1 IN 3 SLOPE.

KEY

- GRASS SEEDING (NATIVE SPECIES GRASSLAND MIX)
- PROPOSED HEDGE PLANTING
- EXISTING TREE LINE OR HEDGEROW TO BE RETAINED
- SPECIMEN TREE
- NEW HIGHWAYS FENCING

This drawing includes map data licensed from ordnance survey, © Crown copyright and database rights 2013 Ordnance Survey 0100040692.

Rev	Date	Description of Revisions	Drawn	Chkd	Appr
B01	04/06/14	FOR PLANNING	MB	SM	MB

FOR CONSTRUCTION



Contractor(s)

ATKINS

The Axis
10 Holliday Street
Birmingham
West Midlands
B1 1TF

Tel: +44 (0)121 483 5000
Fax: +44 (0)121 483 6333



Project
EAST WEST RAIL PHASE 1

Drawing Title
HOLTS FARM OVERBRIDGE LANDSCAPING PLAN PLANNING 4 OF 4

Designed	A RICHARDSON	Signed	MB	Date	09/05/2014
Drawn	M BUDD	Signed	MB	Date	09/05/2014
Checked	S MOON	Signed		Date	09/05/2014
Approved	M BAILEY	Signed		Date	09/05/2014

Scale(s)
AS SHOWN AT A1

ELR & Mileage
OXD 21MP + 12CH

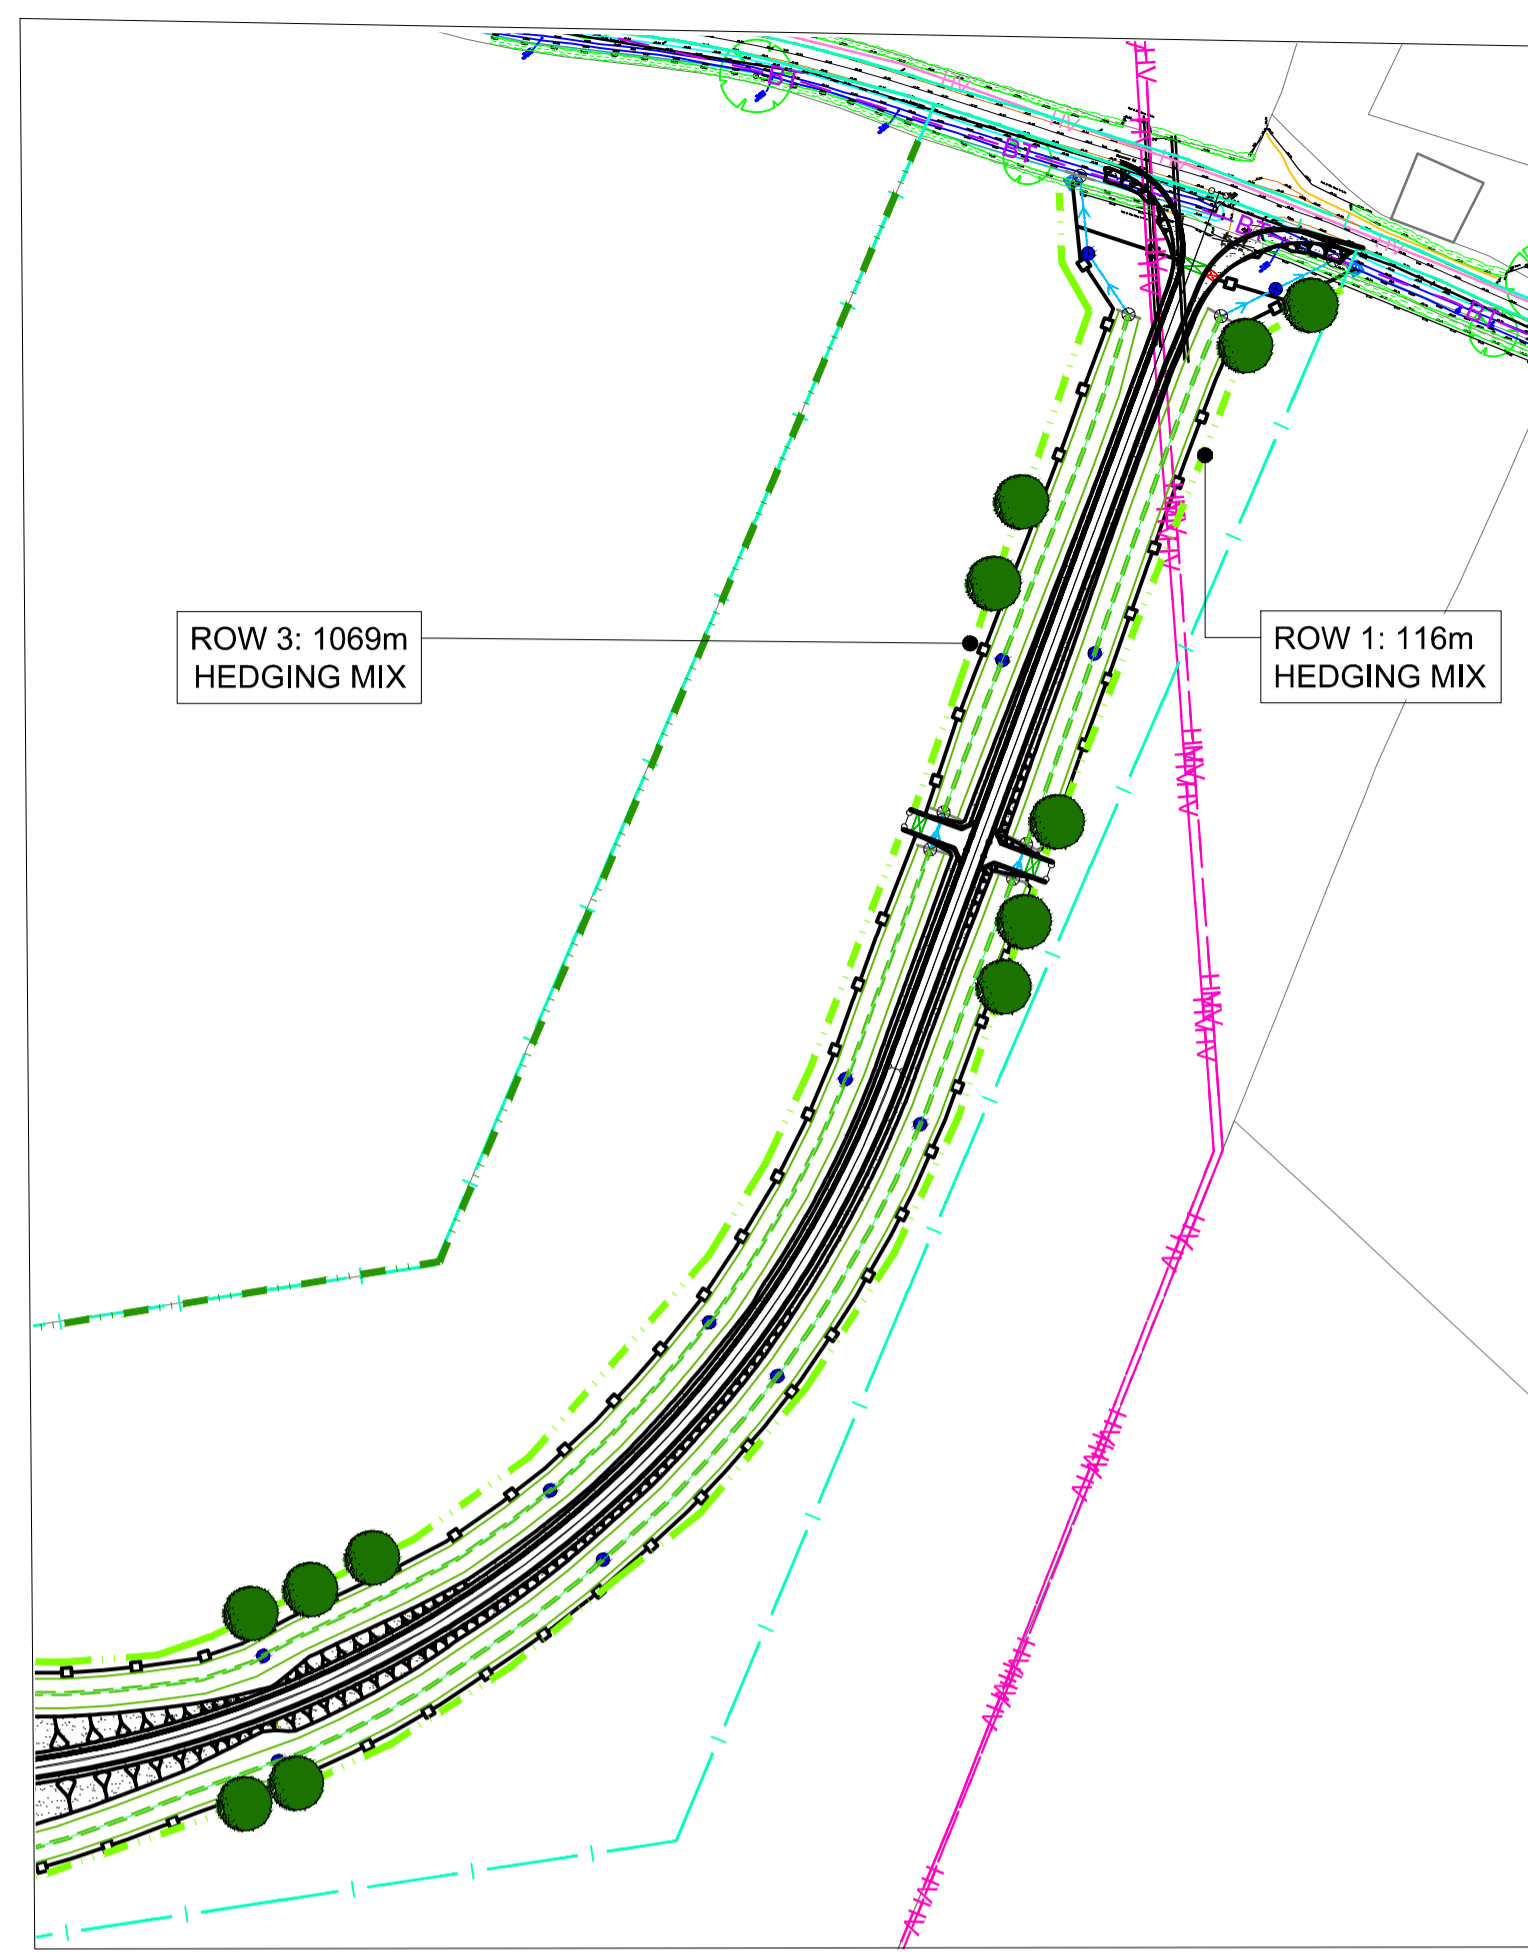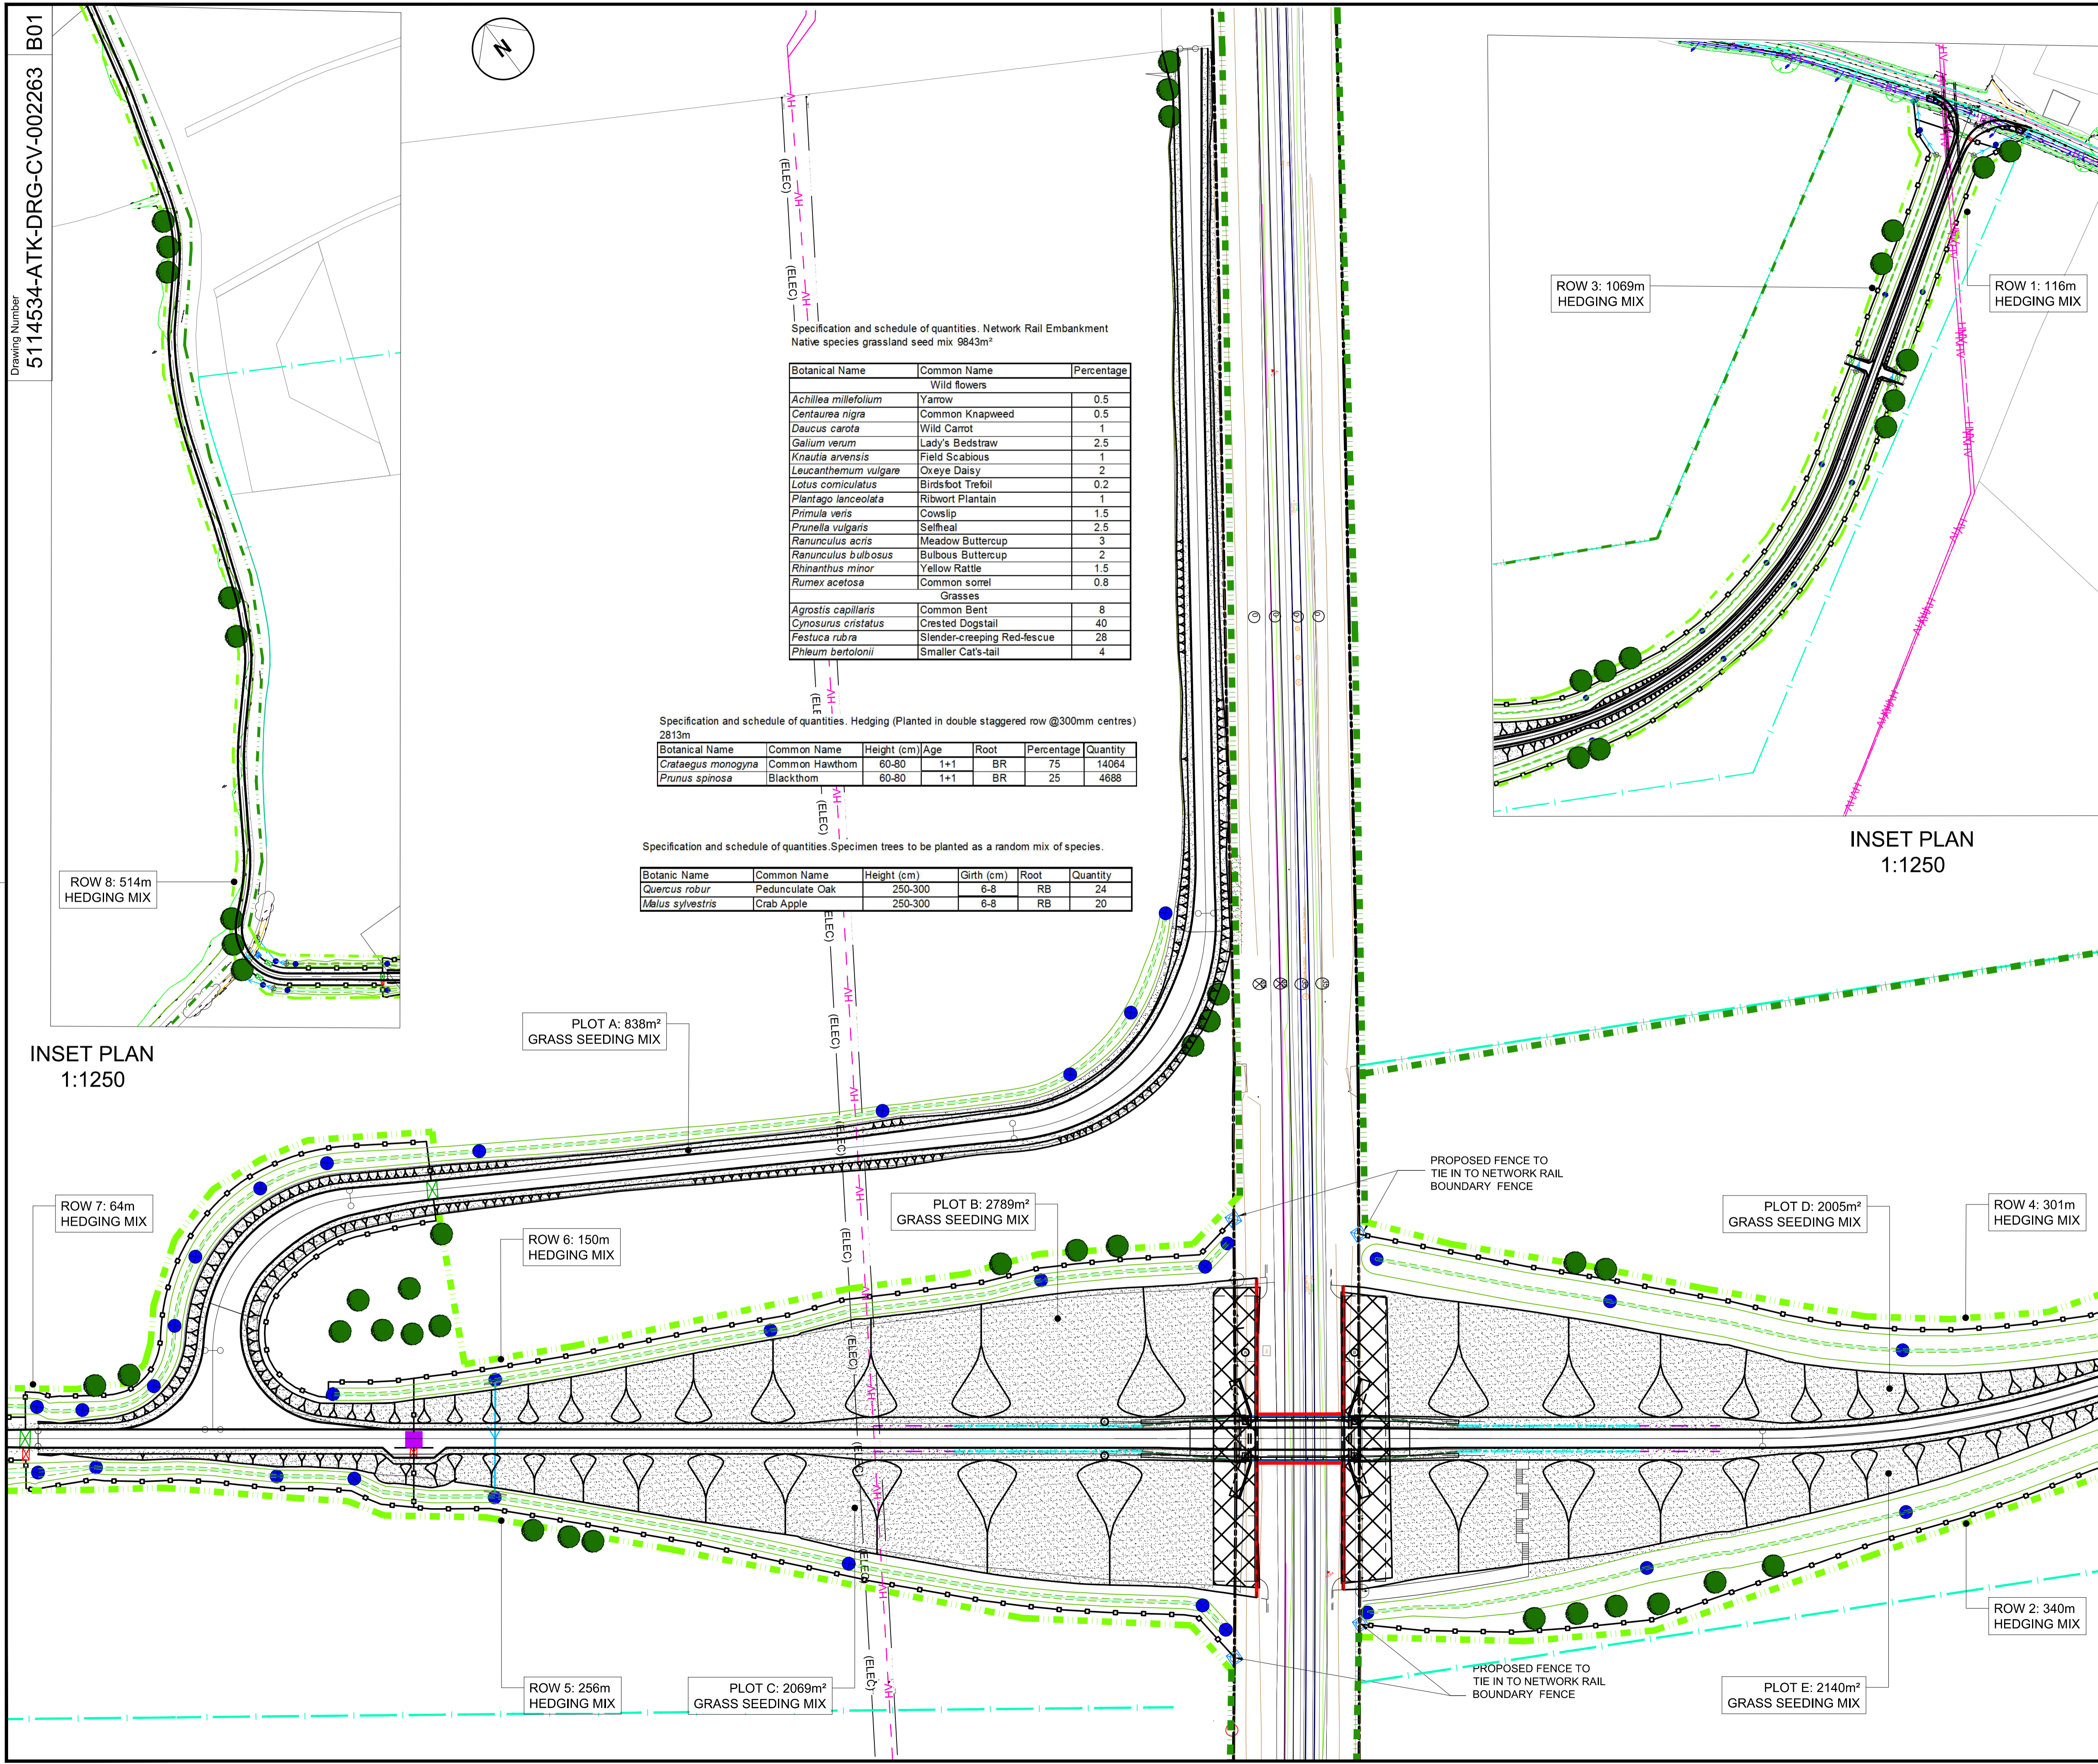

INSET PLAN
1:1250

PLOT A: 838m²
GRASS SEEDING MIX

PLOT B: 2789m²
GRASS SEEDING MIX

PLOT D: 2005m²
GRASS SEEDING MIX

ROW 6: 150m
HEDGING MIX

ROW 4: 301m
HEDGING MIX

ROW 7: 64m
HEDGING MIX

ROW 5: 256m
HEDGING MIX

PLOT C: 2069m²
GRASS SEEDING MIX

PLOT E: 2140m²
GRASS SEEDING MIX

ROW 2: 340m
HEDGING MIX

ROW 8: 514m
HEDGING MIX

ROW 3: 1069m
HEDGING MIX

ROW 1: 116m
HEDGING MIX

PROPOSED FENCE TO TIE IN TO NETWORK RAIL BOUNDARY FENCE

PROPOSED FENCE TO TIE IN TO NETWORK RAIL BOUNDARY FENCE