For Soft Landscaping works at Bainbridge Road Sidings, refer to RSK Drawing Number RSK-DRG-OPS-P007 Rev CO1

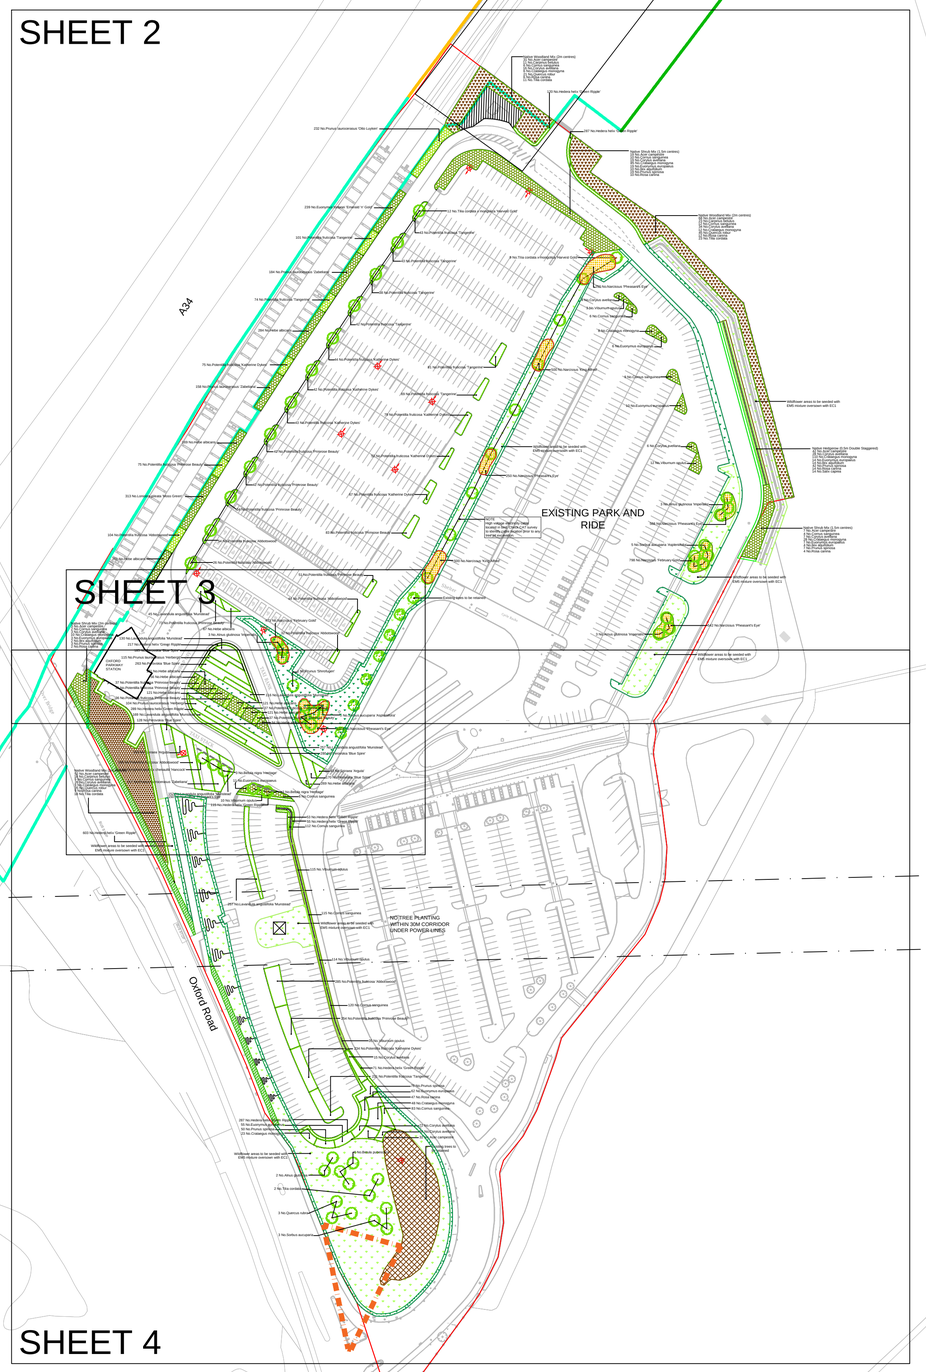

Trees

Number	Species	Specification	Height	Girth
75 No.	Acer campestre	1+1: Transplant :B	40-60cm	
115 No.	Crataegus monogyna	1+1: Transplant :B	40-60cm	
217 No.	Euonymus europaeus	1+1: Transplant :3 brks :B	40-60cm	
3 No.	Sorbus aucuparia	Extra Heavy Standard: 3x: RB: Multi-Stemmed	400-450cm	
2 No.	Tilia cordata	Heavy Standard: 5 brks: 3x: RB: Clear Stem 175-200cm	350-400cm	12-14cm
3 No.	Quercus rubra	Heavy Standard: 5 brks: 3x: RB: Clear Stem 175-200cm	350-425cm	12-14cm
3 No.	Betula pubescens	Extra Heavy Standard: 5 brks: 3x: RB: Multi-Stemmed	400-450cm	14-16cm
2 No.	Alnus glutinosa	Heavy Standard: 5 brks: 3x: RB: Clear Stem min. 200cm	350-425cm	12-14cm
5 No.	Betula nigra 'Heritage'	Extra Heavy Standard: 5 brks: 3x: RB: Clear Stem min. 200cm	400-450cm	14-16cm
8 No.	Crataegus monogyna	1+1: Transplant – seed raised: B	40-60cm	
9 No.	Alnus glutinosa 'Imperialis'	Heavy Standard: 5 brks: 3x: RB: Clear Stem min. 200cm	350-425cm	12-14cm
10 No.	Sorbus aucuparia 'Asplenifolia'	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	400-450cm	16-18cm
21 No.	Tilia cordata x mongolica 'Harvest Gold'	Heavy Standard: 5 brks: 3x: Clear Stem 175-200cm :C	350-425cm	12-14cm
1 No.	Prunus 'Shirofugen'	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	400-450cm	16-18cm

Shrubs

Number	Species	Specification	Height	Pot Size	Density
1026 No.	Perovskia 'Blue Spire'	Bushy: 3 brks: C	20-30cm	2L	4/m²
1126 No.	Lavandula angustifolia 'Munstead'	Bushy: 5 brks: C	20-30cm	3L	4/m²
219 No.	Prunus laurocerasus 'Herbergii'	Bushy :5 brks	40-60cm	5L	2/m²
837 No.	Potentilla fruticosa 'Primrose Beauty'	Bushy: 4 brks: C		3L	3/m²
1024 No.	Hebe albicans	Bushy: 5 brks: C		3L	4/m²
25 No.	Corylus avellana	1+1: Transplant - seed raised: Branched: 2 brks: B	40-60cm		1.5C/r
239 No.	Euonymus fortunei 'Emerald 'n' Gold'	Bushy :5 brks	20-30cm	2L	4/m²
722 No.	Potentilla fruticosa 'Tangerine'	Bushy: 4 brks: C		3L	3/m²
559 No.	Prunus laurocerasus 'Zabeliana'	Bushy: 3 brks: C		3L	3/m²
636 No.	Potentilla fruticosa 'Katherine Dykes'	Bushy: 4 brks: C		3L	3/m²
313 No.	Lonicera pileata 'Moss Green'	Bushy :3 brks	20-30cm	2L	4/m²
734 No.	Potentilla fruticosa 'Abbotswood'	Bushy: 4 brks: C		3L	3/m²
232 No.	Prunus laurocerasus 'Otto Luyken'	C	40-60cm	3L	3/m²
115 No.	Rosa canina	Branched :5 brks :C			2/m²
207 No.	Corylus avellana	1+1 :Branched :2 brks :B	40-60cm		3/m²
243 No.	Prunus spinosa	1+1 :Branched :2 brks :B	40-60cm		2/m²
347 No.	Cornus sanguinea	1+1 :Branched :2 brks :B	60-80cm		6/m
264 No.	Viburnum opulus	1+1 :Branched :2 brks :B	40-60cm		6/m
83 No.	Cornus sanguinea	1+1 :Branched :3 brks :B	60-80cm		3/m²
25 No.	Viburnum opulus	1+1: Transplant - seed raised: Branched: 2 brks: B	40-60cm		1.5C/r
21 No.	Cornus sanguinea	1+1: Transplant - seed raised: Branched: 3 brks: B	60-80cm		1.5C/r
27 No.	Euonymus europaeus	1+1: Transplant - seed raised: Branched: 3 brks: B	40-60cm		1.5C/r
196 No.	Spiraea 'Arguta'	Branched: 5 brks: C	40-60cm	3L	3/m²
384 No.	Symphoricarpos x chenaultii 'Hancock'	0/1: Cutting: Branched: 2 brks: B	40-60cm		4/m²

Climbers

Number	Species	Specification	Pot Size	Height	Density
1810 No.	Hedera helix 'Green Ripple'	Several Shoots :3 brks	2L	40-60cm	5/m²
287 No.	Hedera helix 'Green Ripple'		2L	40-60cm	5/m²

Bulbs

Number	Species	Specification	Density
650 No.	Narcissus 'Pheasant's Eye'	Grade 12/14	No.
1000 No.	Narcissus 'King Alfred'	Grade 10/12	No.
1269 No.	Narcissus 'February Gold'	Grade 10/12	10/m²
2334 No.	Narcissus 'Pheasant's Eye'	Grade 12/14	10/m²

Native Shrub Mix

Number	Species	Specification	Height	Pot Size	Density
3 No.	Acer campestre	1+1: Transplant - seed raised: B	40-60cm	2L	2C/r
10 No.	Crataegus monogyna	1+1: Transplant - seed raised: B	40-60cm		2C/r
26 No.	Acer campestre	1+1: Transplant - seed raised: B	40-60cm	2L	1.5C/r
113 No.	Crataegus monogyna	1+1: Transplant - seed raised: B	40-60cm		1.5C/r
3 No.	Corylus avellana	1+1: Transplant - seed raised: Branched: 2 brks: B	40-60cm		2C/r
3 No.	Prunus spinosa	1+1: Transplant - seed raised: Branched: 3 brks: B	40-60cm		2C/r
26 No.	Corylus avellana	1+1: Transplant - seed raised: Branched: 2 brks: B	40-60cm		1.5C/r
26 No.	Prunus spinosa	1+1: Transplant - seed raised: Branched: 2 brks: B	40-60cm		1.5C/r
2 No.	Cornus sanguinea	1+1: Transplant - seed raised: Branched: 3 brks: B	60-80cm		2C/r
3 No.	Euonymus europaeus	1+1: Transplant - seed raised: Branched: 3 brks: B	40-60cm		2C/r
14 No.	Cornus sanguinea	1+1: Transplant - seed raised: Branched: 3 brks: B	60-80cm		1.5C/r
26 No.	Euonymus europaeus	1+1: Transplant - seed raised: Branched: 3 brks: B	40-60cm		1.5C/r
2 No.	Rosa canina	Branched: 5 brks: C	40-60cm	3L	2C/r
14 No.	Rosa canina	Branched: 5 brks: C	40-60cm	3L	1.5C/r
2 No.	Ilex aquifolium	Bushy: 2 brks: C	30-40cm	2L	2C/r
14 No.	Ilex aquifolium	Bushy: 2 brks: C	30-40cm	3L	1.5C/r
Total :287 No.					

Native Woodland Mix

Number	Species	Specification	Height	Density
151 No.	Acer campestre	1+1: Transplant - seed raised: B	40-60cm	2C/r
52 No.	Carpinus betulus	1+1: Transplant - seed raised: B	60-80cm	2C/r
27 No.	Crataegus monogyna	1+1: Transplant - seed raised: B	40-60cm	2C/r
101 No.	Quercus robur	1+1: Transplant - seed raised: B	40-60cm	2C/r
52 No.	Tilia cordata	1+1: Transplant - seed raised: B	40-60cm	2C/r
76 No.	Corylus avellana	1+1: Transplant - seed raised: Branched: 2 brks: B	40-60cm	2C/r
27 No.	Cornus sanguinea	1+1: Transplant - seed raised: Branched: 3 brks: B	40-60cm	2C/r
27 No.	Rosa canina	1+1: Transplant - seed raised: Branched: 3 brks: B	60-80cm	2C/r
Total :513 No.				

Native Hedgerow

Number	Species	Specification	Height	Density
42 No.	Acer campestre	1+1	40-60cm	0.5C/r Double Staggered at 0.5m offset
28 No.	Corylus avellana	1+1	40-60cm	0.5C/r Double Staggered at 0.5m offset
110 No.	Crataegus monogyna	1+1	40-60cm	0.5C/r Double Staggered at 0.5m offset
14 No.	Euonymus europaeus	1+1	40-60cm	0.5C/r Double Staggered at 0.5m offset
14 No.	Ilex aquifolium	1+1 :C	40-60cm	0.5C/r Double Staggered at 0.5m offset
42 No.	Prunus spinosa	1+1	40-60cm	0.5C/r Double Staggered at 0.5m offset
14 No.	Rosa canina	1+1	40-60cm	0.5C/r Double Staggered at 0.5m offset
14 No.	Salix caprea	1+1	40-60cm	0.5C/r Double Staggered at 0.5m offset
Total :278 No.				

Rev.	Date	Amendment	Drawn	Chkd.	Appd.
P3	03.09.15	Revisions to planting and schedule and mown grass areas added. To ensure avoidance of conflicts with CCTV and services, trees moved or relocated following receipt of SKM DRG-OPS-UN60312-40412/A042 Rev P2 Underground Services, SKM-DRG-OPS-UN60312-4028/4029 Rev P2 Hazard Identification and FCL-DRG-OPS-1102 Rev P1 CCTV Layout.	CN	SF	SF
P2	15.08.14	Revision to Drawing Number BCJV-DRG-121097OXP001-PDF. Substation added in northeast corner. Additional planting beds included around southeast. Planting amended to reflect CCTV locations.	GA	SF	SF
P1	15.07.14		GA	SF	SF
P0	03.07.14	FIRST ISSUE	GA	SF	SF

RSK
18 Frogmore Road, Hemel Hempstead, Herts, HP3 9RT.
Tel: +44 (0) 1442 437500
Fax: +44 (0) 1442 437550
Email: info@rsk.co.uk
Web: www.rsk.co.uk

Client
CARILLION BUCKINGHAM JOINT VENTURE

Project Title
EAST WEST RAIL PHASE 1

Drawing Title
OXFORD PARKWAY STATION SOFT LANDSCAPE SHEET 1 - OVERALL SITE PLAN

Drawn	Date	Checked	Date	Approved	Date
GA	02.07.14	SF	02.07.14	SF	03.07.14

Scale	Orig Size	Dimensions
1:1250	A1	METRES

Project No.	Drawing File
121097	121097/04/02/03/01

Drawing No.	Rev.
RSK-DRG-OPS-P001-DWG	P3

Scale
0 15 30 60 90