


3B5P WITH BAY - PRIVATE LAYOUT

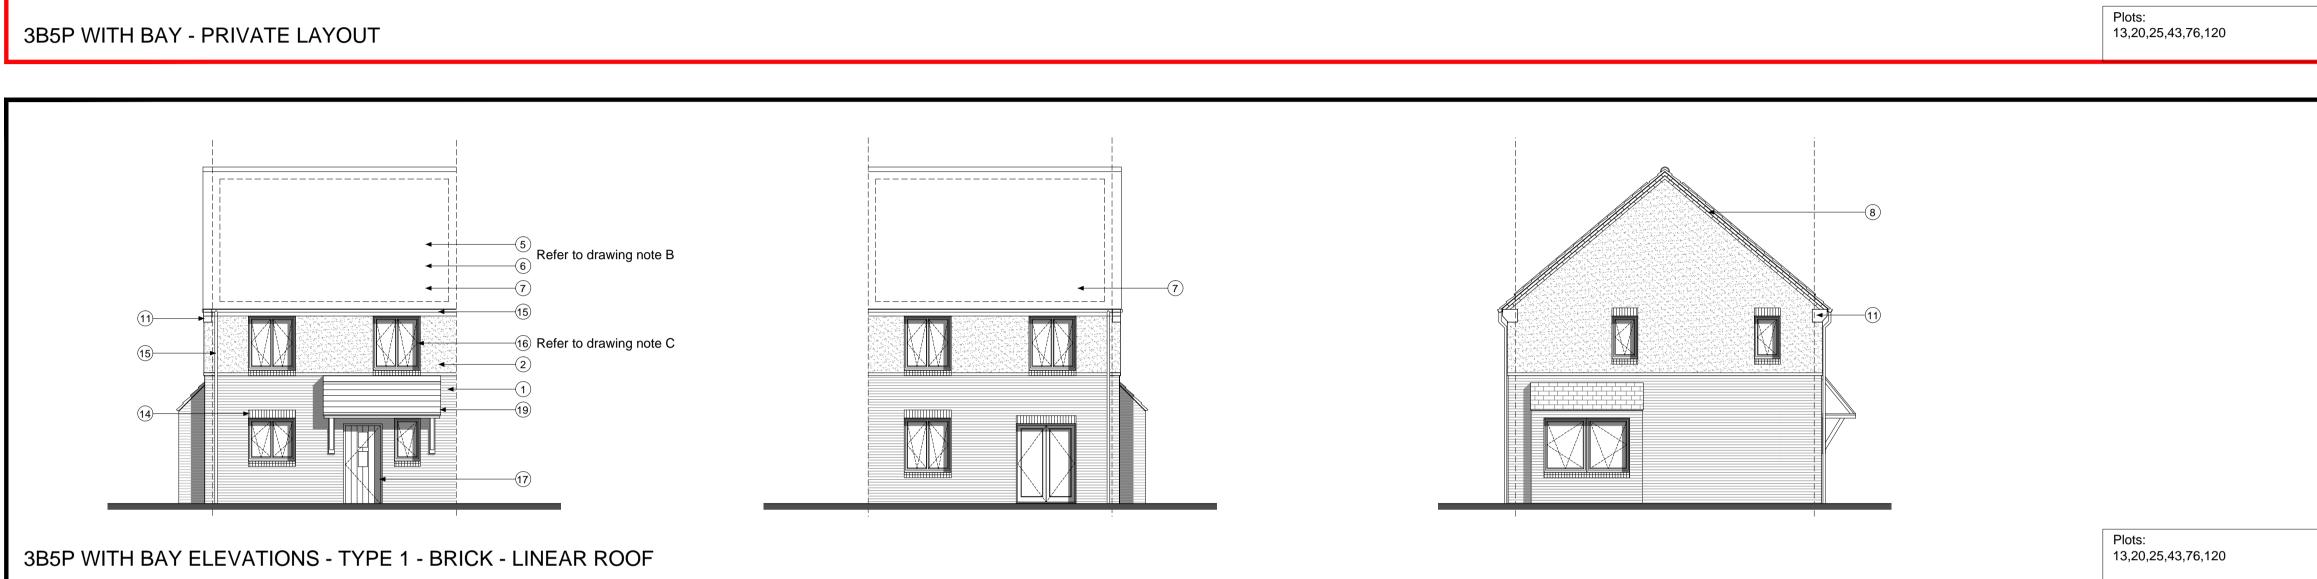

notes
 The contractor is responsible for checking dimensions, tolerances and references. Any discrepancy to be verified with the Architect before
 Proceeding with the works. Where an item is covered by drawings to different scales the larger scale drawing is to be worked to.
- Do not scale drawing. Figured dimensions to be worked to in all cases.
CDM Regulations 2007
ALL current drawings and specifications for the project must be read in conjunction with the Designer's Hazard and Environmental Assessment Record.
Handed Plots: 20,120
3B5P Area: 92.2m2
NOTE A: Gable windows will only apply to plots indicated on drawing: 'AA2699(3)_2007'
<u>NOTE B:</u> For individual plot roof materials refer to drawing 'AA2699(3)2006
NOTE C: All windows to bathrooms are to be
obscured Materials and details key
Face brickwork - Type 1, red multi. Type 3, red multi, Enriched, red multi, buff multi and grey multi.
2 Through colour render; colour ivory
Vertical timber cladding (Thermowood; with natural untreated finish) Coursed stonework (Beckstone 'Natural Light weathered'
 tumbled, laid in random course heights - no jumpers) Marley 'Rivendale' composite slate and ridge tile
 Bradstone Cotswold roof tile and ridge
 Refer to drawing 'AA2699(3)2006' South facing roof slope designated for PV. Refer to drawing
 *AA2699(3)2006' Clipped verge detail. 2no. courses face brickwork laid stretcher bond with natural colour bucket handle mortar
Stretcher bond with natural colour bucket handle mortar joints; brick type / colour: Ibstock 'Capital Multi Stock'
 Reconstituted stone corbel unit (colour: Portland)
1 Brickwork corbel; type / colour to match face brickwork
12 Projecting reconstituted stone string course (colour Portland) to divide base facing material from render above
(13) Re-consitituted stone (colour Portland) heads with drip detail and stooled cill
14 Brickwork window heads and cant brick cills; type / colour to match face brickwork
UPVC gutters & down pipes; colour: black. Fascia and soffit board colour: white (type 1) grey (type 3) black (enriched)
 High performance triple glazed timber window; design to match house type. (colour type 1: white, type 3:grey, enriched: black) IG doorset GRP (NG range) (colour type 1: black, type 3:
 (17) IG doorset GKP (NG range) (colour type 1: black, type 3: grey, enriched: black) (18) Glazed side panel / fanlight to match door
 Entrance canopy; style to match dwelling type and colour to match doors and windows.
20 Up and over garage door; colour to match windows
(21) Double glazed roof light
Inset horizontal timber cladding (Thermowood; with natural untreated finish)
23 Standing seam roof
Grey powder coated metal spandrel panels
 Double height opening with glazing and grey powder coated metal spandrel panels. Colour: grey
20-06-15 A Amendments in line with CDC
comments 22-02-16. Quantity of Enriched units has been reduced and the elevation design amended. Minor amendment to front and rear elevations windows, increased width by half a brick SW/MH 19-10-15 - First Issue. Planning date rev revision/author/checker
client
A2 Dominion
purpose of issue Planning - For Approval
project Bicester Eco Town
Phases 3&4 drawing
3B5P House with bay
Private Layout With all elevation treatment types
drawing no rev AA2699(3)/2105 A
drawn MR checked SW
scale @ A1/A3 1:100 date Oct 2015
PRP Architects ©
10 Lindsey Street Smithfield London EC1A 9HP T +44 (0)20 7653 1200 F +44 (0)20 7653 1201 Ion.prp@prparchitects.co.uk