

PLANTING SCHEDULE

Number	Plant Name	Height	Container	Specification	Density
2365 No.	Carpinus betulus	100-125cm	5L	Branched: 5 brks: C	3/m ²
2208 No.	Escallonia 'Donard Seedling'	40-60cm	5L	Bushy: 5 brks: C	3/m ²
4758 No.	Lonicera nitida 'Maigrün'	7.5L	Bushy: 9 brks: C	3/m ²	
1531 No.	Prunus laurocerasus 'Otto Luyken'	40-60cm	5-7.5L	Bushy: 5 brks: C	3/m ²
Total :10862 No.					

SHRUBS

Number	Plant Name	Height	Container	Specification	Density
676 No.	Aucuba japonica 'Crotonifolia'	40-60cm	5L	Bushy: 3 brks: C	5/m ²
118 No.	Berberis thunbergii 'Atropurpurea Nana'	25-30cm	5L	Branched: 5 brks: C	5/m ²
77 No.	Buddleja davidii	60-80cm	5L	Branched: 5 brks: C	5/m ²
181 No.	Ceanothus 'Blue Mound'	5L	Bushy: 6 brks: C	5/m ²	
506 No.	Choysa 'Aztec Pearl'	30-40cm	5L	Bushy: 6 brks: C	5/m ²
168 No.	Choysa ternata 'Sundance'	40-60cm	7.5L	Bushy: 5 brks: C	5/m ²
260 No.	Cistus x corbariensis	40-60cm	5-7.5L	Bushy: 6 brks: C	5/m ²
221 No.	Cornus alba 'Spaethii'	60-80cm	5L	Branched: 4 brks: C	5/m ²
6 No.	Cosinus corymbosa 'Royal Purple'	60-80cm	10L	Leader: C	1/m ²
648 No.	Euonymus fortunei 'Emerald 'n' Gold'	25-30cm	5-7.5L	Bushy: 9 brks: C	5/m ²
509 No.	Euonymus fortunei 'Silver Queen'	20-30cm	5L	Bushy: 7 brks: C	5/m ²
36 No.	Fatsia japonica	60-80cm	10L	Leader: C	3/m ²
100 No.	Hebe 'Autumn Glory'	30-40cm	5L	Bushy: 7 brks: C	5/m ²
128 No.	Hebe 'Great Orme'	30-40cm	5L	Bushy: 5 brks: C	5/m ²
60 No.	Hebe 'Madsummer Beauty'	30-40cm	5-7.5L	Bushy: 7 brks: C	5/m ²
339 No.	Hebe 'Red Edge'	5-7.5L	Bushy: 7 brks: C	5/m ²	
379 No.	Hebe rakaiensis	5-7.5L	Bushy: 7 brks: C	5/m ²	
92 No.	Hydrangea macrophylla 'Madame Emile Moullere'	40-60cm	5L	Branched: 5 brks: C	5/m ²
68 No.	Hypericum moserianum 'Tricolor'	5-7.5L	Bushy: 7 brks: C	5/m ²	
10 No.	Ilex aquifolium 'Alaska'	80-100cm	10L	Leader with Lateral: C	3/m ²
1236 No.	Lavandula angustifolia 'Hidcote'	20-30cm	5L	Bushy: 7 brks: C	5/m ²
182 No.	Lonicera pileata	5L	Bushy: 8 brks: C	5/m ²	
924 No.	Pachyandra terminalis 'Green Carpet'	5L	Several Shoots: 11 brks: C	5/m ²	
100 No.	Philadelphus 'Belle Etoile'	40-60cm	5-7.5L	Branched: 5 brks: C	5/m ²
86 No.	Philomis frutescens	30-40cm	5-7.5L	Branched: 5 brks: C	5/m ²
756 No.	Rosmarinus officinalis 'Severn Sea'	40-60cm	5L	Bushy: 5 brks: C	5/m ²
1919 No.	Ruscus aculeatus	30-40cm	3L	Several Shoots: 3 brks: C	5/m ²
463 No.	Santolina chamaecyparissus	30-40cm	5L	Bushy: 8 brks: C	5/m ²
445 No.	Sarcococca confusa	30-40cm	7.5L	Bushy: 6 brks: C	5/m ²
1065 No.	Sarcococca hookeriana digyna	30-40cm	5L	Bushy: 6 brks: C	5/m ²
336 No.	Skimmia japonica 'Kew White'	30-40cm	5L	Bushy: 4 brks: C	5/m ²
314 No.	Spiraea japonica 'Goldflame'	30-40cm	5-7.5L	Bushy: 7 brks: C	5/m ²
901 No.	Viburnum davidii	30-40cm	5-7.5L	Bushy: 4 brks: C	5/m ²
334 No.	Viburnum tinus 'Eve Price'	30-40cm	5L	Bushy: 5 brks: C	5/m ²
596 No.	Vinca minor	5-7.5L	Several Shoots: 5 brks: C	5/m ²	
Total :13229 No.					

HERBACEOUS

Number	Plant Name	Container	Specification	Density
133 No.	Agapanthus Headbourne Hybrids	3L	Full Pot: C	5/m ²
124 No.	Ajuga reptans 'Atropurpurea'	2L	Full Pot: C	5/m ²
45 No.	Anemone hepatica 'Prinz Heinrich'	3L	Full Pot: C	5/m ²
148 No.	Aquilegia canadensis	2L	Full Pot: C	5/m ²
30 No.	Aster 'Little Carlow'	3L	Full Pot: C	5/m ²
65 No.	Bergenia 'Bressingham Ruby'	3L	Full Pot: C	5/m ²
62 No.	Bergenia 'Silberlicht'	3L	Full Pot: C	5/m ²
41 No.	Geranium macrorrhizum 'Album'	3L	Full Pot: C	5/m ²
237 No.	Heleium 'Moerhousen Bouary'	3L	Full Pot: C	5/m ²
103 No.	Heleium hoopesii 'The Bishop'	3L	Full Pot: C	5/m ²
453 No.	Heleborus niger	3L	Full Pot: C	5/m ²
165 No.	Hemerocallis 'Crimson Pirate'	3L	Full Pot: C	5/m ²
212 No.	Hemerocallis 'Golden Chimes'	3L	Full Pot: C	5/m ²
300 No.	Hemerocallis 'Stafford'	3L	Full Pot: C	5/m ²
80 No.	Heuchera 'Chocolate Ruffles'	3L	Full Pot: C	5/m ²
96 No.	Heuchera 'Green Ivory'	3L	Full Pot: C	5/m ²
189 No.	Heuchera micrantha 'Palace Purple'	3L	Full Pot: C	5/m ²
52 No.	Nepeta nervosa	3L	Full Pot: C	5/m ²
59 No.	Salvia officinalis 'Tricolor'	3L	Full Pot: C	6/m ²
75 No.	Sedum 'Purple Emperor'	3L	Full Pot: C	5/m ²
10 No.	Sedum 'Ruby Glow'	3L	Full Pot: C	5/m ²
58 No.	Stachys byzantina 'Big Ears'	5-7.5L	Full Pot: C	5/m ²
72 No.	Stachys byzantina 'Silver Carpet'	3L	Full Pot: C	5/m ²
58 No.	Thymus x citriodorus	5L	Full Pot: C	5/m ²
Total :2867 No.				

FERNS

Number	Plant Name	Container	Specification	Density
178 No.	Agplenium scolopendrium	3L	Full Pot: C	5/m ²
369 No.	Dryopteris affinis 'Cristata Angustata'	3L	Full Pot: C	5/m ²
419 No.	Dryopteris filix-mas	3L	Full Pot: C	5/m ²
Total :966 No.				

MARGINAL / AQUATICS

Number	Plant Name	Height	Container	Specification	Density
806 No.	Iris pseudacorus	1.5-2L	Full Pot: C		3/m ²
1342 No.	Phragmites australis	0.5L			3/m ²
718 No.	Sparganium erectum	1.5-2L	Full Pot: Sept to April planting: British Native-origin: C		4/m ²
Total :2866 No.					

GRASSES

Number	Plant Name	Height	Container	Specification	Density
45 No.	Calamagrostis x scutiflora 'Karl Foerster'	3L	Full Pot: C		5/m ²
388 No.	Carex buxifolia	40-60cm	5L	Full Pot: C	5/m ²
101 No.	Carex comans 'Frosted Curti'	3L	Full Pot: C		5/m ²
60 No.	Carex elata 'Aurea'	3L	Full Pot: C		5/m ²
13 No.	Deschampsia cespitosa 'Goldtau'	3L	Full Pot: C		5/m ²
462 No.	Liriope muscari	3L	Full Pot: C		5/m ²
25 No.	Miscanthus sinensis 'Kleine Fontaine'	3L	Full Pot: C		5/m ²
Total :1094 No.					

LEGEND

- Existing Vegetation to be retained
- Proposed tree planting
- Proposed hedge
- Proposed shrub/herbaceous planting
- Native hedgerow
- Aquatic/Marginal planting
- Grass: Meadow (EM1 - Basic general purpose meadow mixture by Emongate seeds or similar approved)
- Grass: Wetland (EGS - Meadow grass mixture for wetlands by Emongate seeds or similar approved)

GENERAL NOTES

This drawing is to be used for planting information only, and is subject to alteration through changes to the site layout or until approved by the area designer.

Any species substitution by the contractor must be verified with the Landscape Architect through the Job Architect.

This layout must be checked in accordance with NHBC Standards 2013 (Chapter 4.2 - Building Near Trees & Chapter 9.2 Drives, Paths and Landscaping) by the Regional Engineer prior to implementation.

Excavations: Contractors must ensure that they have full information relating to service and drainage positions before undertaking any excavations.

Root barriers to be used in association with tree planting adjacent to kerbs / services / footpaths etc. (Greenleaf ReRoot products or similar application, in accordance with manufacturers instructions).

NOTES:


Please note all planting mixes should be planted as follows:

Shrubs/Grasses to be planted in groups of 3-5 to the rear of the mix area. With herbaceous to be planted in groups of 3 randomly throughout mix area.

For Landscape Specification refer to drawing 1619 A6 17

For Rain Gardens refer to drawing 1619 A6 04

For Tree Specification refer to drawing 1619 A6 03

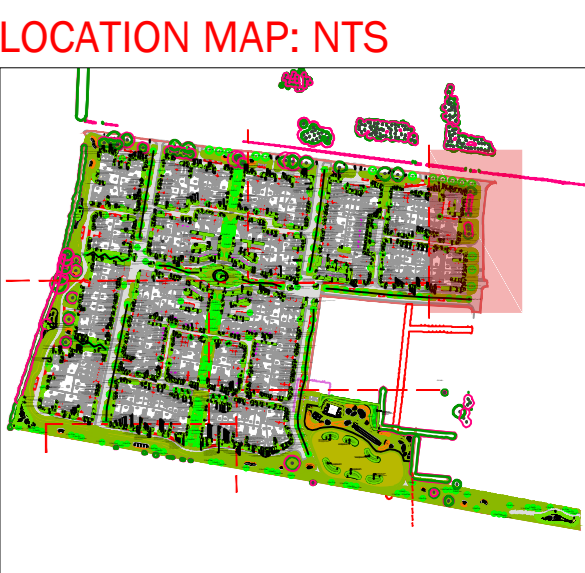

Rev	Date	Description
A	11.11.16	Tree No. reduced following comments