




KEY:

OCC Refuse Vehicle

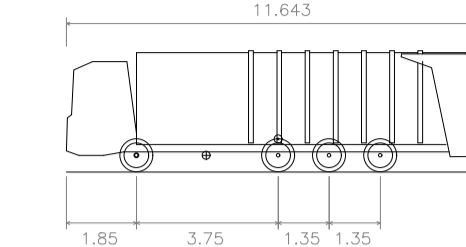

Overall Length 11.643m  
 Overall Width 2.500m  
 Overall Body Height 3.205m  
 Min Body Ground Clearance 0.410m  
 Track Width 2.500m  
 Lock-to-lock time 4.00s  
 Wall to Wall Turning Radius 11.250m

Vehicle Tracking Elements:



Key Distances:

For more information on Refuse Collection please refer to Part H (H6) of the Building Regulations.

--- Resident carry distance should not be more than 30m to point of collection.

--- Waste collection vehicles should be able to get within 25m of the collection / storage point and the gradient between the two should not exceed 1:12.

BS 5906: 2005 recommends a maximum reversing distance of 12m, however, longer distances can be considered but any reversing routes should be straight and free from obstacles or visual obstructions.

BCP Proposed Bin Collection Point (for consideration)

PRELIMINARY - FOR PLANNING

C	24.04.18	Revised in accordance with current planning layout.	AJW
B	03.04.18	Revised in accordance with current planning layout.	AJW
A	23.01.18	Revised in accordance with current planning layout (extents and layout).	AJW
REV. No.	DATE	DESCRIPTION	INITIALS

Client CREST NICHOLSON		<b>MJA CONSULTING</b> CIVIL AND STRUCTURAL ENGINEERS Monarch House, Barton Lane, Abingdon, Oxon, OX14 3NB Tel: 01235 555173 Fax: 01235 523226	
Project Bodicote, Banbury			
Title Refuse Collection Strategy (tracking & key distances)	Scale 1:500 @A1	Date Dec' 2017	Drawing No. 5692:P90
Checked KTG	Drawn AJW	Rev C	