




KEY:

OCC Refuse Vehicle

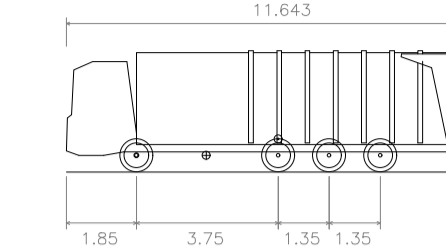

Overall Length	11.643m
Overall Width	2.500m
Overall Body Height	3.205m
Min Body Ground Clearance	0.410m
Track Width	2.500m
Lock-to-lock time	4.00s
Wall to Wall Turning Radius	11.250m

Vehicle Tracking Elements:

- Wheel track
- Body loci

Key Distances:

For more information on Refuse Collection please refer to Part H (H6) of the Building Regulations.

- - - Resident carry distance should not be more than 30m to point of collection.
- - - Waste collection vehicles should be able to get within 25m of the collection / storage point and the gradient between the two should not exceed 1:12.
- L BS 5906: 2005 recommends a maximum reversing distance of 12m, however, longer distances can be considered but any reversing routes should be straight and free from obstacles or visual obstructions.
- BCP Proposed Bin Collection Point (for consideration)

PRELIMINARY - FOR PLANNING

A	23.01.18	Revised in accordance with current planning layout (extents and layout).	AJW
REV. No.	DATE	DESCRIPTION	INITIALS
Client		CREST NICHOLSON	MJA CONSULTING CIVIL AND STRUCTURAL ENGINEERS Monarch House, Barton Lane, Abingdon, Oxon, OX14 3NB Tel: 01235 555173 Fax: 01235 523226
Project		Bodicote, Banbury	
Title	Refuse Collection Strategy (tracking & key distances)	Scale	1:500 @A1
Checked	KTG	Date	Dec' 2017
Drawn	AJW	Drawing No.	5692:P90
Rev	A		