





KEY:

OCC Refuse Vehicle

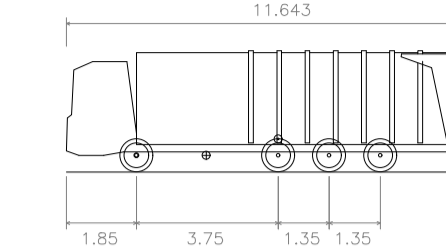

Overall Length	11.643m
Overall Width	2.500m
Overall Body Height	3.205m
Min Body Ground Clearance	0.410m
Track Width	2.500m
Lock-to-lock time	4.00s
Wall to Wall Turning Radius	11.250m

Vehicle Tracking Elements:

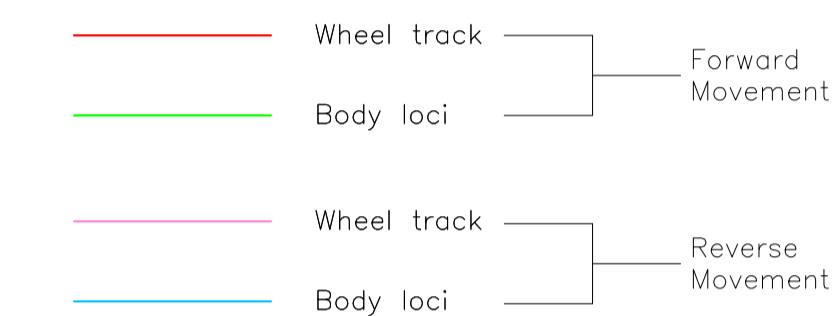

Key Distances:

For more information on Refuse Collection please refer to Part H (H6) of the Building Regulations.

BS 5906: 2005 recommends a maximum reversing distance of 12m, however, longer distances can be considered but any reversing routes should be straight and free from obstacles or visual obstructions.

BCP Proposed Bin Collection Point (for consideration)

PRELIMINARY - FOR PLANNING

A	20.07.18	Revised in accordance with current planning layout (extents and layout).	AJW																
REV. No.	DATE	DESCRIPTION	INITIALS																
Client		CREST NICHOLSON																	
Project		Bodicote, Banbury																	
Title		Refuse Collection Strategy - Phase 2 (tracking & key distances)	<table border="1"> <tr> <td>Scale</td> <td>1:500 @A1</td> <td>Date</td> <td>July 2018</td> <td>Drawing No.</td> <td>5692:P91</td> <td>Rev</td> <td>A</td> </tr> <tr> <td>Checked</td> <td>KTG</td> <td>Drawn</td> <td>AJW</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	Scale	1:500 @A1	Date	July 2018	Drawing No.	5692:P91	Rev	A	Checked	KTG	Drawn	AJW				
Scale	1:500 @A1	Date	July 2018	Drawing No.	5692:P91	Rev	A												
Checked	KTG	Drawn	AJW																