

Table A6 B1
Car parking provision in new developments for urban areas in Cherwell

Number of bedrooms per dwelling	Number of allocated spaces	Number of spaces when 2 allocated spaces per dwelling are provided		Number of spaces when 1 allocated space per dwelling are provided		Number of unallocated spaces when no allocated spaces are provided
		Allocated spaces	Unallocated spaces	Allocated spaces	Unallocated spaces	
1	1	N/A	N/A	1	0.4	1.2
2	2	2	0.3	1	0.6	1.4
2/3	2	2	0.3	1	0.7	1.5
3	2	2	0.3	1	0.8	1.7
3/4	2	2	0.4	1	1.0	1.9
4+	2	2	0.5	1	1.3	2.2







Note 1: The rows in the table for 2/3 bedrooms and 3/4 bedrooms can be used when there are additional rooms in the dwelling which are not shown as bedrooms but where there is a high chance that they could be used as bedrooms.


Note 2: The Council will consider North West Bloister Ecotown as a special case provided that certain minimum criteria are met. If there is a full range of every day services provided within easy walking or cycling distance of the dwelling and convenient access to an efficient public transport system accessing a wider range of services including employment, one allocated car parking space per dwelling will be required, regardless of dwelling size or tenure. This may be on plot or off plot. Off plot provision may be grouped in a parking court provided the courts are small, close by, secure and conveniently accessed. Additional unallocated off plot car parking may also be provided according to the principles of this document up to a maximum of one space per dwelling. A lower standard of parking may be acceptable dependent upon the layout and accessibility to services and to other modes of transport in agreement with the Highway Authority.

ADOPTED PARKING STANDARDS



KEY: PARKING STRATEGY

-  APPLICATION BOUNDARY
- PARKING TYPOLOGIES:**
-  **HARDSTANDING (ALLOCATED)** 102
-  **GARAGE (6x3m INC. CYCLE STORAGE)** 57
-  **INTEG GARAGE** 2
- TOTAL (ALLOCATED)** 161
-  **PARKING (UNALLOCATED)** 14
-  **SECURE CYCLE PARKING**

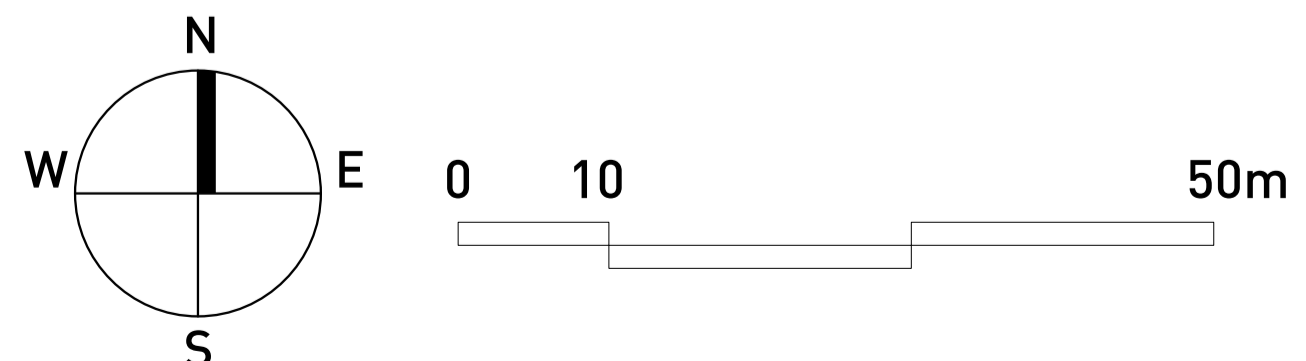

OXFORD ROAD, BODICOTE - PARKING STRATEGY - PHASE 2 Pegasus Design