

Ref. Code: AP024

Date: April 2016




## Low Profile Over-Fascia Vent

### Product Description

Corovent over-fascia vents provide discreet eaves ventilation. The vents are strong and robust. They will resist the weight of tiles and slates, and also resist crushing by foot. The vents can be used on their own or in conjunction with other Corovent products, and are part of the Corovent ventilation kits.

- Provides continuous 10mm ventilation into the roof void
- Unique low profile design only 16mm high
- Minimum disruption to eaves detail
- Simple to fix

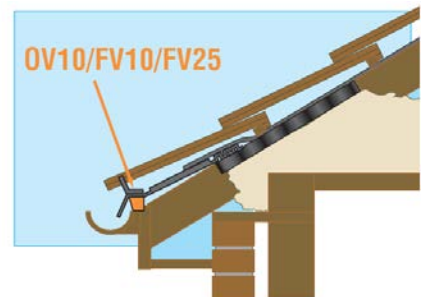

<b>Product Requirements</b>	<b>OV10</b>
<b>Statutory Requirements</b>	To provide ventilation at the eaves of a roof in accordance with Building Regs Document C2 & BS5250:2011 and The Building Standards (Scotland) Regulations. To achieve clear 10mm ventilation along the eaves (10,000mm <sup>2</sup> per metre)
<b>Functional Requirements</b>	To fit properly on fascia and provide eaves ventilation. To be easily installed and be suitable for use with other Corovent products. To ensure a continuous 10mm ventilation gap is provided at the eaves. Prevent birds, large insects and vermin from entering the roof void.

Product Specifications	
Code	<b>OV10</b>
Height	16mm
Width	32mm
Length	1000mm ± 10mm
Material	HDPE
Colour	Black
Weight	0.12Kg
No. of Ventilation Slots	168
Vent Slot Width	4mm
Vent Slot Depth	24mm

