



Isometric View
1500mm Castle tree grille
Single tray (or similar approved)

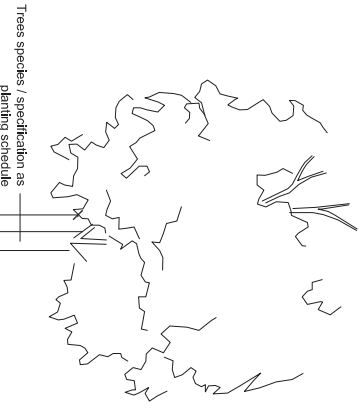

Tree species / specification as
planning schedule

Notes:
All trees planted within 3000mm from
underground services, kerbs or
infiltration blankets should include root
barriers as indicated


For all tree pit locations/positions refer to
General Arrangement drawings

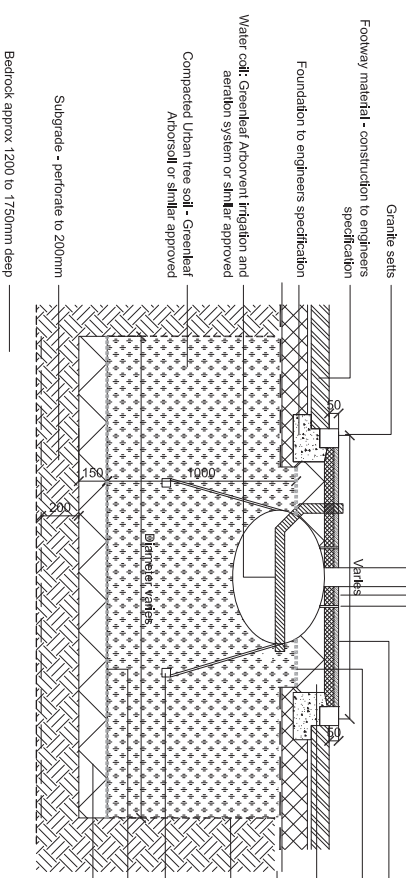


TP-H-B Tree pit detail: Recycled Glass aggregate resin bound paving

Tree species / specification as
planning schedule

Loose recycled firm glass chipbrags (colour to match resin bound gravel) within collar
Steel tree collar edge resistant
Sureset resin bound recycled glass (6mm) aggregate paving or similar approved
Geotextile membrane, Terram 1000 or similar approved
150mm lightly compacted sub-base - No fines
Tensar Geogrid or similar approved to engineers specification
Root barrier fit tree pit within 3000mm of underground services or kerbs - Greenleaf Retrod 1000 or similar approved
Underground Guving - Greenleaf Arboriguy Tree guying system or similar approved
Geotextile membrane, Terram 1000 or similar approved
150mm clear washed stone to be included as necessary, 40mm single sized washed stone, no fines - each pit to be inspected following excavation to assess soil conditions and need for drainage layer.

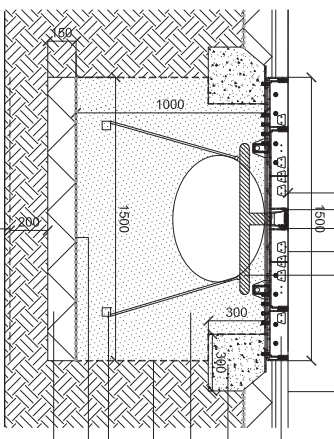

TP-H-A Tree pit detail: Primary Road - Castle tree grille (or similar approved)

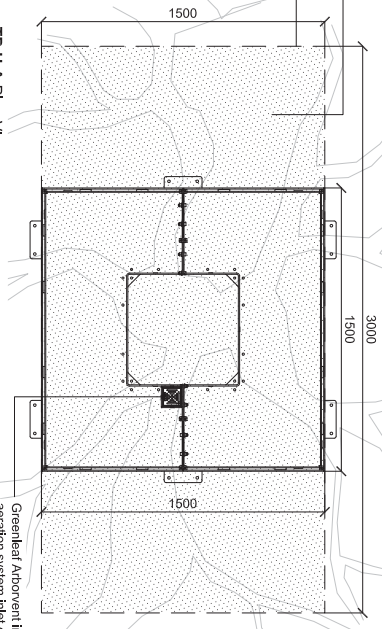

TP-H-A Plan View
1500mm Greenleaf Castle recessed tree grille (Single tray) - Galvanised Paving Infill to match footway material

Tree Pit Details

Scale: 1:20

0 100 200 400mm

Type: Greenleaf Castle Tree Grille (Single tray)
Material: Segments: Mild steel
Frame: Galvanized mild steel
Fittings: Stainless steel
Finish: Galvanized to BS EN 146 1999
Colour: Galvanized

Type: SureSet Tree Collar
Material: SureSet glass aggregate resin bound paving
Infill: SureSet glass aggregate resin bound paving

All Construction to Manufacturer's recommendations
All supplier details see or similar approved

For details of pit locations see drawings UA001881-701-114 to 118

Revision	Description	Date
06	Annotation updated granite setts added	16-08-2013
05	Annotation amendment	31-01-2013
04	Annotation amendment	11-01-13
03	Foundation to tree hoop altered	14-12-12
02	Or similar approve added to named products Additional detail added	01-10-12
01	DRAFT	06-09-12

Issue	Description	Date
01	DRAFT	06-09-12

Status: NOT FOR CONSTRUCTION

Scale: 1:20

Author	Current Issue	Signature
B CONNOLLY		[Signature]
A2	Checker	[Signature]
A VICTORY	Approver	[Signature]
DATUM	Approver	[Signature]
R KITCH	Approver	[Signature]

File Name: UA001881-701-801 TREE PIT DETAILS - HARD DWG

Client: [Redacted]

azdominion

HYDER CONSULTING (UK) Limited
5th Floor, The Pilary
All Saints Street
Bristol, England
BS1 2NL
Tel: +44 (0)870 000 3003
Fax: +44 (0)870 000 3003

Hyder

Project: Bicester Eco Development

Title: Tree Pit Details
Castle Grille / Sureset

Project No: 701-800- UA001881 - 06

Issue: 06

701-800- UA001881 - 06